## **SIEMENS**

Data sheet 3RV2011-1JA10



Circuit breaker size S00 for motor protection, CLASS 10 A-release 7...10 A N release 130 A screw terminal Standard switching capacity





product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	9.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Weight	0.351 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Environmental footprint	
global warming potential [CO2 eq] total	74.698 kg
global warming potential [CO2 eq] during manufacturing	1.98 kg
global warming potential [CO2 eq] during sales	0.134 kg
global warming potential [CO2 eq] during operation	72.7 kg
global warming potential [CO2 eq] after end of life	-0.116 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
Main circuit	
number of poles for main current circuit	3

adjustable current recogness value current of the current	7 10 A
adjustable current response value current of the current- dependent overload release	7 10 A
operating voltage	
• rated value	20 690 V
• at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	10 A
operational current	
at AC-3 at 400 V rated value	10 A
• at AC-3e at 400 V rated value	10 A
operating power	
• at AC-3	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	and the same of th
maximum control contro	
	100 kA
• at AC at 240 V rated value	100 kA 100 kA
<ul><li>at AC at 240 V rated value</li><li>at AC at 400 V rated value</li></ul>	100 kA
<ul><li>at AC at 240 V rated value</li><li>at AC at 400 V rated value</li><li>at AC at 500 V rated value</li></ul>	100 kA 42 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> operating short-circuit current breaking capacity (Ics) at AC	100 kA 42 kA 6 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> </ul>	100 kA 42 kA 6 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> </ul>	100 kA 42 kA 6 kA 100 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> </ul>	100 kA 42 kA 6 kA 100 kA 100 kA 42 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> at 690 V rated value	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 42 kA
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> </ul>	100 kA 42 kA 6 kA 100 kA 100 kA 42 kA
at AC at 240 V rated value  at AC at 400 V rated value  at AC at 500 V rated value  at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  at 400 V rated value  at 500 V rated value  at 690 V rated value  response value current of instantaneous short-circuit trip unit  UL/CSA ratings	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 42 kA
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit  UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value	100 kA 42 kA 6 kA 100 kA 100 kA 42 kA 4 kA
at AC at 240 V rated value  at AC at 400 V rated value  at AC at 500 V rated value  at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  at 400 V rated value  at 500 V rated value  at 690 V rated value  response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  at 480 V rated value  at 600 V rated value  yielded mechanical performance [hp]	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit  UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor	100 kA 42 kA 6 kA 100 kA 100 kA 42 kA 4 kA 130 A
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value at 230 V rated value at 230 V rated value	100 kA 42 kA 6 kA 100 kA 100 kA 42 kA 4 kA 130 A
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 500 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for 3-phase AC motor</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A  10 A 10 A
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 500 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for 3-phase AC motor</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A 10 A 10 A
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 200/230 V rated value</li> <li>at 220/230 V rated value</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A 10 A 10 A 10 A
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A 10 A 10 A  0.5 hp 1.5 hp 2 hp 3 hp 5 hp
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A 10 A 10 A 10 A
<ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>operating short-circuit current breaking capacity (Ics) at AC</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> </ul>	100 kA 42 kA 6 kA  100 kA 100 kA 42 kA 4 kA 130 A  10 A 10 A 10 A 10 A  0.5 hp 1.5 hp 2 hp 3 hp 5 hp

design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit	magnetic
protection of the main circuit	
• at 400 V	gL/gG 50 A
• at 500 V	gL/gG 40 A
• at 690 V	gL/gG 40 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm
width	45 mm
depth	97 mm
required spacing	
<ul> <li>with side-by-side mounting at the side</li> </ul>	0 mm
<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	20
— downwards	30 mm
— upwards	30 mm
<ul><li>— at the side</li><li>• for grounded parts at 690 V</li></ul>	9 mm
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	V 11111
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	2x (0,75 2,5 mm²), 2x 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for main contacts	2x (18 14), 2x 12
tightening torque	
for main contacts with screw-type terminals	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	M2
• for main contacts Safety related data	M3
Safety related data	Yes
product function suitable for safety function suitability for use	1 53
Suitability for use	

<ul> <li>safety-related switching on</li> </ul>	No
<ul> <li>safety-related switching OFF</li> </ul>	Yes
service life maximum	10 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	50 %
B10 value with high demand rate according to SN 31920	5 000
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	
General Product Approval	







Confirmation



<u>KC</u>

General Product Approval

For use in hazardous locations

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



Marine / Shipping











Miscellaneous

other

other

Railway

Environment

Confirmation



Special Test Certificate

Confirmation



Siemens EcoTech



Environment

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1JA10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1JA10

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1JA10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-1JA10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1JA10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1JA10&objecttype=14&gridview=view1

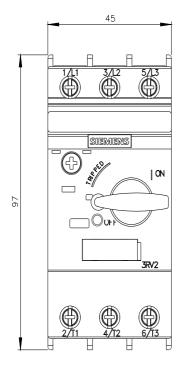

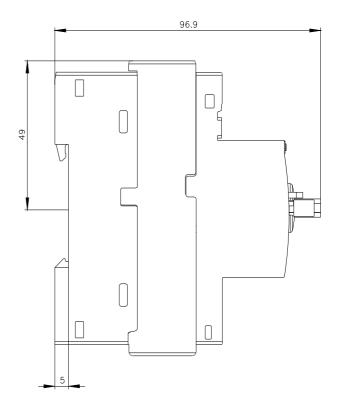

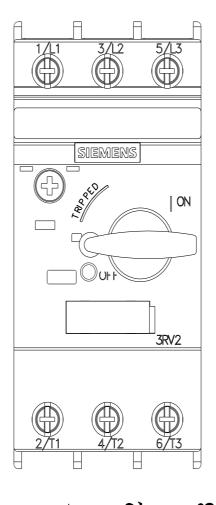

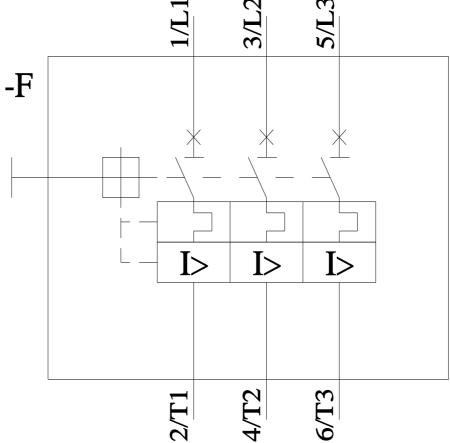

last modified: 11/6/2024 🖸