


5 4 3 2 1



Wire	_____	Cu tinned
Gauge	_____	AWG 28/7
Voltage rating	_____	300 Vr.m.s
Conductor resistance	_____	221 mΩ/m
Capacity unbalanced	_____	42,7 pF/m
Impedance unbalanced	_____	105 Ω
Inductance unbalanced	_____	0,68 μH/m
Signal delay	_____	4,9 ns/m
Insulation material	_____	PVC
Temperature rating	_____	-20°C to +105°C
Flammability rating	_____	UL: VW1
Insulation resistance	_____	10 000 MΩ/km

Colour code sequence (in 10 steps):

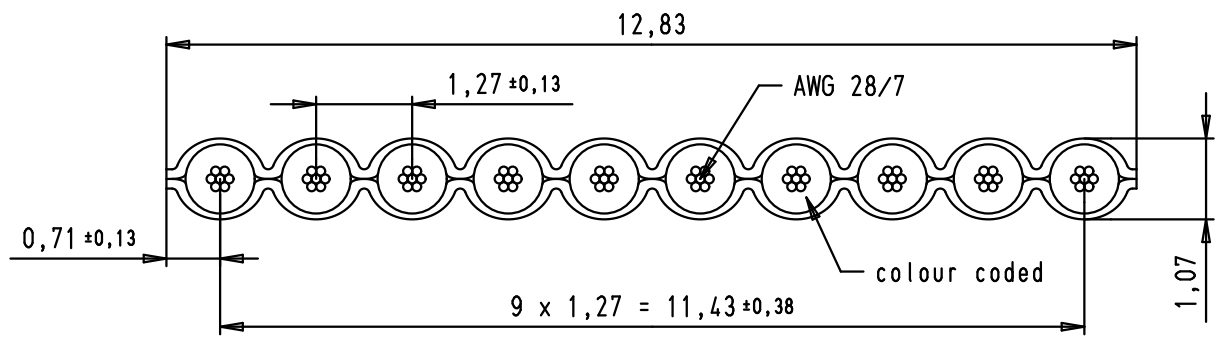

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

D

C

B

A

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable	Maßstab/ Scale
			Detail.	20/10/05	JMDR		10 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	10:1
			Insp.					
			Stand.					
33990	14/05/07	PK	HARTING EURL F-95972 Paris				TB 09 18 010 7005	Blatt/ Page
33246	20/10/05	JMDR					Sub.	1/1
Mod.	Dot.	Name						