

Data Sheet | Item Number: 216-246


Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

<https://www.wago.com/216-246>



Color: ■ blue

Similar to illustration

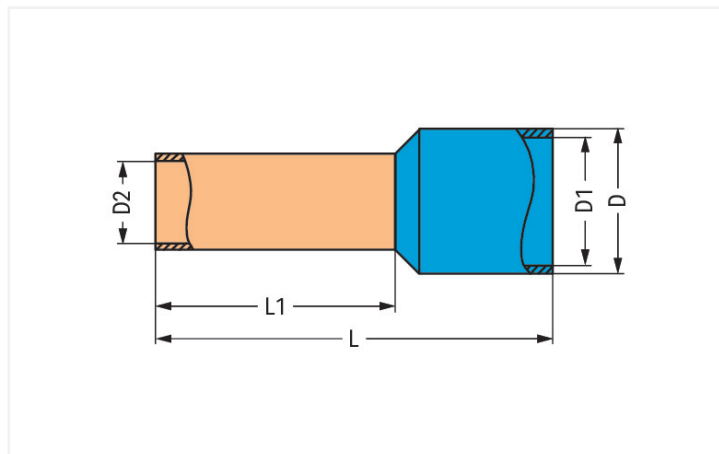

Dimensions in mm

Connection data

Cross-section metric	2.5 mm ²
Strip length	12 ... 13 mm / 0.47 ... 0.51 inches
Cross-section AWG	14 AWG

Physical data

Wall thickness plastic collar	0.25 mm
Total length	17 mm
Wall thickness crimp sleeve	0.15 mm
Crimp length (length of sleeve)	10 mm
Inner Diameter plastic collar	4.2 mm
Diameter crimp sleeve inside	2.2 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2002 Series

Material data

Color	blue
Fire load	0 MJ
Weight	0.2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918051101
Customs tariff number	85369010000

Product classification		
UNSPSC		39121405

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-246

↓

Documentation				
Bid Text				
216-246	19.02.2019	xml	2.80 KB	↓
216-246	11.09.2017	doc	23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable