


Item (Detail view)

2-conductor through terminal block; 16 mm²; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®

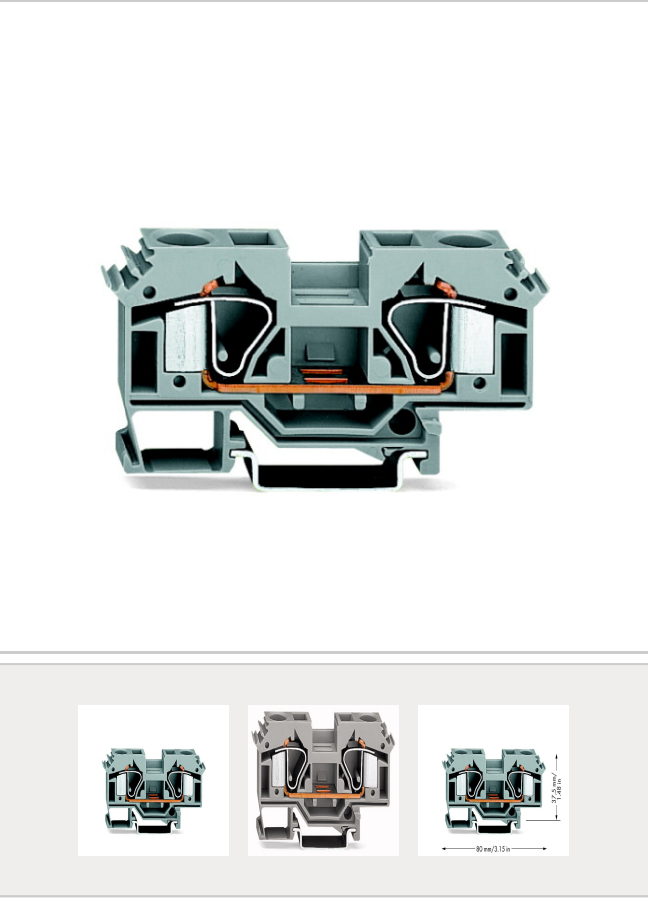

Item no.	283-601	GTN / EAN	400821413134
Content	1 piece	Order unit	piece
Order quantity	25	Increase in order quantity	(25, 50, 75, 100, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	CN	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company. Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ☒ Compliant

Article details	Approvals	Downloads/Certificates	Accessories																																																																											
Description		2-conductor through terminal block; 16 mm²; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®																																																																												
Remarks																																																																														
Item properties		Miscellaneous <table><tr><th>Name</th><th>Value</th><th>Unit</th></tr><tr><td>Connection technology</td><td>CAGE CLAMP®</td><td></td></tr><tr><td>Actuation type</td><td>Operating tool</td><td></td></tr><tr><td>Connectable conductor materials</td><td>Copper</td><td></td></tr><tr><td>Solid conductor</td><td>0.2 ... 16 mm² / 24 ... 6 AWG</td><td></td></tr><tr><td>Fine-stranded conductor</td><td>0.2 ... 16 mm² / 24 ... 6 AWG</td><td></td></tr><tr><td>Strip length</td><td>16 ... 17 mm / 0.63 ... 0.67 inch</td><td></td></tr><tr><td>Total number of connection points</td><td>2</td><td></td></tr><tr><td>Total number of potentials</td><td>1</td><td></td></tr><tr><td>Number of levels</td><td>1</td><td></td></tr><tr><td>Type of wiring</td><td>Front-entry wiring</td><td></td></tr><tr><td>Width</td><td>12 mm / 0.472 in</td><td></td></tr><tr><td>Height from upper-edge of DIN-35 rail</td><td>37.5 mm / 1.476 in</td><td></td></tr><tr><td>Depth</td><td>80 mm / 3.15 in</td><td></td></tr><tr><td>Design</td><td>horizontal</td><td></td></tr><tr><td>Type of mounting</td><td>Carrier rail 35 x 15</td><td></td></tr><tr><td>Marking level</td><td>Slide marking</td><td></td></tr><tr><td>Color</td><td>gray</td><td></td></tr><tr><td>Insulating material</td><td>Polyamide 66 (PA 66)</td><td></td></tr><tr><td>Fire load [MJ]</td><td>0.468</td><td>MJ</td></tr><tr><td>Weight [g]</td><td>31.622</td><td>g</td></tr><tr><td>Packaging type</td><td>BOX</td><td></td></tr><tr><td>[mm]</td><td>12</td><td>mm</td></tr><tr><td>Main product function</td><td>Through term. block</td><td></td></tr><tr><td>Product type</td><td>Through rail-mount term. blocks</td><td></td></tr></table>		Name	Value	Unit	Connection technology	CAGE CLAMP®		Actuation type	Operating tool		Connectable conductor materials	Copper		Solid conductor	0.2 ... 16 mm² / 24 ... 6 AWG		Fine-stranded conductor	0.2 ... 16 mm² / 24 ... 6 AWG		Strip length	16 ... 17 mm / 0.63 ... 0.67 inch		Total number of connection points	2		Total number of potentials	1		Number of levels	1		Type of wiring	Front-entry wiring		Width	12 mm / 0.472 in		Height from upper-edge of DIN-35 rail	37.5 mm / 1.476 in		Depth	80 mm / 3.15 in		Design	horizontal		Type of mounting	Carrier rail 35 x 15		Marking level	Slide marking		Color	gray		Insulating material	Polyamide 66 (PA 66)		Fire load [MJ]	0.468	MJ	Weight [g]	31.622	g	Packaging type	BOX		[mm]	12	mm	Main product function	Through term. block		Product type	Through rail-mount term. blocks	
Name	Value	Unit																																																																												
Connection technology	CAGE CLAMP®																																																																													
Actuation type	Operating tool																																																																													
Connectable conductor materials	Copper																																																																													
Solid conductor	0.2 ... 16 mm² / 24 ... 6 AWG																																																																													
Fine-stranded conductor	0.2 ... 16 mm² / 24 ... 6 AWG																																																																													
Strip length	16 ... 17 mm / 0.63 ... 0.67 inch																																																																													
Total number of connection points	2																																																																													
Total number of potentials	1																																																																													
Number of levels	1																																																																													
Type of wiring	Front-entry wiring																																																																													
Width	12 mm / 0.472 in																																																																													
Height from upper-edge of DIN-35 rail	37.5 mm / 1.476 in																																																																													
Depth	80 mm / 3.15 in																																																																													
Design	horizontal																																																																													
Type of mounting	Carrier rail 35 x 15																																																																													
Marking level	Slide marking																																																																													
Color	gray																																																																													
Insulating material	Polyamide 66 (PA 66)																																																																													
Fire load [MJ]	0.468	MJ																																																																												
Weight [g]	31.622	g																																																																												
Packaging type	BOX																																																																													
[mm]	12	mm																																																																												
Main product function	Through term. block																																																																													
Product type	Through rail-mount term. blocks																																																																													

Upwards