

## Technical data sheet

### Optical distance sensor

Part no.: 50041203  
ODSL 30/D232-30M-S12

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Notes
- Accessories



Figure can vary



## Technical data

### Basic data

Series	30
Contains	Mounting bracket
Application	Collision protection of cranes / gantry cranes Fill-level monitoring Length measurement in material cutting Positioning of skillet systems and side-tracking skates
Type of scanning system	Against object

### Characteristic parameters

### Optical data

Light source	Laser, Red
Laser class	2, IEC/EN 60825-1:2014
Light spot size [at sensor distance]	6 mm [10,000 mm]
Type of light spot geometry	Round

### Measurement data

Measurement range	200 ... 30,000 mm, In combination with cooperative target CTS 100x100
Measurement range (6 ... 90 % diffuse reflection)	0 ... 5 mm
Measurement range (90 % diffuse reflection)	0 ... 2 mm
Resolution	0.1 mm display resolution, adjustable
Measurement time	30 ... 100 ms
Temperature drift	0 mm/K
Referencing	Yes
Standard measurement object	100 x 100 mm <sup>2</sup>
Optical distance measurement principle	Phase measurement

### Electrical data

Protective circuit	Polarity reversal protection Short circuit protected
--------------------	---

### Performance data

Supply voltage $U_B$	10 ... 30 V, DC
Residual ripple	0 ... 15 %, From $U_B$

### Inputs

Number of digital switching inputs	2 Piece(s)
------------------------------------	------------

### Switching inputs

#### Digital switching input 1

Assignment	Connection 1, pin 2
Function	Programmable

#### Digital switching input 2

Assignment	Connection 1, pin 5
Function	Programmable

### Outputs

Number of digital switching outputs	2 Piece(s)
-------------------------------------	------------

### Switching outputs

Switching voltage	high: $\geq(U_B - 2V)$
-------------------	------------------------

### Switching output 1

Assignment	Connection 1, pin 4
Switching element	Transistor, Push-pull

### Switching output 2

Assignment	Connection 1, pin 6
Switching element	Transistor, Push-pull

### Timing

Readiness delay	0.001 ms
-----------------	----------

### Interface

Type	RS 232
------	--------

### RS 232

Function	Process
Data encoding	14 bit HEX 16 bit HEX ASCII Remote Control (ASCII)

### Connection

Number of connections	1 Piece(s)
-----------------------	------------

### Connection 1

Function	Signal IN Signal OUT Voltage supply
----------	---

Type of connection	Connector
--------------------	-----------

Thread size	M12
-------------	-----

Type	Male
------	------

Material	Plastic
----------	---------

No. of pins	8 -pin
-------------	--------

Encoding	A-coded
----------	---------

### Mechanical data

Design	Cubic
--------	-------

Dimension (W x H x L)	79 mm x 69 mm x 150 mm
-----------------------	------------------------

Housing material	Metal
------------------	-------

Metal housing	Diecast aluminum
---------------	------------------

Lens cover material	Glass
---------------------	-------

Net weight	650 g
------------	-------

Housing color	Gray
---------------	------

	Silver
--	--------

Type of fastening	Mounting thread
-------------------	-----------------

	Supplied mounting bracket
--	---------------------------

### Operation and display

Type of display	LC Display
-----------------	------------

	LED
--	-----

Operational controls	LC Display
----------------------	------------

	Membrane keyboard
--	-------------------

### Environmental data

Ambient temperature, operation	-10 ... 45 °C
--------------------------------	---------------

Ambient temperature, storage	-40 ... 70 °C
------------------------------	---------------

## Technical data

### Certifications


Degree of protection	IP 67
Protection class	II
Certifications	cUR us
Standards applied	IEC 60947-5-2

### Classification

Customs tariff number	90318020
eCl@ss 5.1.4	27270801
eCl@ss 8.0	27270801
eCl@ss 9.0	27270801
eCl@ss 10.0	27270801
eCl@ss 11.0	27270801
ETIM 5.0	EC001825
ETIM 6.0	EC001825
ETIM 7.0	EC001825

## Dimensioned drawings

All dimensions in millimeters

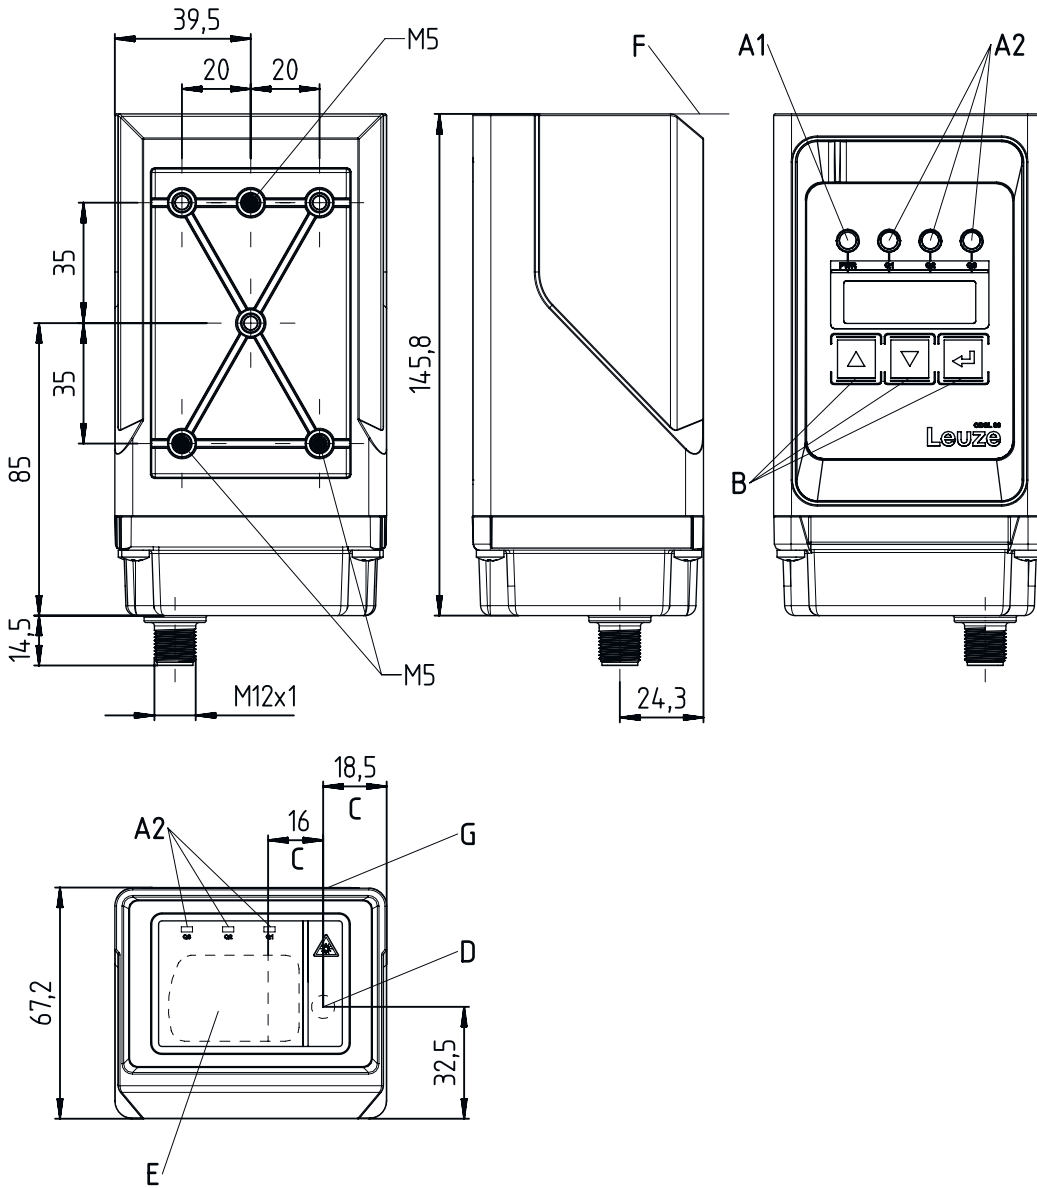

- A1 Green indicator diode
- A2 Yellow indicator diode
- B Control buttons
- C Optical axis
- D Transmitter

- E Receiver
- F Reference edge for the measurement (distance zero point)
- G Sight for coarse alignment


## Electrical connection

### Connection 1

Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Type	Male
Material	Plastic
No. of pins	8 -pin
Encoding	A-coded

### Pin Pin assignment

Pin	Pin assignment
1	+10...30 V DC
2	active/reference
3	GND
4	Q1
5	teach Q1/Q2
6	Q2
7	RS 232 TxD
8	RS 232 RxD



## Notes



### Observe intended use!



- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.



### ATTENTION! LASER RADIATION – CLASS 2 LASER PRODUCT



#### Do not stare into beam!

The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 56 from May 08, 2019.

- ⚠ Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ⚠ Do not point the laser beam of the device at persons!
- ⚠ Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- ⚠ When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- ⚠ CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- ⚠ Observe the applicable statutory and local laser protection regulations.
- ⚠ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

## Notes

### NOTE




#### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- ☞ Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- ☞ Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- ☞ Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

## Accessories

### Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

## General

Part no.	Designation	Article	Description
50104599	CTS 100x100	Cooperative target	Mounting dimension: 122 mm x 105 mm x 4.6 mm Reflective surface: 100 mm x 100 mm Reflector material: Ceramic Material of base material: Metal Type of fastening: Screw type

### Note



- ☞ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.