


# TIGER CLAW™ PASS-THROUGH SOCKET

(2.54 mm) .100" PITCH • BCS SERIES

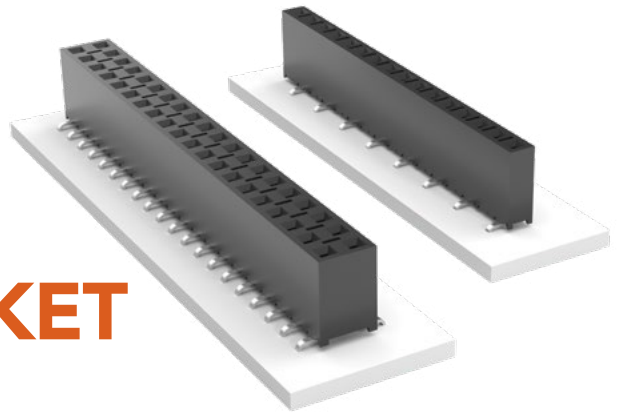

## BCS

### Mates:

TSW, MTSW, HTSW,  
HMTSW, TSS, ZSS, DW, EW,  
ZW, HW, TSM, MTLW, PHT

## SPECIFICATIONS

### Insulator Material:

Black Liquid Crystal Polymer

### Contact Material:

Phosphor Bronze

### Plating:

Au or Sn over  
50 μ" (1.27 μm) Ni

### Current Rating (BCS/TSW):

4.6 A per pin

(2 pins powered)

### Voltage Rating:

475 VAC

(-TE/-DE/-PE mated with TSM)

450 VAC

(-HE mated with TSW)

### Operating Temp Range:

-55 °C to +125 °C

### Insertion Depth:

(4.34 mm) .171" to  
(7.24 mm) .285" from top,  
(5.64 mm) .222" plus board  
thickness minimum from bottom.  
-HE is (4.34 mm) .171"  
to (6.35 mm) .250"

## PROCESSING

### Lead-Free Solderable:

Yes

## ALSO AVAILABLE

Other Platings  
(MOQ Required)

BCS	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	ENTRY OPTION	OTHER OPTION
-----	---	------------------	----------------	------------	--------------	--------------

01 thru 50

**-F**  
= Gold flash  
on contact,  
Matte Tin on tail

**-L**  
= 10 μ" (0.25 μm)  
Gold on contact,  
Matte Tin on tail

**-S**  
= Single

**-D**  
= Double









**-TE**  
= Top Entry

**-DE**  
= Top Entry  
(For Bottom Entry  
specify -DE-BE)  
Cannot be used with  
plated through-holes

**-PE**  
= Pass-through Entry  
(For Bottom Entry  
specify -PE-BE)

**-HE**  
= Horizontal Entry

**-"XXX"**  
= Polarized Position  
(-BE not available)

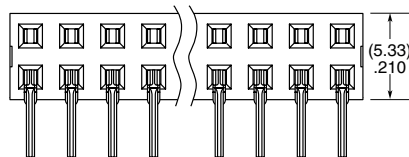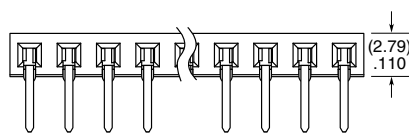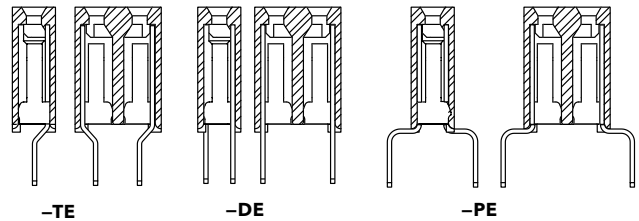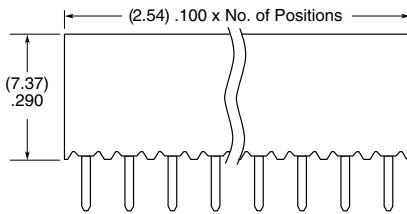

### Note:

Some lengths, styles and  
options are non-standard,  
non-returnable.