

# Monitoring Relays 1-Phase True RMS AC/DC Over or Under Current Types DIB01, PIB01



- TRMS AC/DC over or under current monitoring relay
- Current measuring through internal shunt
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 mA to 10 A AC/DC
- Adjustable current on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DIB01) or plug-in module (PIB01)
- 22.5 mm Euronorm housing (DIB01) or 36 mm plug-in module (PIB01)
- LED indication for relay, alarm and power supply ON
- Galvanically separated power supply


## Product Description

DIB01 and PIB01 are precise TRMS AC/DC over or under current (selectable by DIP-switch) monitoring relays. Direct measuring or through current transformer. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function

can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay. Through the built-in shunt it is possible to monitor loads up to 10 A AC/DC.

## Ordering Key

**DIB 01 C B23 5A**

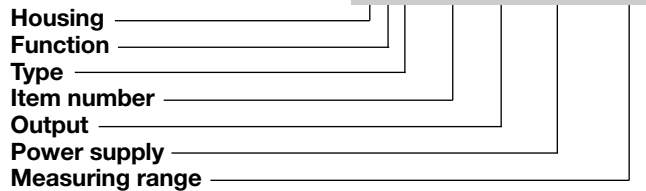

## Type Selection

Mounting	Output	Measuring range	Supply: 24 VDC	Supply: 48 VDC	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	0.1 to 5 mA AC/DC	DIB 01 C 724 5mA	DIB 01 C 748 5mA	DIB 01 C B48 5mA	DIB 01 C B23 5mA
		1 to 50 mA AC/DC	DIB 01 C 724 50mA	DIB 01 C 748 50mA	DIB 01 C B48 50mA	DIB 01 C B23 50mA
		10 to 500 mA AC/DC	DIB 01 C 724 500mA	DIB 01 C 748 500mA	DIB 01 C B48 500mA	DIB 01 C B23 500mA
		0.1 to 5 A AC/DC	DIB 01 C 724 5A	DIB 01 C 748 5A	DIB 01 C B48 5A	DIB 01 C B23 5A
Plug-in	SPDT	1 to 10 A AC/DC	DIB 01 C 724 10A	DIB 01 C 748 10A	DIB 01 C B48 10A	DIB 01 C B23 10A
		0.1 to 5 mA AC/DC	PIB 01 C 724 5mA	PIB 01 C 748 5mA	PIB 01 C B48 5mA	PIB 01 C B23 5mA
		1 to 50 mA AC/DC	PIB 01 C 724 50mA	PIB 01 C 748 50mA	PIB 01 C B48 50mA	PIB 01 C B23 50mA
		10 to 500 mA AC/DC	PIB 01 C 724 500mA	PIB 01 C 748 500mA	PIB 01 C B48 500mA	PIB 01 C B23 500mA
		0.1 to 5 A AC/DC	PIB 01 C 724 5A	PIB 01 C 748 5A	PIB 01 C B48 5A	PIB 01 C B23 5A
		1 to 10 A AC/DC	PIB 01 C 724 10A	PIB 01 C 748 10A	PIB 01 C B48 10A	PIB 01 C B23 10A

## Input Specifications

Input (current level)	Terminals Y1, Y2	Terminals 5, 7	Measuring ranges (cont.)	Internal resist.	Max. curr.
DIB01			<b>..500MA:</b> 10 to 100 mA AC/DC 20 to 200 mA AC/DC 50 to 500 mA AC/DC Max. current for 1 s	0.5 Ω	700 mA
PIB01					
<b>Measuring ranges</b>	<b>Internal resist.</b>	<b>Max. curr.</b>	<b>..5A:</b> 0.1 to 1 A AC/DC 0.2 to 2 A AC/DC 0.5 to 5 A AC/DC Max. current for 1 s	0.05 Ω	6 A
Direct					
Selectable by DIP-switch			<b>..10A:</b> 1 to 10 A AC/DC Max. current for 1 s	3 mΩ	11 A
<b>..5MA:</b> 0.1 to 1 mA AC/DC	50 Ω	50 mA			
0.2 to 2 mA AC/DC	50 Ω	50 mA			15 A
0.5 to 5 mA AC/DC	50 Ω	50 mA			15 A
Max. current for 1 s		100 mA			15 A
<b>..50MA:</b> 1 to 10 mA AC/DC	5 Ω	150 mA			11 A
2 to 20 mA AC/DC	5 Ω	150 mA			50 A
5 to 50 mA AC/DC	5 Ω	150 mA			50 A
Max. current for 1 s		500 mA			50 A

## Input Specifications (cont.)

Measuring ranges (cont.)		
Standard CT (examples)	AAC <sub>rms</sub>	Max. curr.
TADK2 50 A/5 A	5 to 50 A	60 A
TAD2 150 A/5 A	15 to 150 A	180 A
TAD6 400 A/5 A	40 to 400 A	480 A
TAD12 1000 A/5 A	100 to 1000 A	1200 A
TACO200 6000 A/5 A	600 to 6000 A	7200 A

**Note:**  
The input voltage cannot raise over 300 VAC/DC with respect to ground (PIB01 only)

Contact input	
DIB01	Terminals Z1, Y1
PIB01	Terminals 8, 9
Disabled	> 10 kΩ
Enabled	< 500 Ω
Latch disable	> 500 ms

## Output Specifications

<b>Output</b>	SPDT relay
Rated insulation voltage	250 VAC
<b>Contact ratings (AgSnO<sub>2</sub>)</b>	μ
Resistive loads AC 1	8 A @ 250 VAC
DC 12	5 A @ 24 VDC
Small inductive loads AC 15	2.5 A @ 250 VAC
DC 13	2.5 A @ 24 VDC
<b>Mechanical life</b>	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	≥ 10 <sup>5</sup> operations (at 8 A, 250 V, cos φ = 1)
<b>Operating frequency</b>	~ 7200 operations/h
<b>Dielectric strength</b>	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

## Supply Specifications

<b>Power supply</b>	Overvoltage cat. III (IEC 60664, IEC 60038)	
Rated operational voltage through terminals:		
A1, A2 or A3, A2 (DIB01)		
2, 10 or 11, 10 (PIB01)		
724:	24 VDC ± 20%, insulated	
784:	48 VDC ± 20%, insulated	
B48:	24/48 VAC ± 15%	
	45 to 65 Hz, insulated	
B23:	115/230 VAC ± 15%	
	45 to 65 Hz, insulated	
<b>Dielectric voltage</b>	<b>DC supply</b>	<b>AC supply</b>
Supply to input	2 kV	4 kV
Supply to output	4 kV	4 kV
Input to output	4 kV	4 kV
<b>Rated operational power</b>		
AC	4 VA	
DC	3 W	

## General Specifications

<b>Power ON delay</b>	1 s ± 0.5 s or 6 s ± 0.5 s
<b>Reaction time</b>	(input signal variation from -20% to +20% or from +20% to -20% of set value)
Alarm ON delay	< 100 ms
Alarm OFF delay	< 100 ms
<b>Accuracy</b>	(15 min warm-up time)
Temperature drift	± 1000 ppm/°C
Delay ON alarm	± 10% on set value ± 50 ms
Repeatability	± 0.5% on full-scale
<b>Indication for</b>	
Power supply ON	LED, green
Alarm ON	LED, red (flashing 2 Hz during delay time)
Output relay ON	LED, yellow
<b>Environment</b>	(EN 60529)
Degree of protection	IP 20
Pollution degree	3 (DIB01), 2 (PIB01)
Operating temperature	-20 to 60°C, R.H. < 95%
Storage temperature	-30 to 80°C, R.H. < 95%
<b>Housing</b>	
Dimensions	DIB01 22.5 x 80 x 99.5 mm PIB01 36 x 80 x 94 mm
<b>Weight</b>	Approx. 150 g
<b>Screw terminals</b>	
Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Approvals</b>	UL, CSA (except 748)
<b>CE Marking</b>	Yes
<b>EMC</b>	
Immunity	Electromagnetic Compatibility
Emission	According to EN 61000-6-2 According to EN 61000-6-3

## Dimensions

