

# Ceramic High Pass Filter

## HFTC-16+

50Ω 1900 to 2700 MHz



Generic photo used for illustration purposes only

CASE STYLE: FR933

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C


Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN	2
RF OUT	5
GROUND	1,3,4,6

### Product Marking: HF2


### Outline Drawing

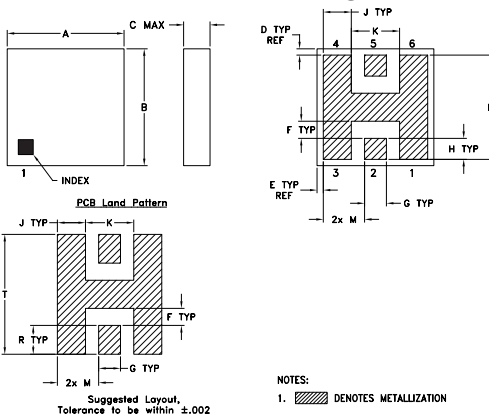

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.150	.150	.034	.008	.008	.022	.028	.027
3.81	3.81	0.864	0.203	0.203	0.559	0.711	0.686
J	K	L	M	R	T	wt	
.036	.062	.134	.053	.037	.154	grams	
0.914	1.575	3.404	1.346	0.940	3.912	0.15	

### Demo Board MCL P/N: TB-233 Suggested PCB Layout (PL-112)

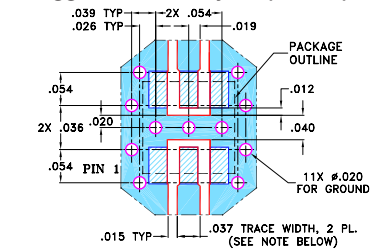

- NOTES:  
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- miniature size, 0.15"X0.15"X0.034"
- low profile, 0.034" height
- low pass-band insertion loss, 1.0 dB typ.
- excellent input power handling, 14W
- hermetically sealed

### Applications


- sub-harmonic rejection
- transmitters/receivers
- dc blocking

### Electrical Specifications (T<sub>AMB</sub>=25°C)


STOP BAND (MHz)	f <sub>co</sub> , MHz Nom.	PASSBAND (MHz)	VSWR (:1)	POWER INPUT* (W)	MARKING	NO. OF SECTIONS
(loss > 40 dB)	(loss > 3 dB)	(loss < 1.3 dB)	Stopband Passband			
DC-1030	Typ.	Typ.	Typ.	Typ.		
1300	1580	1900-2700	18 1.3	14	HF2	7

\* Derate linearly to 6W at 100°C ambient.

### typical frequency response

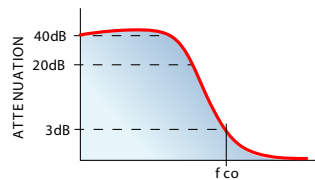

### electrical schematic

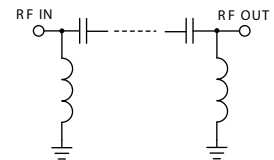

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	104.25	384.41
1030.00	44.43	40.06
1300.00	23.10	21.36
1580.00	3.03	1.89
1900.00	1.06	1.12
2900.00	1.18	2.10
4000.00	1.64	2.86
6500.00	0.84	1.29
8000.00	1.84	2.88
9000.00	1.50	1.66

