

Semiconductor Fuses DIN Type



Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 500 to 690 VAC DIN 000

GERMAN STANDARD
gRB - URB from 20 to 400 A
Size: 000

- EXTREMELY HIGH BREAKING CAPACITY FUSES: PROTECTION OF POWER SEMICONDUCTORS ACCORDING TO IEC 60269-1 and 4
- 690V VOLTAGE RATING (RATING 20 TO 400 A)
- gR CLASS (gRB RATINGS 20 TO 125 A) ACCORDING TO VDE 636-23
- CLEARING ALL OVERLOADS
- IMPROVING SAFETY AND PROTECTION
- ENABLING SELECTIVE COORDINATION WITH ALL FUSES
- aR CLASS (URB RATINGS 80 TO 400 A) ACCORDING TO VDE 636-23 AND IEC 60269.4
- ALL MODELS COMPLYING WITH DIN 43653-00C ARE WITH OR WITHOUT BLOWN FUSE INDICATION WITH TRIP INDICATOR
- MODEL COMPLYING WITH DIN 43620 (00C) STANDARD WITH BLOWN FUSE INDICATION - WITH TRIP INDICATOR



Main Characteristics

Voltage rating U_N (VAC)	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 \text{ ms}$ I^2tp (A ² s)	Total clearing $I^2t @ 660V$ I^2tt (A ² s)	Watts loss		Tested Breaking Capacity	Estimated Breaking Capacity
					0.8 IN	IN		
690	gRB	16	8,2	60	-	5,6	200 k A @ 690 V	300 k A @ 690 V
		20	12	80	3.8	7		
		25	20	150	5.0	9		
		32	39	270	5.5	10		
		40	70	460	6.6	12		
		50	102	730	7.7	14		
		63	210	1500	8.8	16		
		80	475	2900	9.9	18		
		100	970	6000	11	20		
		125	1900	11800	11.6	21		
690	URB	80	390	2500	11.6	21	200 k A @ 690 V	300 k A @ 690 V
		100	690	4200	12.7	23		
		125	1300	8900	14.3	26		
		160	2700	16000	17.0	31		
		200	5250	31500	19.8	36		
		250	9900	52000	24.8	45		
500	URB	350	22400	110000*	31.9	58	120 k A @ 500 V	
		400	33200	160000*	36.3	66		

* @ U_n

Minimum operating voltage for blown fuse indicator: 20 V

Minimum operating voltage for trip-indicator: 20 V


Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 500 to 690 VAC DIN 000

German standard blade-type DIN 43620 with trip-indicator

Current rating	Designation	Ref. Number	I/N*	Catalog Number
16	6,9 GRB 000 PV016	Y210609	1	PC000GB69V16PV
20	6,9 GRB 000 PV020	Z210610	1	PC000GB69V20PV
25	6,9 GRB 000 PV025	A210611	1	PC000GB69V25PV
32	6,9 GRB 000 PV032	B210612	1	PC000GB69V32PV
40	6,9 GRB 000 PV040	C210613	1	PC000GB69V40PV
50	6,9 GRB 000 PV050	D210614	1	PC000GB69V50PV
63	6,9 GRB 000 PV063	E210615	1	PC000GB69V63PV
80	6,9 GRB 000 PV080	F210616	1	PC000GB69V80PV
100	6,9 GRB 000 PV100	G210617	1	PC000GB69V100PV
125	6,9 GRB 000 PV125	H210618	0,9	PC000GB69V125PV

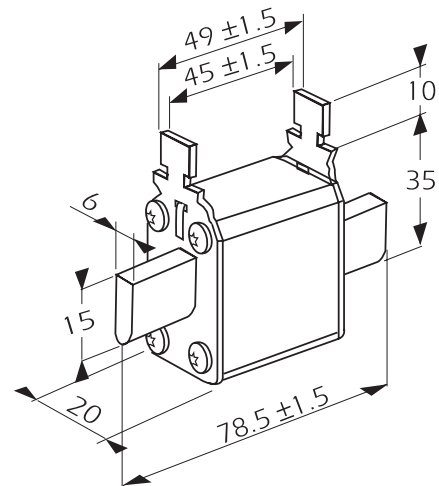

Microswitches
MS 4L 2-5 B6 + PRES Ref. F210156
MS 4L 2-5 B2 + PRES Ref. G210157


Weight: 150g
Packaging: 3 pieces

* Fuse base: 00-EP Ref Number F215170
Pull out grip handle: Ref Number K217244

German standard without blown fuse indicator



Current rating	Designation	Ref. Number	I/N*	Catalog Number
16	6,9 GRB 000 D08/016	L330060	1	DN000GB69V16
20	6,9 GRB 000 D08/020	D330030	1	DN000GB69V20
25	6,9 GRB 000 D08/025	E330031	1	DN000GB69V25
32	6,9 GRB 000 D08/032	F330032	1	DN000GB69V32
40	6,9 GRB 000 D08/040	G330033	1	DN000GB69V40
50	6,9 GRB 000 D08/050	H330034	1	DN000GB69V50
63	6,9 GRB 000 D08/063	J330035	1	DN000GB69V63
80	6,9 GRB 000 D08/080	A330073	1	DN000GB69V80
100	6,9 GRB 000 D08/100	S330112	1	DN000GB69V100
125	6,9 GRB 000 D08/125	T330113	0,9	DN000GB69V125
80	6,9 URB 000 D08/080	K330036	1	DN000UB69V80
100	6,9 URB 000 D08/100	L330037	1	DN000UB69V100
125	6,9 URB 000 D08/125	M330038	0,9	DN000UB69V125
160	6,9 URB 000 D08/160	N330039	0,85	DN000UB69V160
200	6,9 URB 000 D08/200	P330040	0,85	DN000UB69V200
250	6,9 URB 000 D08/250	Q330041	0,8	DN000UB69V250
315	6,9 URB 000 D08/315	R330042	0,7	DN000UB69V315
350	5 URB 000 D08/350	V330114	0,7	DN000UB50V350
400	5 URB 000 D08/400	D330191	0,65	DN000UB50V400

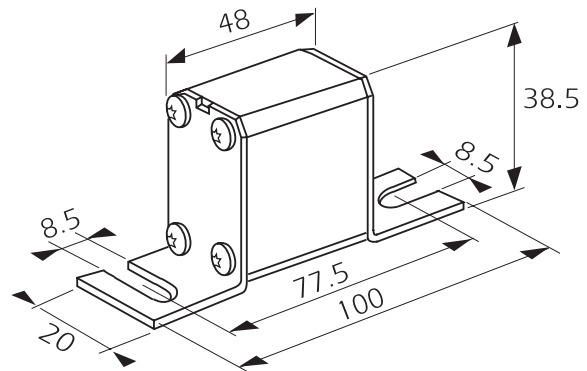

* Fuse base: SI 000 DIN 80
Ref. Number: C220710


Weight: 130 g
Packaging: 6 pieces

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 500 to 690 VAC DIN 000

German standard with blown fuse indicator



Current rating	Designation	Ref. Number	I/I _N * fuse base	Catalog Number
16	6,9 gRB 000 D08V/016	C330190	1	DN000GB69V16V
20	6,9 gRB 000 D08V/020	P330017	1	DN000GB69V20V
25	6,9 gRB 000 D08V/025	Q330018	1	DN000GB69V25V
32	6,9 gRB 000 D08V/032	R330019	1	DN000GB69V32V
40	6,9 gRB 000 D08V/040	S330020	1	DN000GB69V40V
50	6,9 gRB 000 D08V/050	T330021	1	DN000GB69V50V
63	6,9 gRB 000 D08V/063	V330022	1	DN000GB69V63V
80	6,9 gRB 000 D08V/080	G330102	1	DN000GB69V80V
100	6,9 gRB 000 D08V/100	Q330110	1	DN000GB69V100V
125	6,9 gRB 000 D08V/125	R330111	0,9	DN000GB69V125V
80	6,9 URB 000 D08V/080	W330023	1	DN000UB69V80V
100	6,9 URB 000 D08V/100	X330024	1	DN000UB69V100V
125	6,9 URB 000 D08V/125	Y330025	0,95	DN000UB69V125V
160	6,9 URB 000 D08V/160	Z330026	0,85	DN000UB69V160V
200	6,9 URB 000 D08V/200	A330027	0,85	DN000UB69V200V
250	6,9 URB 000 D08V/250	B330028	0,8	DN000UB69V250V
315	6,9 URB 000 D08V/315	C330029	0,7	DN000UB69V315V
350	5 URB 000 D08V/350	W330115	0,7	DN000UB69V350V
400	5 URB 000 D08V/400	E330192	0,65	DN000UB69V400V

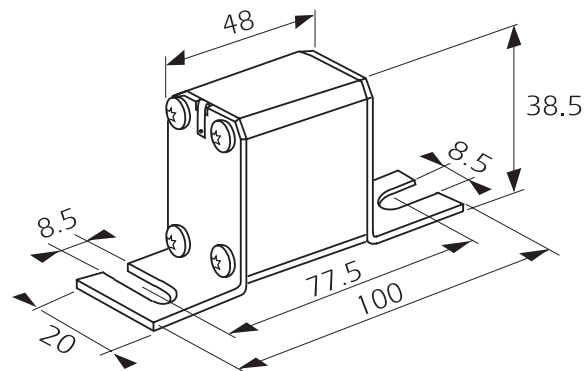


Weight: 130 g
Packaging: 6 pieces

Fuse base: SI 000 DIN 80 Ref. Number : C 20710

German standard with trip-indicator



Current rating	Designation	Ref. Number	I/I _N * fuse base	Catalog Number
16	6,9 gRB 000 D08L/016	X330277	1	DN000GB69V16L
20	6,9 gRB 000 D08L/020	J330173	1	DN000GB69V20L
25	6,9 gRB 000 D08L/025	K330174	1	DN000GB69V25L
32	6,9 gRB 000 D08L/032	L330175	1	DN000GB69V32L
40	6,9 gRB 000 D08L/040	M330176	1	DN000GB69V40L
50	6,9 gRB 000 D08L/050	N330177	1	DN000GB69V50L
63	6,9 gRB 000 D08L/063	P330178	1	DN000GB69V63L
80	6,9 gRB 000 D08L/080	Q330179	1	DN000GB69V80L
100	6,9 gRB 000 D08L/100	R330180	1	DN000GB69V100L
125	6,9 gRB 000 D08L/125	S330181	0,9	DN000GB69V125L
80	6,9 URB 000 D08L/080	T330182	1	DN000UB69V80L
100	6,9 URB 000 D08L/100	V330183	1	DN000UB69V100L
125	6,9 URB 000 D08L/125	W330184	0,95	DN000UB69V125L
160	6,9 URB 000 D08L/160	X330185	0,85	DN000UB69V160L
200	6,9 URB 000 D08L/200	Y330186	0,85	DN000UB69V200L
250	6,9 URB 000 D08L/250	Z330187	0,8	DN000UB69V250L
315	6,9 URB 000 D08L/315	A330188	0,7	DN000UB69V315L
350	5 URB 000 D08L/350	B330189	0,7	DN000UB69V350L
400	5 URB 000 D08L/400	F330193	0,65	DN000UB69V400L

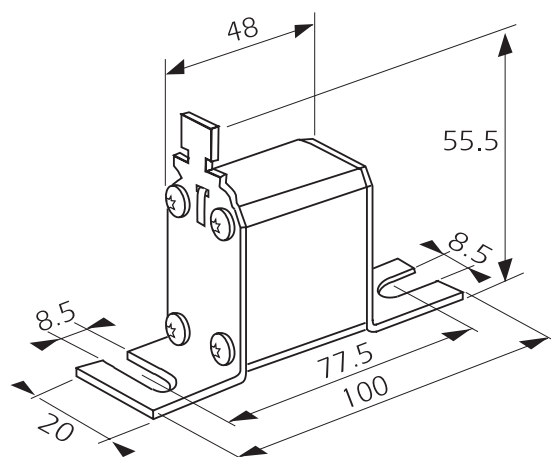

Weight: 130 g
Packaging: 6 pieces




Microswitch
MC 4L 2-5 B6 + PRES Ref. Number : F210156
MC 4L 2-5 B2 + PRES Ref. Number : G210157
Fuse base: SI 000 DIN 80 Ref. Number : C 20710

Semiconductor (AC) fuses




Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 500 to 690 VAC DIN 000

Total clearing I^2t

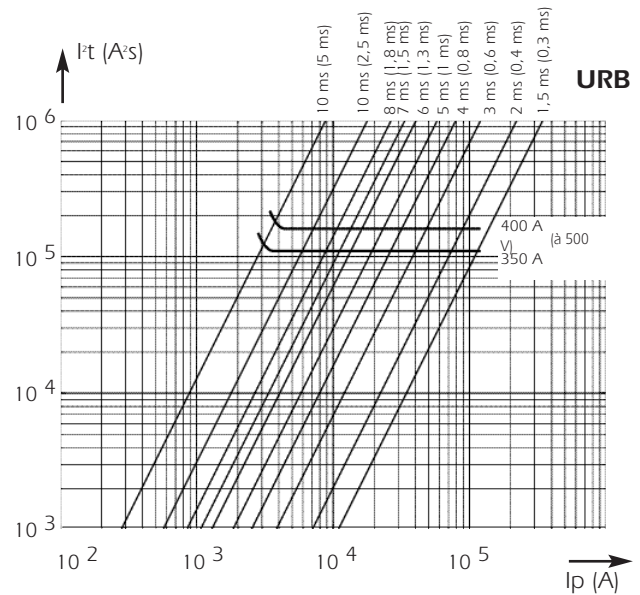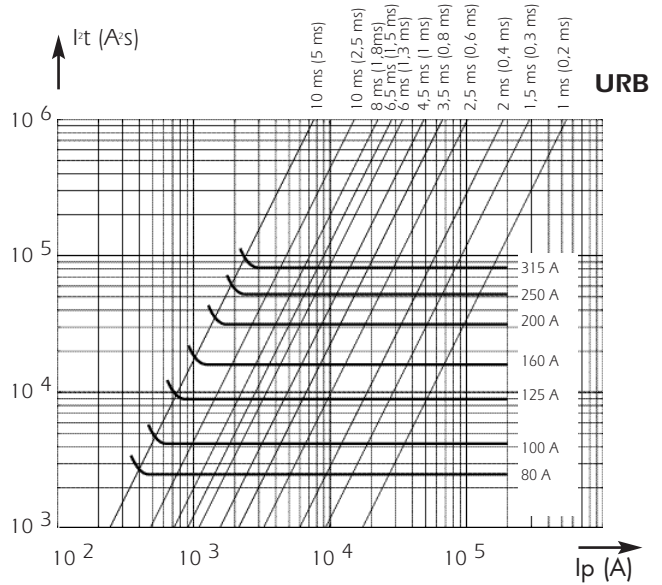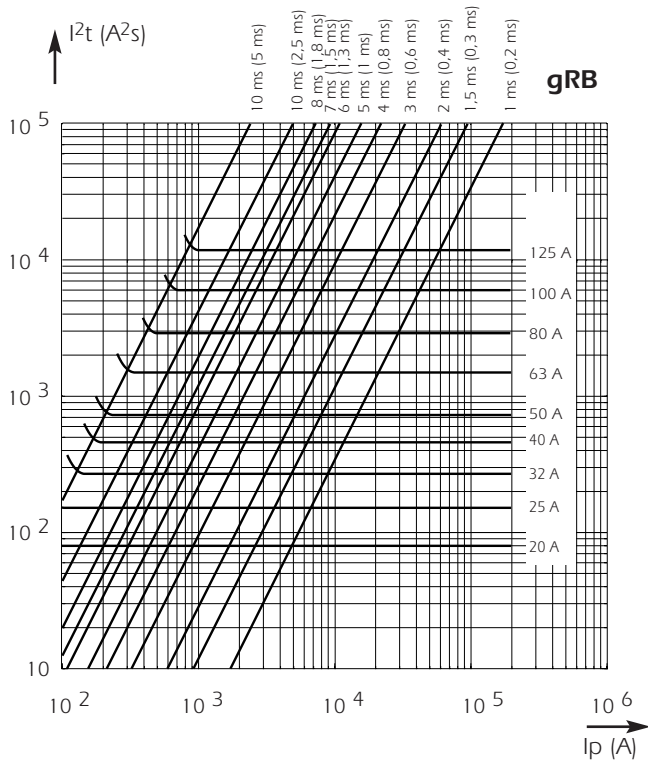


Above: Horizontal curves show, for each rated current, values of total clearing I^2t (I^2t_t) as a function of prospective current I_p . @ UN with $\cos \phi = 0.15$. Oblique lines indicate total clearing duration T_t , with associated pre-arcing duration in brackets.

I^2t corrective factor

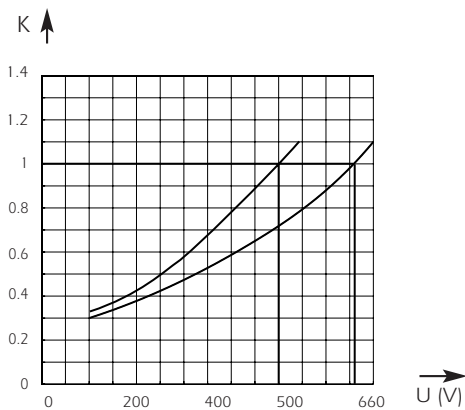

Above: Mean curves show variation of total clearing time (I^2t_t) and total clearing duration T_t as a function of operating voltage U .

Peak arc voltage

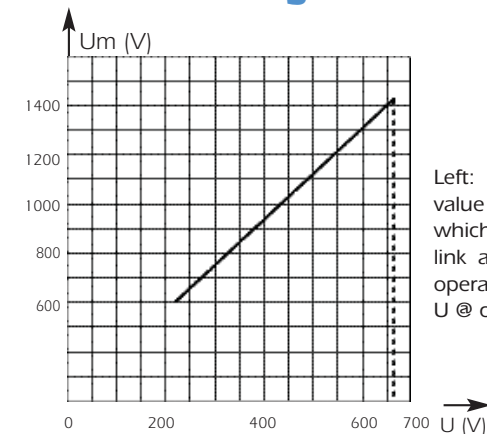


Left: Curve shows peak value U_m of arc voltage which appears across fuse link as a function of the operating voltage U @ $\cos \phi = 0.15$

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 500 to 690 VAC DIN 000

DC Application data

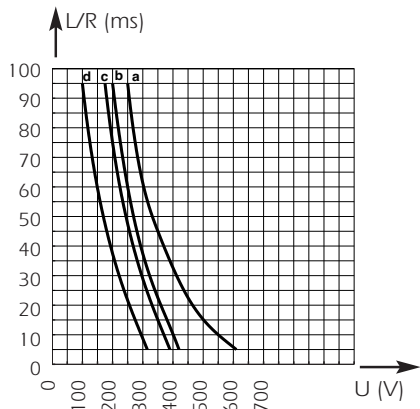


Above: Curves indicate permissible value of time constant L/R as a function of DC working voltage.

Curve a: Ratings from 20 to 160 A

Curve b: Rating 200 A

Curve c: Ratings from 250 to 315 A

Curve d: Ratings from 350 to 400 A

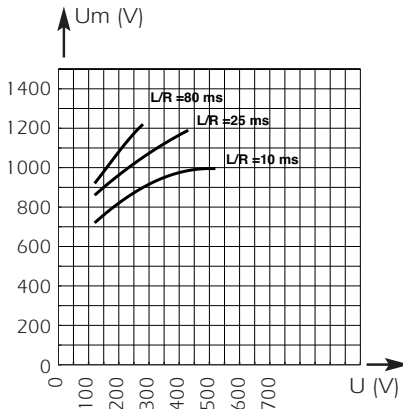


Above: Curves indicates peak arc voltage U_m which may appear across fuse terminals at working voltage U .

Rated current (A)	Curve	I_{pm} (A)
20	a	60
25	a	65
32	a	90
40	a	120
50	a	150
63	a	200
80	a	270
100	a	370
125	a	500
160	a	700
200	b	1200
250	c	1800
315	c	2200
350	d	2600
400	d	3100


I_{pm} values give minimum DC interrupting current in amps.

Current limitation curves

Below: Curves show, for each rating, value of peak let-through current I_c as a function of available fault current I_p .


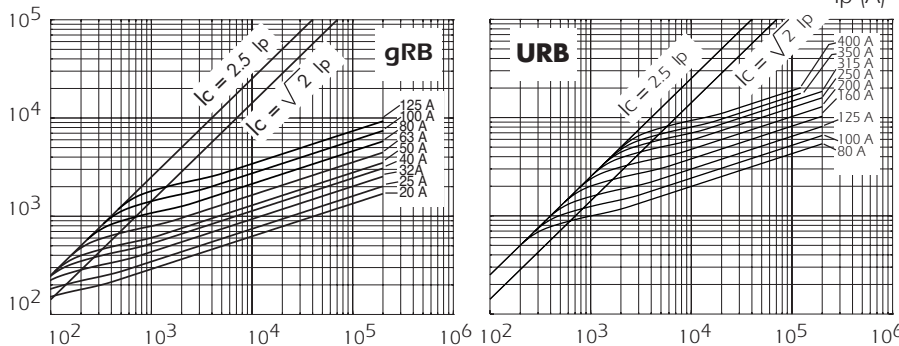


Watts loss

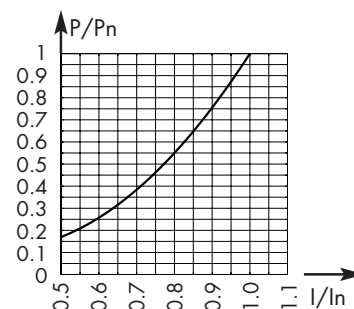

Above: Curve enables computation of power losses P for an IN-rated fuse as a function of R.M.S. current I (as a multiple of I_n for steady state operation)

Time vs current characteristics

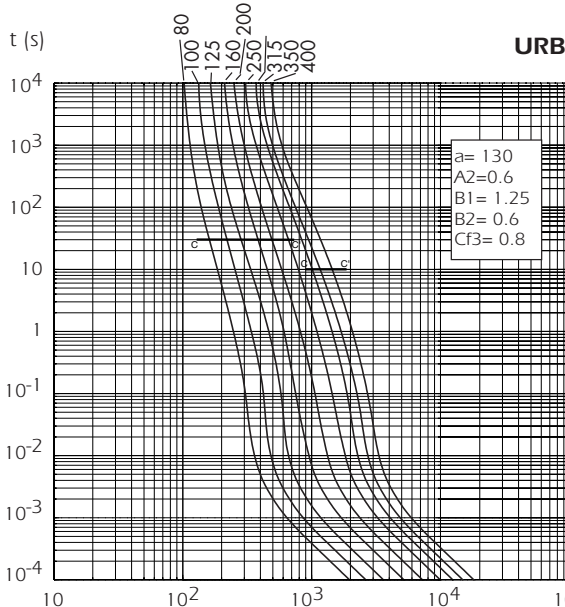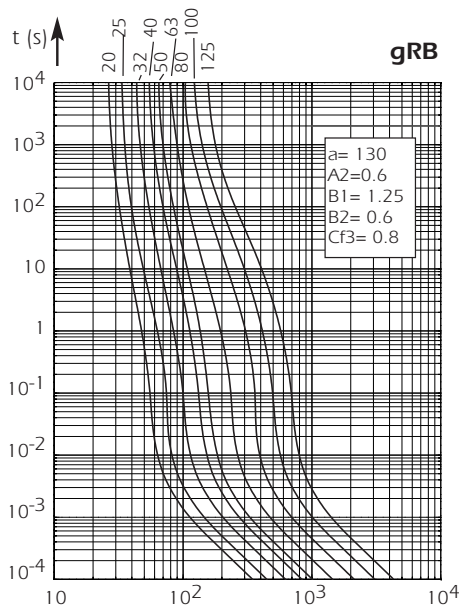

Left: Curves show, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current

Tolerance for mean pre-arcing current $\pm 8\%$.

Semiconductor (AC) fuses



Protistor® Square-body Fuses

PSC gR/aR sizes 000/00

Microswitches for PSC sizes 000/00 and NH Fuses

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses

MS 4L 2-5




Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1




*** Between power circuit and microswitch terminals

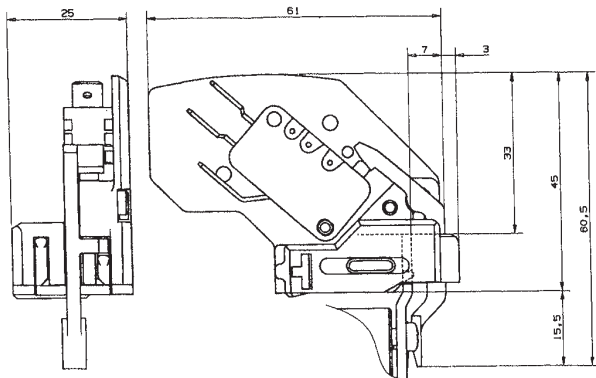

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.

In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

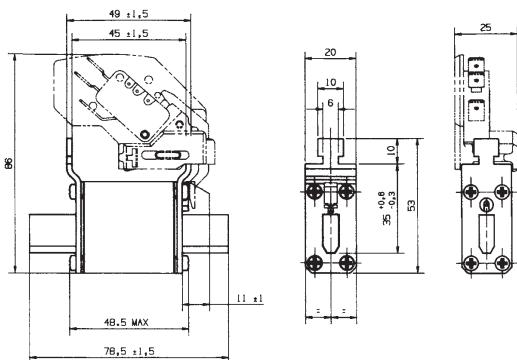

- (1) 6.3 mm clips
- (2) 2.8 mm clips

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 600 to 690 VAC DIN 00

gRB-URB from 16 to 450 A
Size: 00



EXTREMELY HIGH BREAKING CAPACITY FUSES:
PROTECTION OF POWER SEMICONDUCTORS
AS PER IEC STANDARD 60269.1 AND 4

690 V VOLTAGE RATING

gR CLASS (gRB RATINGS 16 to 160 A) AS PER VDE 636-23
- CLEARING ALL OVERLOADS
- IMPROVING SAFETY AND PROTECTION
- ENABLING SELECTIVE COORDINATION WITH ALL FUSES

aR CLASS (URB RATINGS 16 TO 450 A) ACCORDING TO
VDE 636-23 AND IEC 60269-4

CONNECTIONS ACCORDING TO
- DIN 43653/00 80 AND 110 mm BETWEEN AXES
- DIN 43620/00 SOLID BLADES

WITH AN INDICATING PAWL ACTIVATING A MICROSWITCH IF NEEDED



Main Characteristics

Voltage rating U_N (V)	Class	Current rating I_N (A)	Pre-arcing $I't @ 1 ms$ $I'tp$ (A.s)	Total clearing $I't total @ UN$ $I'tt$ (A.s)	Watts loss		Tested Breaking Capacity	Estimated Breaking Capacity
					0.8 I_N	I_N		
690	gRB	16	8	61	2.7	5	200 kA @ 690 V	300 kA @ 690 V
		20	12	86	3.3	6		
		25	18	140	4.4	8		
		32	39	250	6.0	11		
		40	68	450	7.1	13		
		50	116	750	8.8	16		
		63	210	1400	9.9	18		
		80	525	3000	10.5	19		
		100	970	5400	10.7	19.5		
	125	1710	9600	13.2	24			
	160	4270	22400	13.7	25			
	URB	16	7	52	3.8	7	200 kA @ 690 V	300 kA @ 690 V
		20	10	75	5.0	9		
		25	15	120	6.0	11		
		32	32	210	8.2	15		
		40	61	400	9.9	18		
		50	102	700	11.5	21		
		63	177	1200	12.6	23		
		80	390	2200	13.8	25		
100		692	3900	15.4	28			
125		1170	6600	18.1	33			
160	2680	14 000	19.8	36				
200	4690	24 000	23.1	42				
250	8300	42 500	27.5	50				
315	17 520	81 000	31.9	58				
350	25 450	118 000	33.0	60				
400	33 200	150 000	38.5	70				
600	URB	450 **	51 850	196 000	40.7	74	200 kA @ 600 V	300 kA @ 600 V

NOTE: voltage rating of 350-400-450 A rated fuses is defined with a CC' curve at 1 second limited by minimum breaking current.

■ Voltage rating: 690 V with CC' at 1s - 450 V with CC' at 10 s
** Voltage rating: 600 V with CC' at 1s - 450 V with CC' at 10 s


Minimum operating voltage for trip indicator = 20 V

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 600 to 690 VAC DIN 00

German standard as per DIN43653/00C - DIN 80 & 110

gRB - DIN 80

Current rating	Designation	Ref. Number	I _N * fuse base	Catalog Number
16	6,9 gRB 00 D08L 016	S330273	1	DN00GB69V16L
20	6,9 gRB 00 D08L 020	S330227	1	DN00GB69V20L
25	6,9 gRB 00 D08L 025	T330228	1	DN00GB69V25L
32	6,9 gRB 00 D08L 032	V330229	1	DN00GB69V32L
40	6,9 gRB 00 D08L 040	W330230	1	DN00GB69V40L
50	6,9 gRB 00 D08L 050	X330231	1	DN00GB69V50L
63	6,9 gRB 00 D08L 063	Y330232	1	DN00GB69V63L
80	6,9 gRB 00 D08L 080	Z330233	1	DN00GB69V80L
100	6,9 gRB 00 D08L 100	A330234	1	DN00GB69V100L
125	6,9 gRB 00 D08L 125	B330235	0.9	DN00GB69V125L
160	6,9 gRB 00 D08L 160	C330236	0.9	DN00GB69V160L

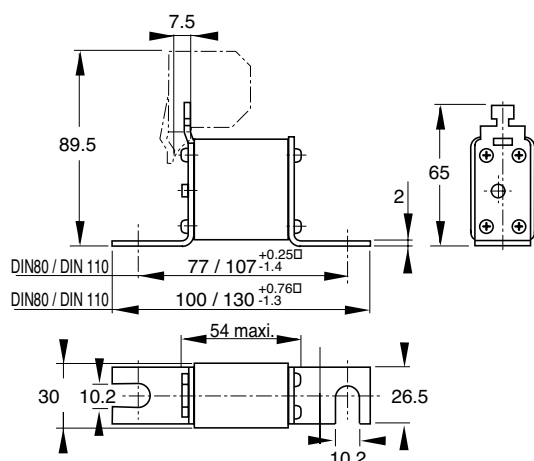

Weight: 140 g(D08) - 190 g(D11)

Packaging: 3 pieces

Microswitches: MC 4L 2.5 B6 + PRES - Ref. Number: F210156

MC 4L 2.5 B2 + PRES - Ref. Number: G210157

Fuse-base: SI 00 DIN 80 - Ref. Number: Q098040

URB - DIN 80

Current rating	Designation	Ref. Number	I _N * fuse base	Catalog Number
16	6,9 URB 00 D08L 016	V330275	1	DN00UB69V16L
20	6,9 URB 00 D08L 020	T330274	1	DN00UB69V20L
25	6,9 URB 00 D08L 025	M330268	1	DN00UB69V25L
32	6,9 URB 00 D08L 032	N330269	1	DN00UB69V32L
40	6,9 URB 00 D08L 040	P330270	1	DN00UB69V40L
50	6,9 URB 00 D08L 050	Q330271	1	DN00UB69V50L
63	6,9 URB 00 D08L 063	R330272	1	DN00UB69V63L
80	6,9 URB 00 D08L 080	D330237	1	DN00UB69V80L
100	6,9 URB 00 D08L 100	E330238	1	DN00UB69V100L
125	6,9 URB 00 D08L 125	F330239	0.9	DN00UB69V125L
160	6,9 URB 00 D08L 160	G330240	0.85	DN00UB69V160L
200	6,9 URB 00 D08L 200	H330241	0.85	DN00UB69V200L
250	6,9 URB 00 D08L 250	J330242	0.80	DN00UB69V250L
315	6,9 URB 00 D08L 315	K330243	0.75	DN00UB69V315L
350	6,9 URB 00 D08L 350	L330244	0.75	DN00UB69V350L
400	6,9 URB 00 D08L 400	M330245	0.70	DN00UB69V400L
450	6 URB 00 D08L 450	N330246	0.65	DN00UB60V450L


gRB - DIN 110

16	6,9 gRB 00 D11L 016	W330276	1	DN00GB69V16D1L
20	6,9 gRB 00 D11L 020	P330247	1	DN00GB69V20D1L
25	6,9 gRB 00 D11L 025	Q330248	1	DN00GB69V25D1L
32	6,9 gRB 00 D11L 032	R330249	1	DN00GB69V32D1L
40	6,9 gRB 00 D11L 040	S330250	1	DN00GB69V40D1L
50	6,9 gRB 00 D11L 050	T330251	1	DN00GB69V50D1L
63	6,9 gRB 00 D11L 063	V330252	1	DN00GB69V63D1L
80	6,9 gRB 00 D11L 080	W330253	1	DN00GB69V80D1L
100	6,9 gRB 00 D11L 100	X330254	1	DN00GB69V100D1L
125	6,9 gRB 00 D11L 125	Y330255	0.9	DN00GB69V125D1L
160	6,9 gRB 00 D11L 160	Z330256	0.9	DN00GB69V160D1L

URB - DIN 110

80	6,9 URB 00 D11L 80	A330257	1	DN00UB69V80D1L
100	6,9 URB 00 D11L 100	B330258	1	DN00UB69V100D1L
125	6,9 URB 00 D11L 125	C330259	0.9	DN00UB69V125D1L
160	6,9 URB 00 D11L 160	D330260	0.85	DN00UB69V160D1L
200	6,9 URB 00 D11L 200	E330261	0.85	DN00UB69V200D1L
250	6,9 URB 00 D11L 250	F330262	0.80	DN00UB69V250D1L
315	6,9 URB 00 D11L 315	G330263	0.75	DN00UB69V315D1L
350	6,9 URB 00 D11L 350	H330264	0.75	DN00UB69V350D1L
400	6,9 URB 00 D11L 400	J330265	0.70	DN00UB69V400D1L
450	6 URB 00 D11L 450	K330266	0.65	DN00UB60V450D1L

German standard as per DIN43620/00

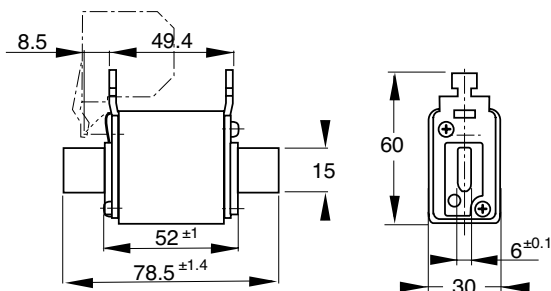

Weight: 210 g

Packaging: 3 pieces

Microswitches: MC 4L 2.5 B2 + PRES - Ref Number: G210157 or

MC 4L 2.5 B6 + PRES - Ref Number: F210156

Fuse-base: 00EP - Ref. Number : F215170

Current rating	Designation	Ref. Number	I _N * fuse base	Catalog Number
16	6,9 gRB 00 PV/016	L330267	1	PC00GB69V16PV
20	6,9 gRB 00 PV/020	W330207	1	PC00GB69V20PV
25	6,9 gRB 00 PV/025	X330208	1	PC00GB69V25PV
32	6,9 gRB 00 PV/032	Y330209	1	PC00GB69V32PV
40	6,9 gRB 00 PV/040	Z330210	1	PC00GB69V40PV
50	6,9 gRB 00 PV/050	A330211	1	PC00GB69V50PV
63	6,9 gRB 00 PV/063	B330212	0.90	PC00GB69V63PV
80	6,9 gRB 00 PV/080	C330213	0.90	PC00GB69V80PV
100	6,9 gRB 00 PV/100	D330214	0.90	PC00GB69V100PV
125	6,9 gRB 00 PV/125	E330215	0.85	PC00GB69V125PV
160	6,9 gRB 00 PV/160	F330216	0.85	PC00GB69V160PV

For curves see pages



I_N : Ratio RMS steady current / current rating for fuses in base.

Semiconductor (AC) fuses




Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 600 to 690 VAC DIN 00

Total clearing I²t

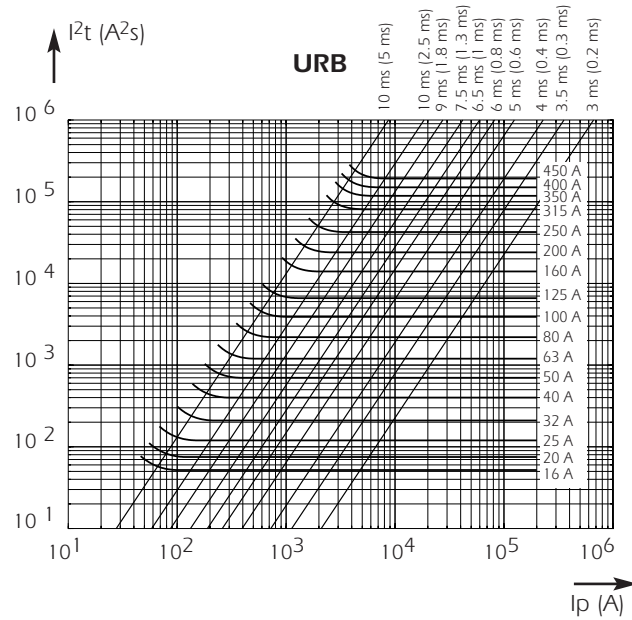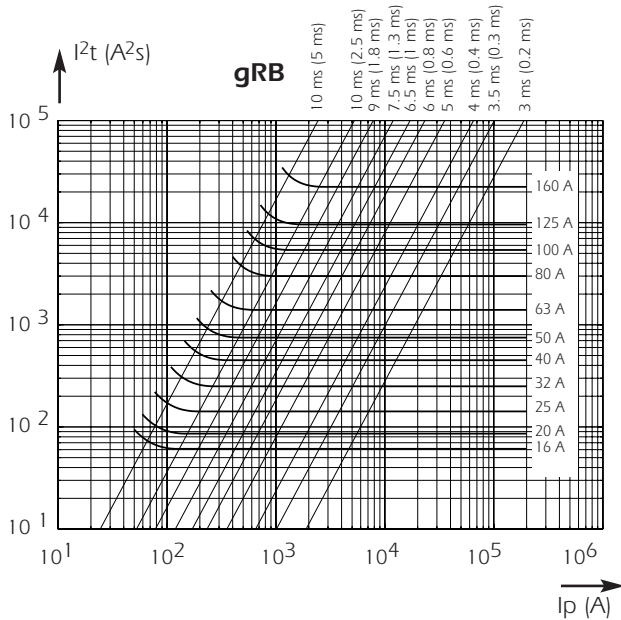


Above: horizontal curves show, for each rated current, maximum values of total clearing I²t (I²t_t) as a function of prospective current I_p. @ UN with cos φ = 0.15.
Oblique lines indicate total clearing duration T_t, with associated pre-arcing duration shown in brackets.

I²t corrective factor

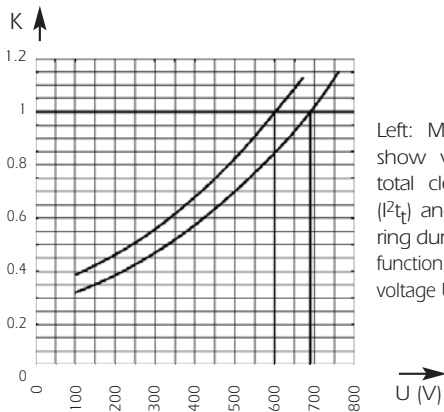


Left: Mean curves show variation of total clearing time (I²t_t) and total clearing duration T_t as a function of operating voltage U.

Peak arc voltage

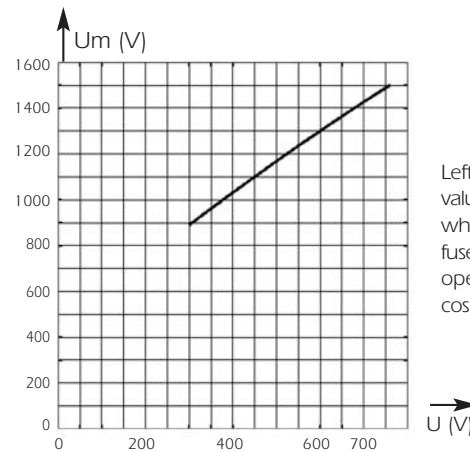

Left: Curve shows peak value U_m of the arc voltage which appears across fuse-link as a function of operating voltage U @ cos φ = 0.15

Watts loss

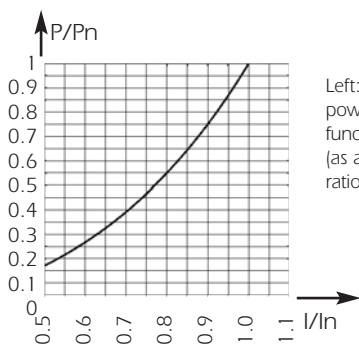


Left: Curve enables computation of power losses P for a I_N-rated fuse as a function of R.M.S. current I (as a multiple of I_N for steady state operation)


Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 gR/aR - 600 to 690 VAC DIN 00

DC Application data


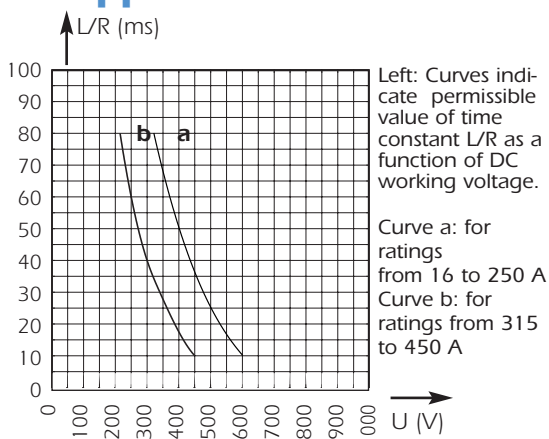


Rated current	Curve	I _{pm} (A) gRB	I _{pm} (A) URB
16	a	32	32
20	a	40	40
25	a	50	50
32	a	64	64
40	a	80	80
50	a	100	100
63	a	126	126
80	a	160	170
100	a	200	220
125	a	250	280
160	a	320	390
200	a	510	510
250	a	650	650
315	b	840	840
350	b	1770	1770
400	b	2040	2040
450	b	2250	2250

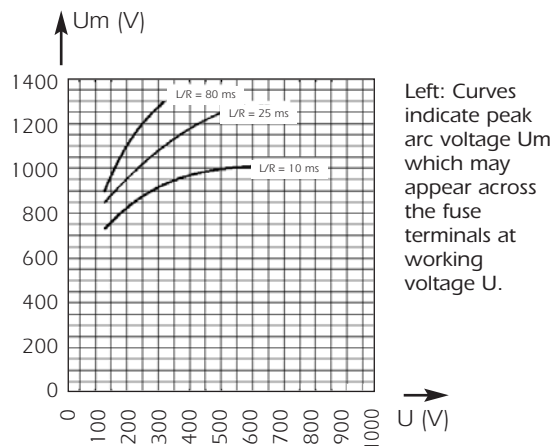



Current limitation curves

I_{pm} values give minimum DC interrupting current in amps.

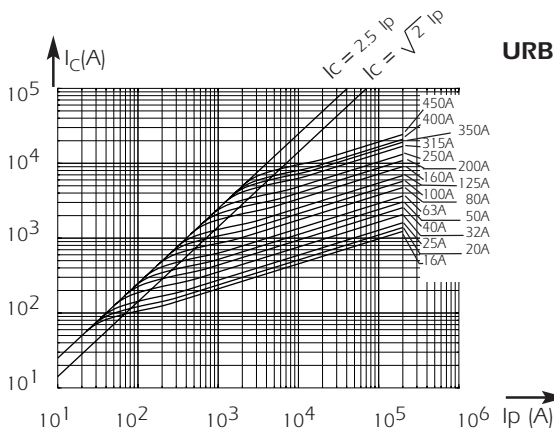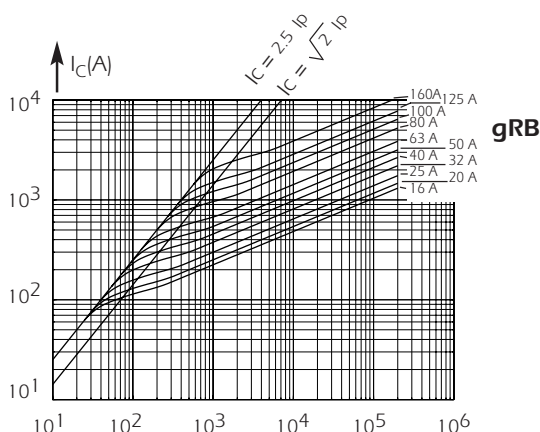

Above: Curves show, for each rating, value of peak let-through current I_c as a function of available fault current I_p .

Time vs current characteristics

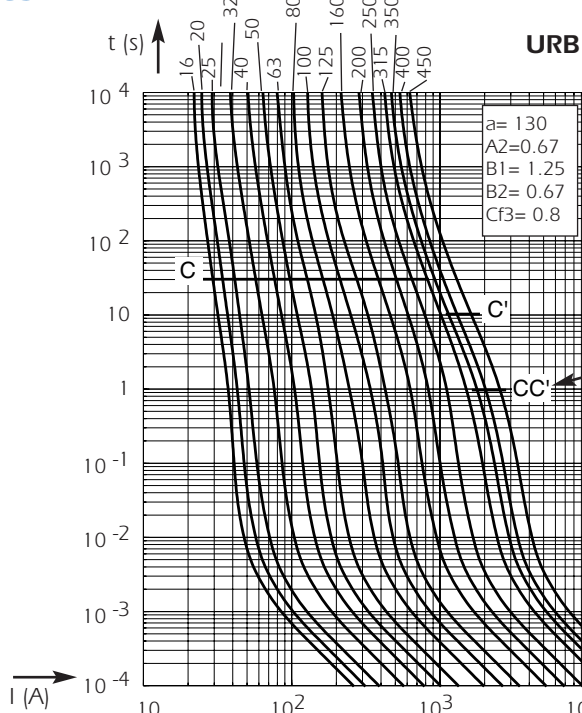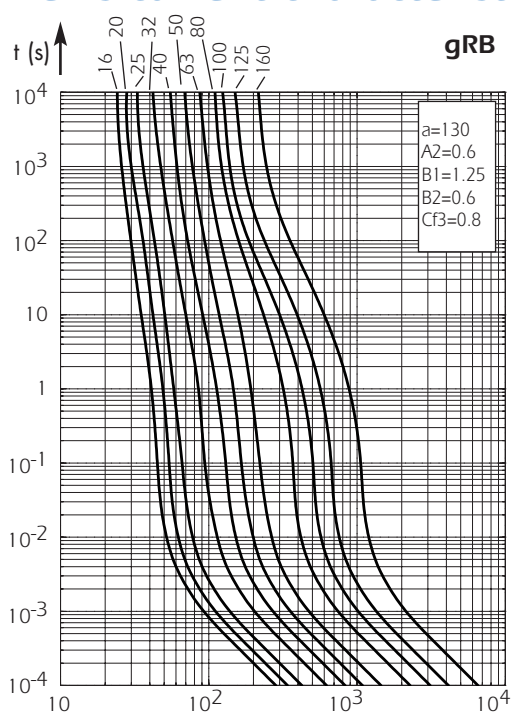

Semiconductor (AC) fuses



Protistor® Square-body Fuses

PSC gR/aR sizes 000/00

Microswitches for PSC sizes 000/00 and NH Fuses

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses

MS 4L 2-5




Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1




*** Between power circuit and microswitch terminals

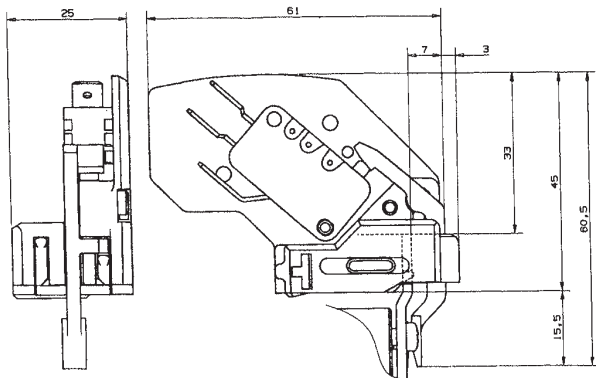

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.

In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

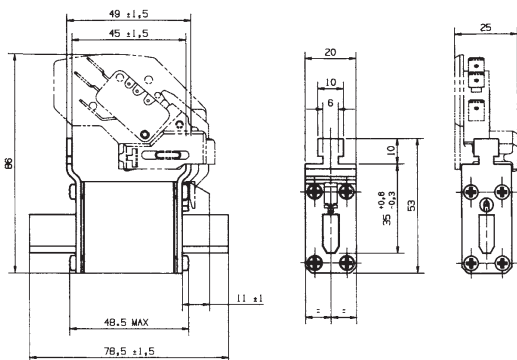

- (1) 6.3 mm clips
- (2) 2.8 mm clips

Semiconductor (AC) fuses



Protistor® Square-body Fuses

PSC gR/aR sizes 000/00

Microswitches for PSC sizes 000/00 and NH Fuses

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses

MS 4L 2-5




Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1




*** Between power circuit and microswitch terminals

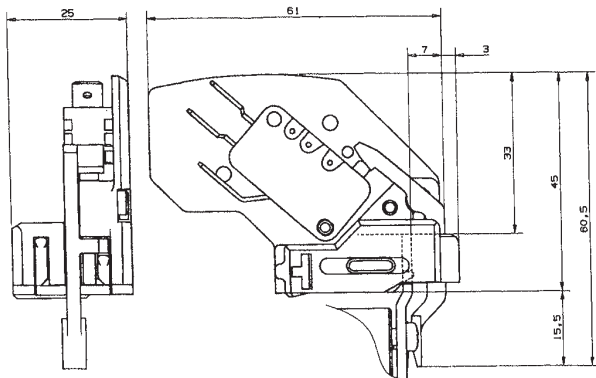

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.

In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

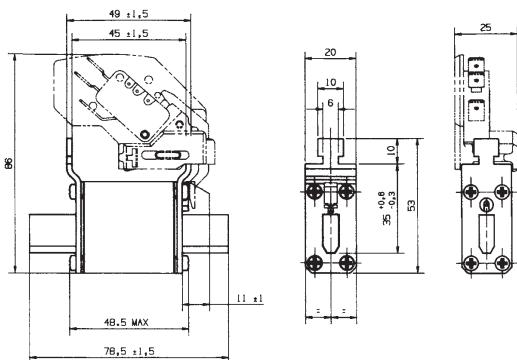


- (1) 6.3 mm clips
- (2) 2.8 mm clips

Protistor® Square-body Fuses PSC gGR sizes 000/00 gGR - 690 VAC DIN 00/000 (full range)



F : Réf. D302108
MC: Réf. F210156C

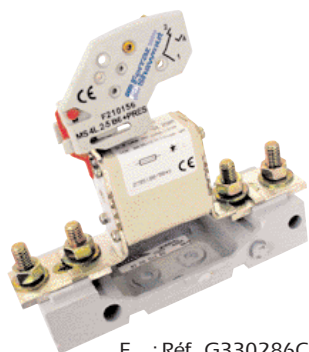

F : Réf. G330286C
PF : Réf. Q098040C
MC: Réf. F210156C

gGr: two functions

A combination of: Power supply cable protection (gG curve)

- Compliance with the standardized gate values for gG curves as per EN 60269-2,
- Low power dissipation, similar to a gG fuse, no current derating in holders,
- No derating for variable currents,
- Good withstand to overloads,
- Same thermal definition as a gG curve,
- Unnecessary to dimension the cable cross sectional area large in comparison to UR protection,
- Range designed for the new voltage of 690V \pm 10%.

Power semi-conductor protection (Fast R curve)

- Fast curve for fault currents and short-circuit currents under 20 In,
- Tested breaking capacity 100 kA (00) or 170 kA (000) at 690 V,
- Very current limiting, which in turn limits electrodynamic forces in the circuit downstream,
- Low I²t
- Compact footprint: only one fuse instead of two or a relay plus a fuse,
- DC performances 360 to 550V for I/R = 10 ms,
Semi-conductor protection checked in the same way as a fuse.

Applications: "off-board" protection

- AC and DC speed governor,
- Soft starter,
- Static relay,
- Current regulator,
- Inverter (IGBT module disconnecter in parallel),
Battery.

Connection technologies offered

- Solid blades (as per DIN 43620) with visual blown fuse indicator and striker to actuate a microswitch, MS4L2-5B + PRES (ref. F210156C or G210157C),
- DIN 80 brackets (as per DIN 43653) with visual blown fuse indicator and striker indicator to actuate a microswitch, MS4L2-5B + PRES.
- With these two technologies the designer can choose a fuse according to the types of holders desired.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC gGR sizes 000/00 gGR - 690 VAC DIN 00/000 (full range)

- EN 60269-2-1 compliant
- Compliance with gG gate values on melting and not melting
- Low dissipated power
- No derating for variable current
- Good withstand to repeated overloading
- Withstand to exceptional overloads (same as Protistor fuses)
- Cable protection



Functionalities

Two functions:

- to protect cables from overloads,
- to protect semi-conductors from short-circuits.

Electrical characteristics

Size 000

Voltage Rating (VAC)	Size	Current Rating In (A)	Prearcing Pt @ 1 ms Ptp (A²s)	Total Pt (A²s)		Power losses @ In (W)	Tested breaking capacity	Estimated breaking capacity
				@ Un	@ 400V			
690	000	16	45	280	230	2.5		
		20	60	380	310	3		
		25	130	830	700	3.5		
		32	210	1350	1150	4	170 kA	200 kA
		40	350	2200	1900	5	@	@
		50	550	3500	3000	6	690 V	690 V
		63	1000	6100	5150	7		
		80	1700	11000	9200	8		
		100	3900	25000	21000	9		

Size 00


Voltage Rating (VAC)	Size	Current Rating In (A)	Prearcing Pt @ 1 ms Ptp (A²s)	Total Pt (A²s)		Power losses @ In (W)	Tested breaking capacity	Estimated breaking capacity
				@ Un	@ 400V			
690	00	16	45	280	230	2.5		
		20	60	390	290	3.2		
		25	120	750	560	4		
		32	240	1550	1150	5		
		40	350	2250	1680	5.5		
		50	540	3500	2600	6.5	100 kA	200 kA
		63	1060	6750	5000	7.6	@	@
		80	1900	12100	9000	9.5	690 V	690 V
		100	3900	24150	18000	11		
		125	6950	45000	33500	13		
		160	13500	82000	61000	16		
		200	27600	160000	120000	18		

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC gGR sizes 000/00 gGR - 690 VAC DIN 00/000 (full range)

Size 000

German standard
DIN 43653/000
DIN 80




German blade-style
fuse standard
DIN 43620/000




Size 00

German standard
43653/00 - DIN 80



German blade-style
fuse standard 43620/00

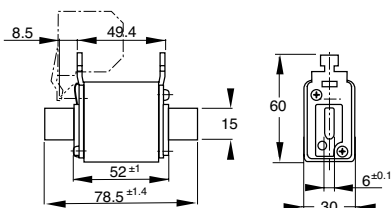

No derating:

I/In = I rms of use/fuse rating
In the different holders = no derating

Microswitches:

Ref. F210156: 6.3 mm clips
Ref. G210156: 2.8 mm clips

690 V gGR fuse holders and supports

Current [A]	Designation	Ref. Number	I/In*	Weight [g]	Pack.	Catalog Number
16	6,9 gGR 000 D08L 016	H302112	1	120	3	DN000GR69V16L
20	6,9 gGR 000 D08L 020	J302113	1	120	3	DN000GR69V20L
25	6,9 gGR 000 D08L 025	K302114	1	120	3	DN000GR69V25L
32	6,9 gGR 000 D08L 032	L302115	1	120	3	DN000GR69V32L
40	6,9 gGR 000 D08L 040	M302116	1	120	3	DN000GR69V40L
50	6,9 gGR 000 D08L 050	N302117	1	120	3	DN000GR69V50L
63	6,9 gGR 000 D08L 063	P302118	1	120	3	DN000GR69V63L
80	6,9 gGR 000 D08L 080	Q302119	1	120	3	DN000GR69V80L
100	6,9 gGR 000 D08L 100	R302120	1	120	3	DN000GR69V100L
Microswitch		F210156				MS4L2-5B6PRES
		G210157				MS4L2-5B2PRES
16	6,9 gGR 000 PV 016	X302102	1	150	3	NH000GR69V16PV
20	6,9 gGR 000 PV 020	Y302103	1	150	3	NH000GR69V20PV
25	6,9 gGR 000 PV 025	Z302104	1	150	3	NH000GR69V25PV
32	6,9 gGR 000 PV 032	A302105	1	150	3	NH000GR69V32PV
40	6,9 gGR 000 PV 040	B302106	1	150	3	NH000GR69V40PV
50	6,9 gGR 000 PV 050	C302107	1	150	3	NH000GR69V50PV
63	6,9 gGR 000 PV 063	D302108	1	150	3	NH000GR69V63PV
80	6,9 gGR 000 PV 080	E302109	1	150	3	NH000GR69V80PV
100	6,9 gGR 000 PV 100	F302110	1	150	3	NH000GR69V100PV
Microswitch		F210156				MS4L2-5B6PRES
		G210157				MS4L2-5B2PRES
Extractor handle		P215592			1	NH HANDLE
20	6,9 gGR 00 D08L 020	T330297	1	140	3	DN00GR69V20L
25	6,9 gGR 00 D08L 025	V330298	1	140	3	DN00GR69V25L
32	6,9 gGR 00 D08L 032	W330299	1	140	3	DN00GR69V32L
40	6,9 gGR 00 D08L 040	X330300	1	140	3	DN00GR69V40L
50	6,9 gGR 00 D08L 050	Y330301	1	140	3	DN00GR69V50L
63	6,9 gGR 00 D08L 063	G330286	1	140	3	DN00GR69V63L
80	6,9 gGR 00 D08L 080	H330287	1	140	3	DN00GR69V80L
100	6,9 gGR 00 D08L 100	J330288	1	140	3	DN00GR69V100L
125	6,9 gGR 00 D08L 125	K330289	1	140	3	DN00GR69V125L
160	6,9 gGR 00 D08L 160	L330290	1	140	3	DN00GR69V160L
200	6,9 gGR 00 D08L 200	M330291	1	140	3	DN00GR69V200L
Microswitch		F210156				MS4L2-5B6PRES
		G210157				MS4L2-5B2PRES
20	6,9 gGR 00 PV 020	N330292	1	210	3	NH00GR69V20PV
25	6,9 gGR 00 PV 025	P330293	1	210	3	NH00GR69V25PV
32	6,9 gGR 00 PV 032	Q330294	1	210	3	NH00GR69V32PV
40	6,9 gGR 00 PV 040	R330295	1	210	3	NH00GR69V40PV
50	6,9 gGR 00 PV 050	S330296	1	210	3	NH00GR69V50PV
63	6,9 gGR 00 PV 063	A330280	1	210	3	NH00GR69V63PV
80	6,9 gGR 00 PV 080	B330281	1	210	3	NH00GR69V80PV
100	6,9 gGR 00 PV 100	C330282	1	210	3	NH00GR69V100PV
125	6,9 gGR 00 PV 125	D330283	1	210	3	NH00GR69V125PV
160	6,9 gGR 00 PV 160	E330284	1	210	3	NH00GR69V160PV
200	6,9 gGR 00 PV 200	F330285	1	210	3	NH00GR69V200PV
Microswitch		F210156 (only)				MS4L2-5B6PRES
Extractor handle		P215592			1	NH HANDLE


Type of fuse	Nb. poles	References for mounting on 35 mm DIN rail	References for panel mounting
Solid blades size 000/00 IPXX	1	R216192	F215170
	2	F218758	A217212
	3	V219277	F217723
	4	Z223007	S219275
Solid blades size 000/00 IP20 w/o microswitch	1	S218240	-
	3	S229119	-
DIN 80 bracket size 000 IPXX	1	-	C220710
DIN 80 bracket size 00 IPXX	1	-	O098040
DIN 80 blades size 000 IP20 w/o microswitch	1	B227218	-
DIN 80 blades size 000 IP20 for microswitch	1	C227219	-
DIN 80 blades size 00 IP20 w/o microswitch	1	V227672	-
DIN 80 blades size 00 IP20 for microswitch	1	W227673	-
ITCP range	1		



Protistor® Square-body Fuses PSC gGR sizes 000/00 gGR - 690 VAC DIN 00/000 (full range)



F : Réf. D302108C
MC: Réf. F210156C

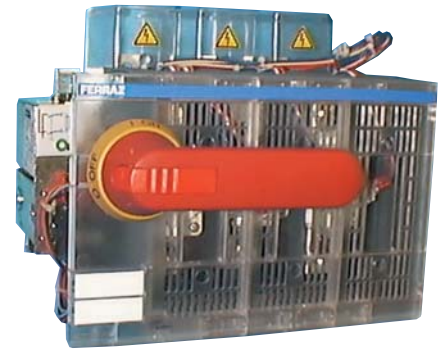

F : Réf. G330286C
PF : Réf. Q098040C
MC: Réf. F210156C

ITCP: Réf. G210410A
F : Réf. M330291C

Choice and references of gGR fuse holders

	Type of support	Characteristics	Nb. Poles	Solid blade size 000/00		DIN 80 bracket		Fuse microswitch (2)
				Reference Number	Fuse extraction handle	Size 000	Size 00	
CEI 60269-2	Fuse holders	No protection (1) Screw connection for eye lug or bar for 35 mm DIN rail	1	R216192	P215592			F2101546 or G210157
			2	F218758				
			3	V219277				
			4	Z223007				
		No protection (1) Screw connection for eye lug or bar on panels	1	F215170	P215592	C220710	Q098040	F210156 or G210157
			2	A217212				
		Protect led to IP20 Screw connection for eye lug or bar for DIN rail	3	S218240	P215592	W/o microswitch B227218 C227219		
			1	S229119		For microswitch V227672 W227673		
CEI 60947-3	Switch disconnecter	Horizontal Linocur AC23	2	N216626 N222882 B218685 C201781 Y212035 W213574	P215592			F210156 or G210157
			3		P215592			
			3		P215592			
	Switch with front control handle	ITC 160M III 00 Front handle Inside/outside Complete	3	K227824	P215592			
			3	F210409	P215592			
Switch with side control handle	ITC 160M III 00 Side handle Outside Complete	3	J227823	P215592				
ITCP	ITCP	3		P215592				G210410



(1) No protection against accidental contact with live parts IPXX.

(2) F210156C microswitch: 6.3 mm clips
G210157C microswitch: 2.8 mm clips

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC gGR sizes 000/00 gGR - 690 VAC DIN 00/000 (full range)

Amplitude of current interrupted

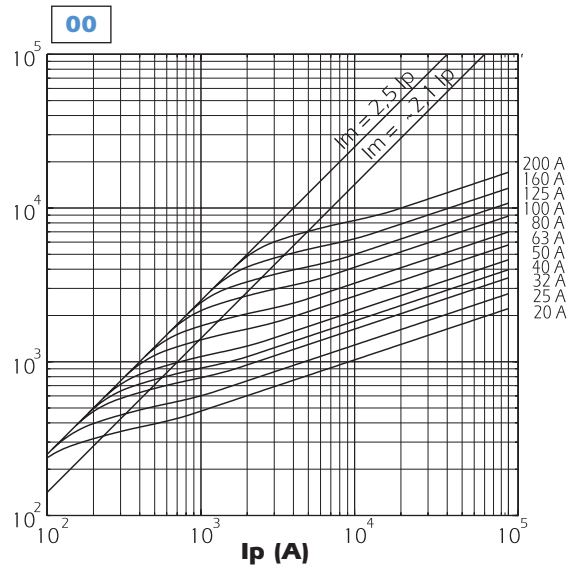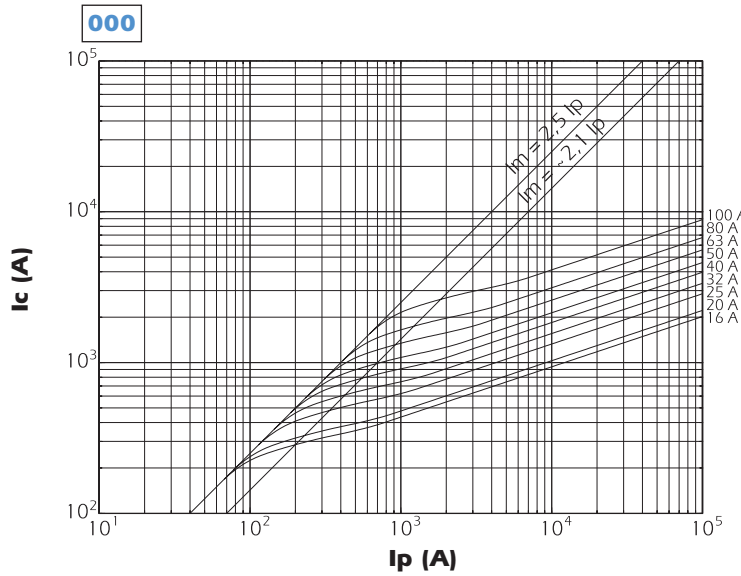


DC working voltage possibilities


Size 00

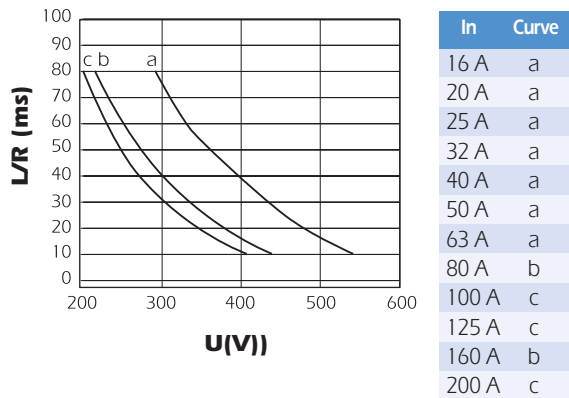

Size 000

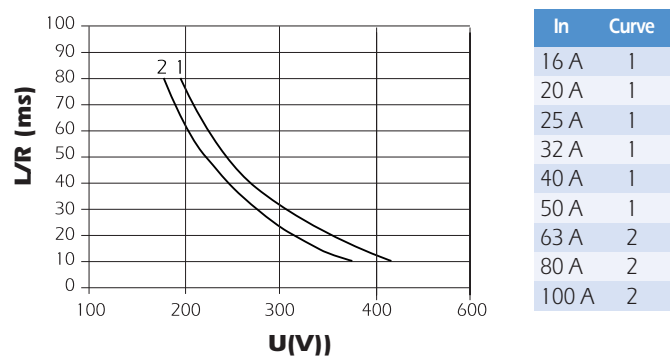

Size 00 and Size 000

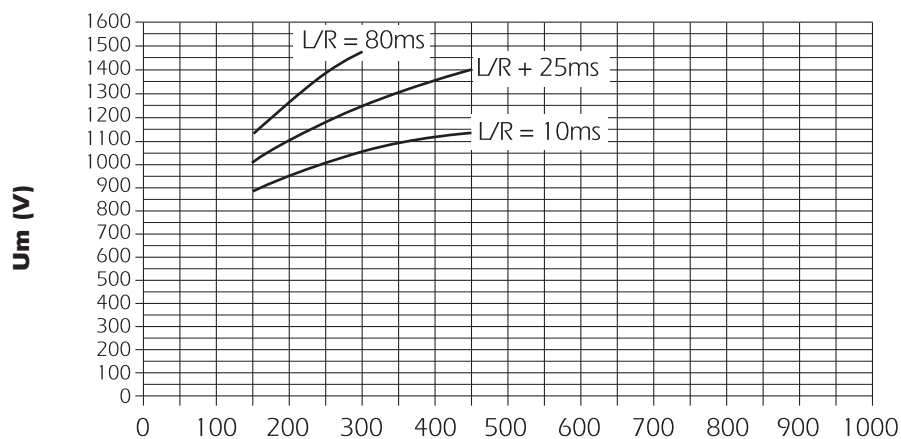

Semiconductor (AC) fuses





Protistor® Square-body Fuses

PSC gGR sizes 000/00



gGR - 690 VAC DIN 00/000 (full range)

Time/current characteristics


TOLERANCE ON PRE-ARCING CURRENT +/- 8%

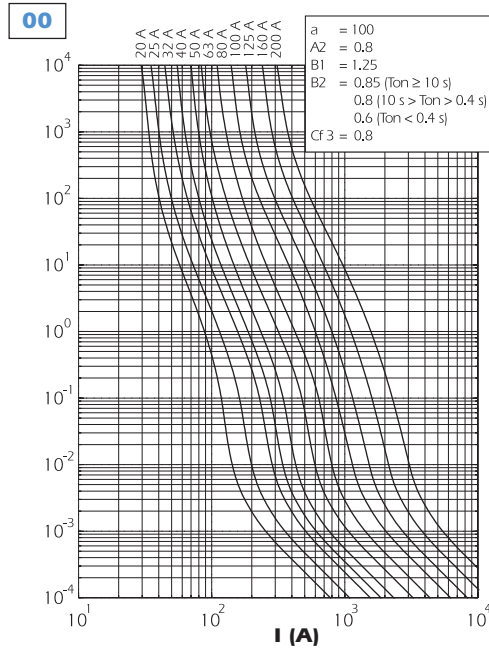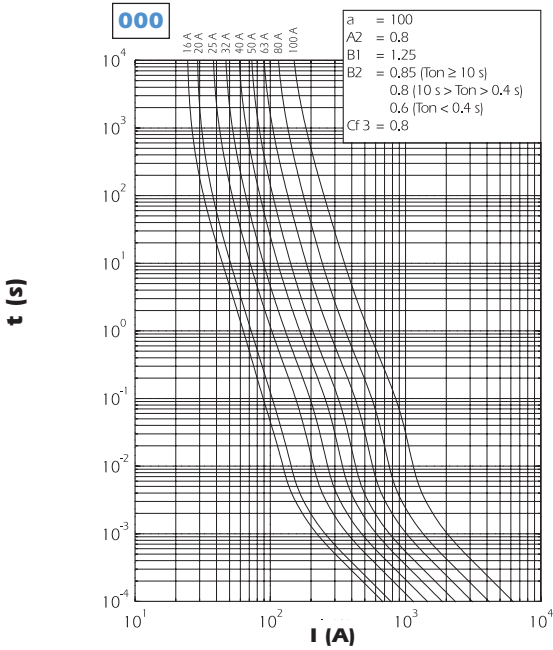



Dissipated power

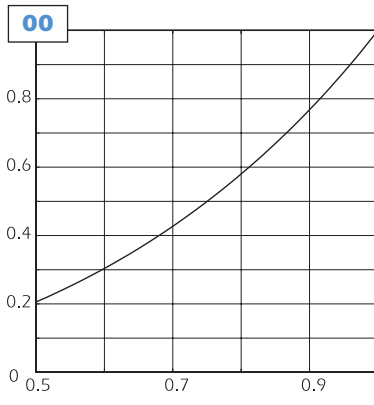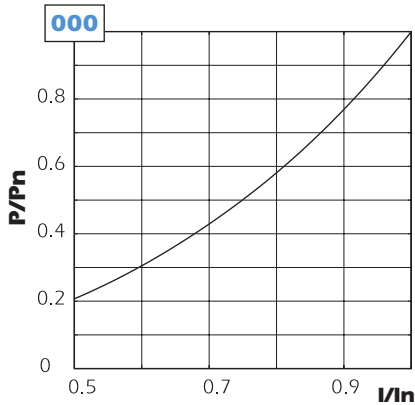

Breaking voltage

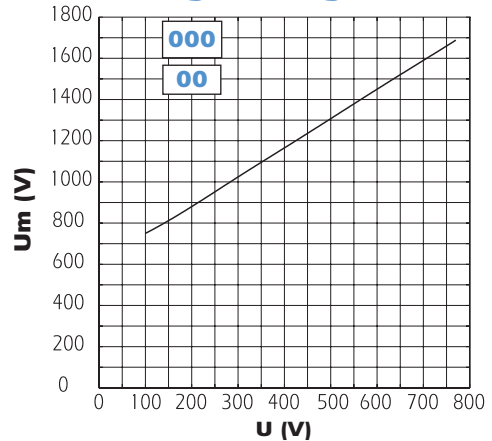

Maximum total operating I²t and total operating time

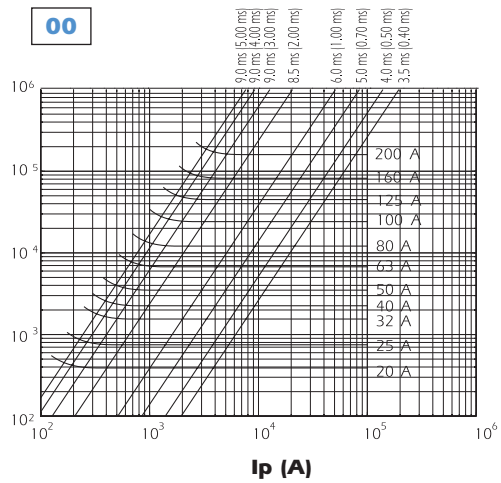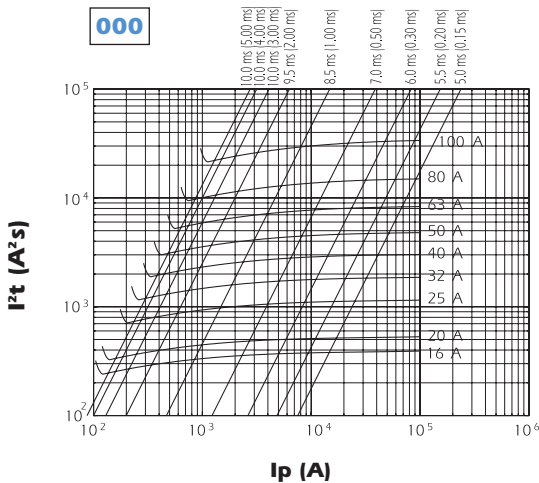

Protistor® Square-body Fuses PSC gR/aR sizes 000/00 Microswitches for PSC sizes 000/00 and NH

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses


MS 4L 2-5



Main Characteristics



Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 μs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz	4A	4A	5A	-	5A	5 A	12 kV 8 kV	16 kV 13 kV	V0
				DC	-	-	-	-	2 A	0,4 A			
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8 kV	10 kV	V0
				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)
 ** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1
 *** Between power circuit and microswitch terminals

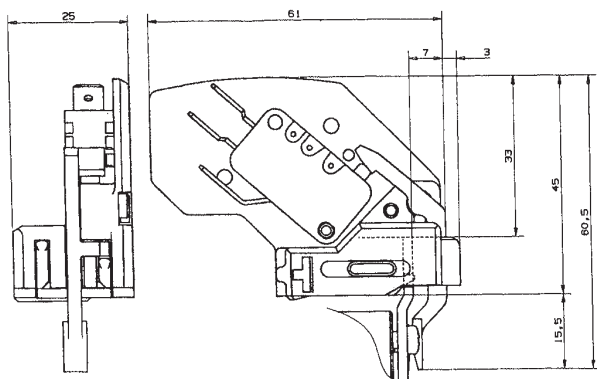

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.
 In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

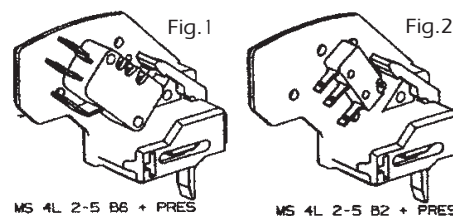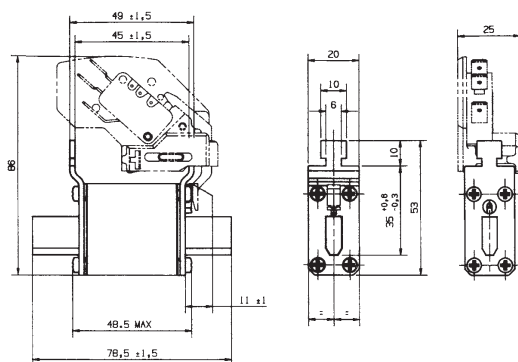

(1) 6.3 mm clips
 (2) 2.8 mm clips



Protistor® Square-body Fuses PSC gR/aR sizes 000/00 Microswitches for PSC sizes 000/00 for NH

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses




Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 μs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1




*** Between power circuit and microswitch terminals

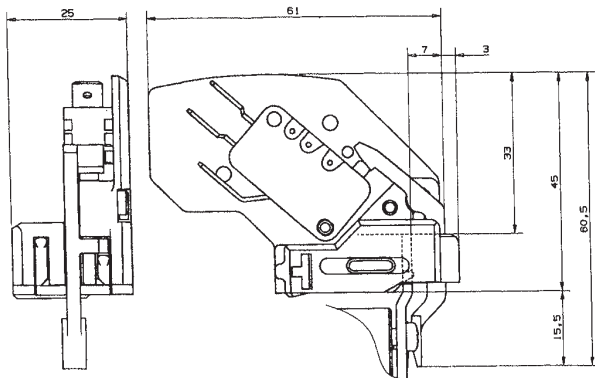

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.

In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

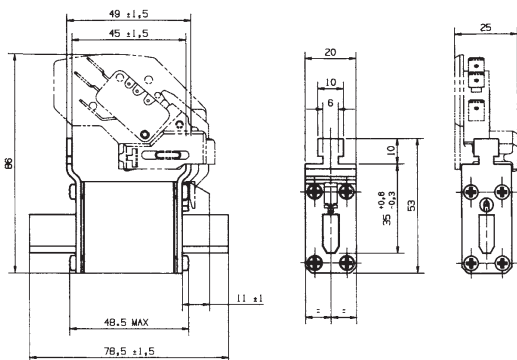

- (1) 6.3 mm clips
- (2) 2.8 mm clips

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA

Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
1100	270	1450(*)	140	165					
1250	410	1950(*)	150	180					
1400	555	2300(*)	160	200					
1600	870	3600(*)	165	205					
1800	1050	3700(*)	195	230					
32	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
33	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
			2000	950	5000	235	235		
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
			1800	530	2800	250	250		
			2000	700	3100(*)	280	280		
2200	950	4400(*)	280	280					
2500	1400	6600(*)	310	310					
2800	1900	8800(*)	330	330					
2X32	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
2x33	690	700	2000	950	5000	235	235	170	170
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
2x33	600	650	2000	700	3100(*)	280	280	160(*)	160(*)
			2200	950	4400(*)	280	280		
			2500	1400	6600(*)	310	310		
			2800	1900	8800(*)	330	330		

For others Ampere ratings consult us
12/04

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA

Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
1100	270	1450(*)	140	165					
1250	410	1950(*)	150	180					
1400	555	2300(*)	160	200					
1600	870	3600(*)	165	205					
1800	1050	3700(*)	195	230					
32	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
33	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
			2000	950	5000	235	235		
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
			1800	530	2800	250	250		
			2000	700	3100(*)	280	280		
2200	950	4400(*)	280	280					
2500	1400	6600(*)	310	310					
2800	1900	8800(*)	330	330					
2X32	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
2x33	690	700	2000	950	5000	235	235	170	170
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
2x33	600	650	2000	700	3100(*)	280	280	160(*)	160(*)
			2200	950	4400(*)	280	280		
			2500	1400	6600(*)	310	310		
			2800	1900	8800(*)	330	330		

For others Ampere ratings consult us
12/04

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 End contacts



Size	Designation			Reference Number	Weight (g)	Packaging	Catalog Number
30	A070 URD	30	TTI 0050	V302744	245	3	A070UD30TTI 50
	A070 URD	30	TTI 0063	A301967			A070UD30TTI 63
	A070 URD	30	TTI 0080	V301962			A070UD30TTI 80
	A070 URD	30	TTI 0100	W300744			A070UD30TTI100
	A070 URD	30	TTI 0125	G300708			A070UD30TTI125
	A070 URD	30	TTI 0160	N300576			A070UD30TTI160
	A070 URD	30	TTI 0200	P300577			A070UD30TTI200
	A070 URD	30	TTI 0250	Q300578			A070UD30TTI250
	A070 URD	30	TTI 0315	R300579			A070UD30TTI315
	A070 URD	30	TTI 0350	S300580			A070UD30TTI350
	A070 URD	30	TTI 0400	T300581			A070UD30TTI400
	A070 URD	30	TTI 0450	V300582			A070UD30TTI450
	A070 URD	30	TTI 0500	W300583			A070UD30TTI500
	A070 URD	30	TTI 0550	X300584			A070UD30TTI550
	A065 URD	30	TTI 0630	A302703			A065UD30TTI630
31	A070 URD	31	TTI 0160	-	370	3	A070UD31TTI200
	A070 URD	31	TTI 0200	A300472			A070UD31TTI250
	A070 URD	31	TTI 0250	B300473			A070UD31TTI315
	A070 URD	31	TTI 0315	C300474			A070UD31TTI350
	A070 URD	31	TTI 0350	D300475			A070UD31TTI400
	A070 URD	31	TTI 0400	E300476			A070UD31TTI450
	A070 URD	31	TTI 0450	F300477			A070UD31TTI500
	A070 URD	31	TTI 0500	G300478			A070UD31TTI550
	A070 URD	31	TTI 0550	H300479			A070UD31TTI630
	A070 URD	31	TTI 0630	J300480			A070UD31TTI700
	A070 URD	31	TTI 0700	K300481			A070UD31TTI800
A070 URD	31	TTI 0800	L300482				
32	A070 URD	32	TTI 0315	-	510	3	A070UD32TTI400
	A070 URD	32	TTI 0350	-			A070UD32TTI450
	A070 URD	32	TTI 0400	Q300463			A070UD32TTI500
	A070 URD	32	TTI 0450	N300461			A070UD32TTI550
	A070 URD	32	TTI 0500	P300462			A070UD32TTI630
	A070 URD	32	TTI 0550	R300464			A070UD32TTI700
	A070 URD	32	TTI 0630	S300465			A070UD32TTI800
	A070 URD	32	TTI 0700	T300466			A070UD32TTI900
	A070 URD	32	TTI 0800	V300467			A070UD32TTI1000
	A070 URD	32	TTI 0900**	W300468			A065UD32TTI100
	A070 URD	32	TTI 1000**	X300469			A060UD32TTI1250
	A065 URD	32	TTI 1100**	M301081			A055UD32TTI1400
	A060 URD	32	TTI 1250**	N301082			A055UD32TTI1600
	A055 URD	32	TTI 1400**	P301083			A050UD32TTI1800
A055 URD	32	TTI 1600**	Q301084				
A050 URD	32	TTI 1800**	R301085				
33	A070 URD	33	TTI 0450	X302171	790	3	A070UD33TTI450
	A070 URD	33	TTI 0500	X300446			A070UD33TTI500
	A070 URD	33	TTI 0550	Y300447			A070UD33TTI550
	A070 URD	33	TTI 0630	Z300448			A070UD33TTI630
	A070 URD	33	TTI 0700	A300449			A070UD33TTI700
	A070 URD	33	TTI 0800	T300443			A070UD33TTI800
	A070 URD	33	TTI 0900	B300450			A070UD33TTI900
	A070 URD	33	TTI 1000	C300451			A070UD33TTI1000
	A070 URD	33	TTI 1100	D300452			A070UD33TTI1100
	A070 URD	33	TTI 1250**	E300453			A070UD33TTI1250
	A070 URD	33	TTI 1400**	F300454			A070UD33TTI1400
	A065 URD	33	TTI 1500**	F302064			A065UD33TTI1500
	A065 URD	33	TTI 1600**	S301086			A065UD33TTI1600
	A065 URD	33	TTI 1800**	T301087			A065UD33TTI1800
	A060 URD	33	TTI 2000**	V301088			A060UD33TTI2000
	A055 URD	33	TTI 2250**	W301089			A055UD33TTI2250
	A050 URD	33	TTI 2500**	Y300838			A050UD33TTI2500


Rated Voltage as per American standard



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 End contacts

Size	A	B	C	D	E ^{±1}	d	G ^{±0.1}	P ^{±0.1}
30	40 1-19/32"	46.5 1-27/32"	82 3-7/32"	26 1"	50.6 2"	5/16"-18	9 23/64"	6 15/64"
31	51 2"	56.5 2-7/32"	91 3-37/64"	30 1-3/16"	50.6 2"	5/16"-18	9 23/64"	9 23/64"
32	60 2-3/8"	65.5 2-37/64"	100 3-15/16"	38 ; (42 **) 1-1/2" ; (1-21/32" **)	50.6 2"	3/8"-16	15 19/32"	9 23/64"
33	74.5 2-15/16"	79.5 3-1/8"	114 4-1/2"	46 ; (52 **) 1-13/16" ; (2-1/16" **)	50.6 2"	1/2"-13	15 19/32"	9 23/64"

Note:
dimensions in mm
dimensions in inches

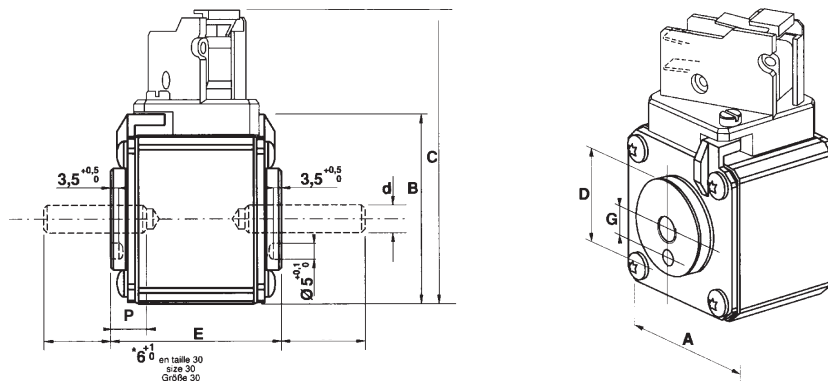

Microswitches are supplied separately see microswitches PSC 3x & 7x section




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

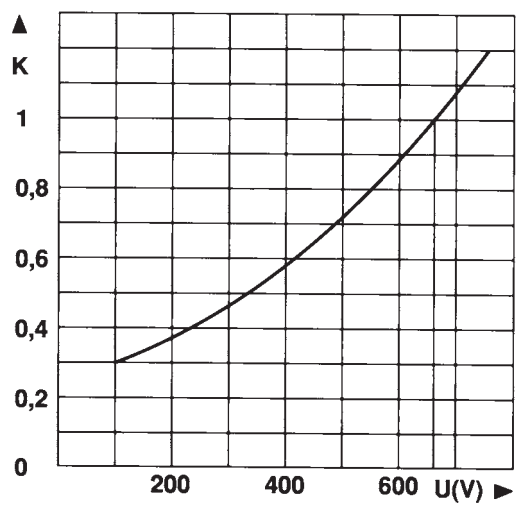

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

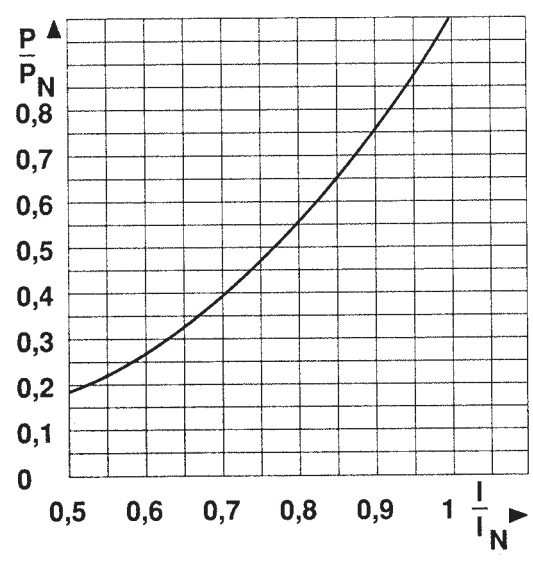

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

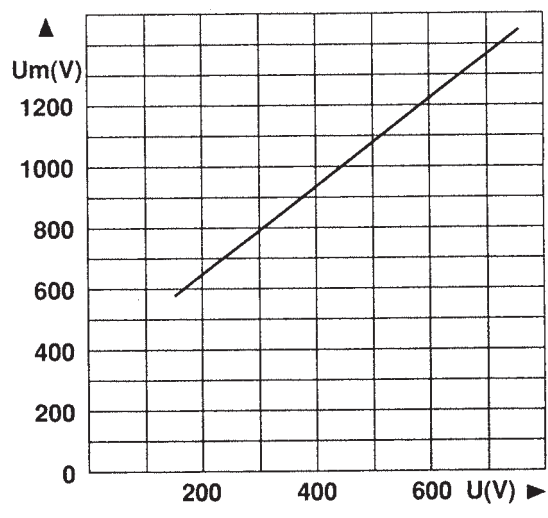


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

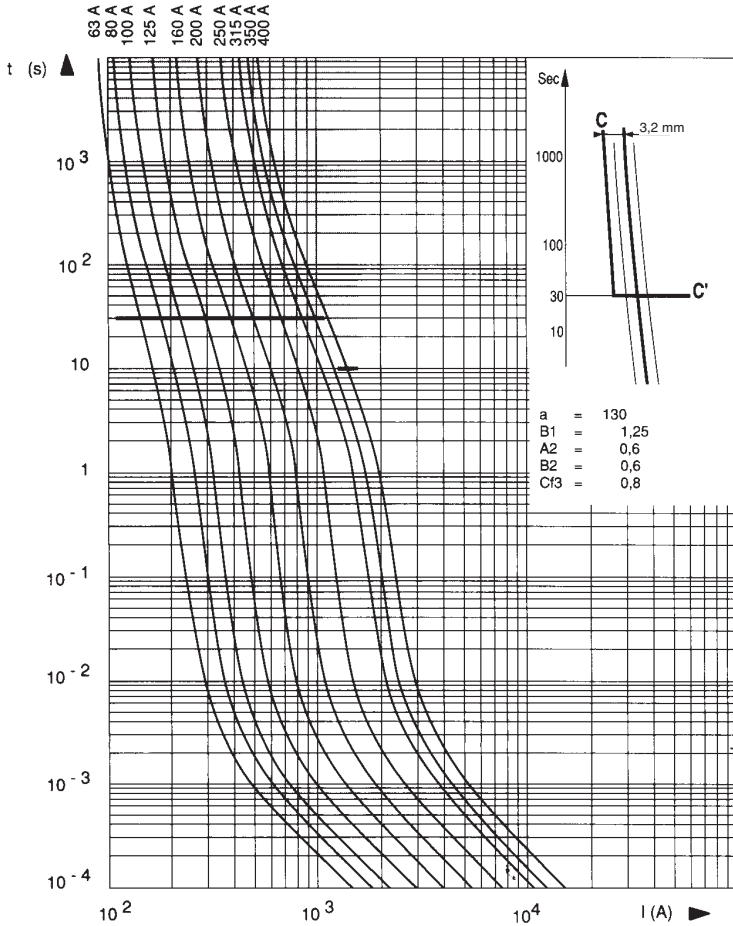

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

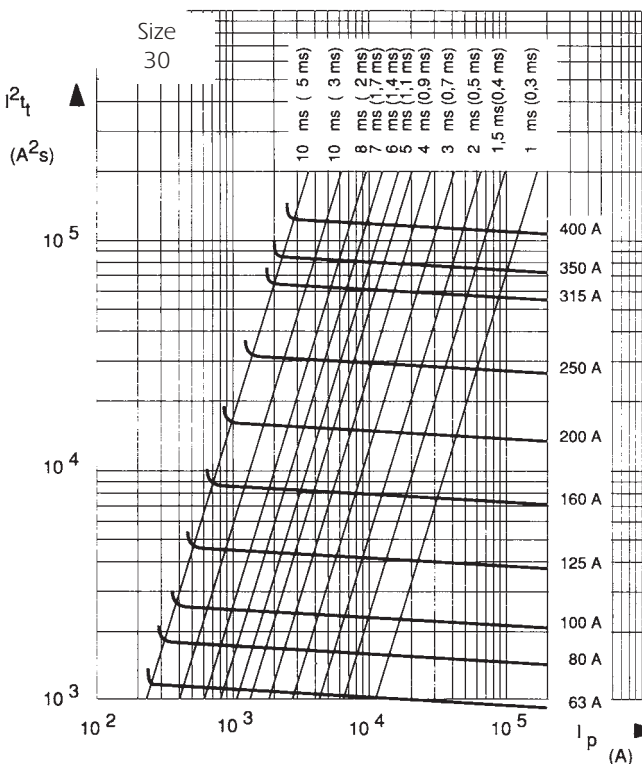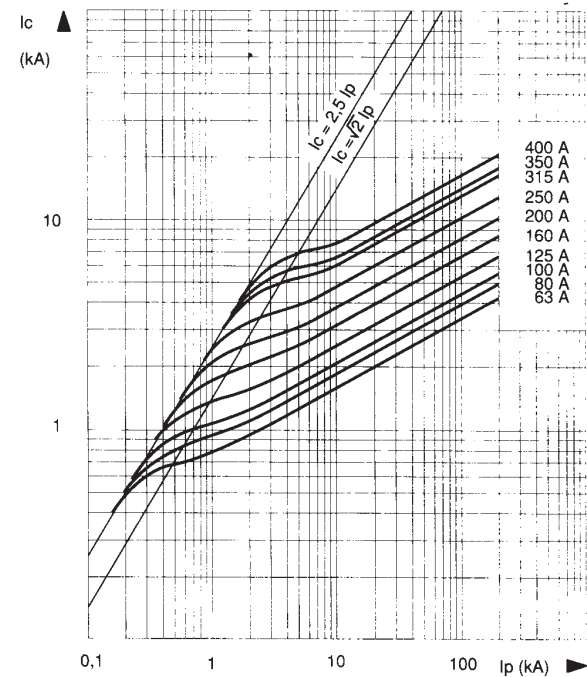

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

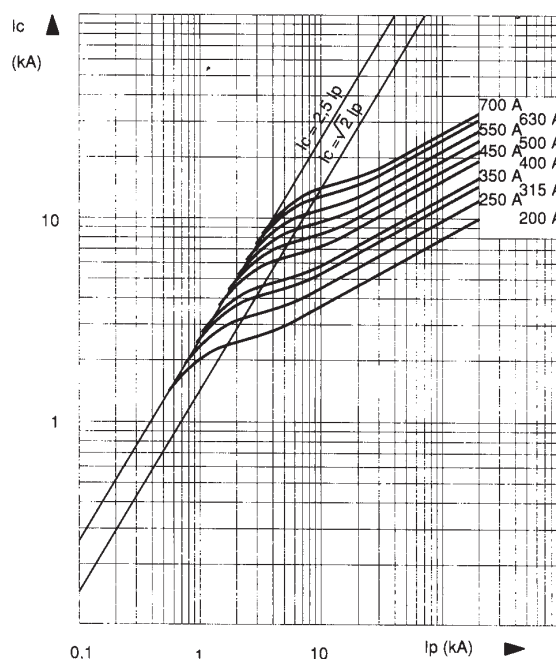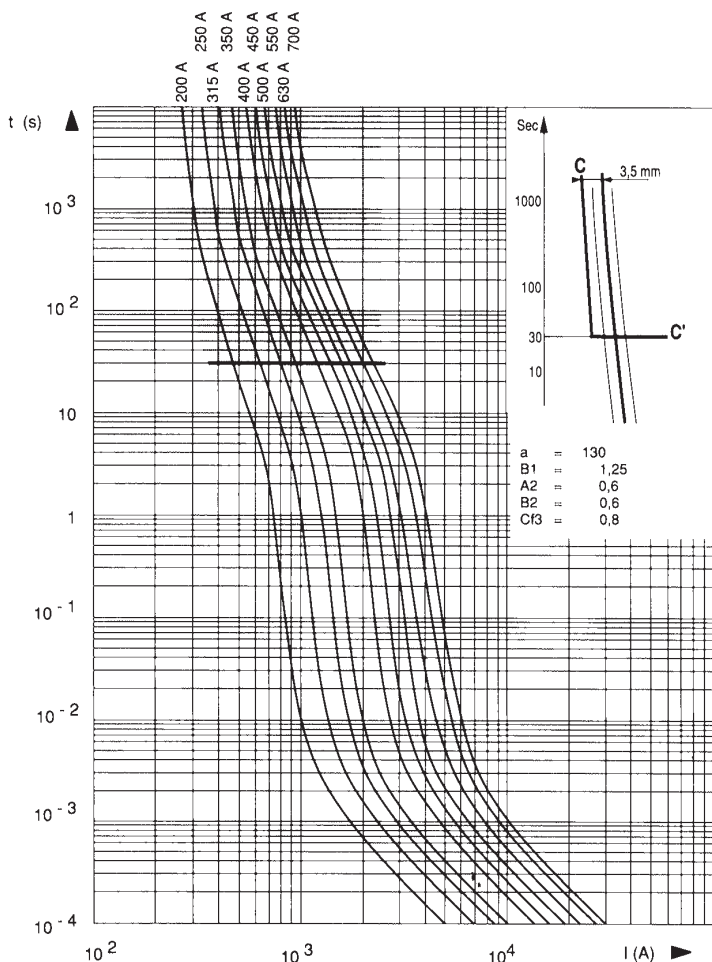


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

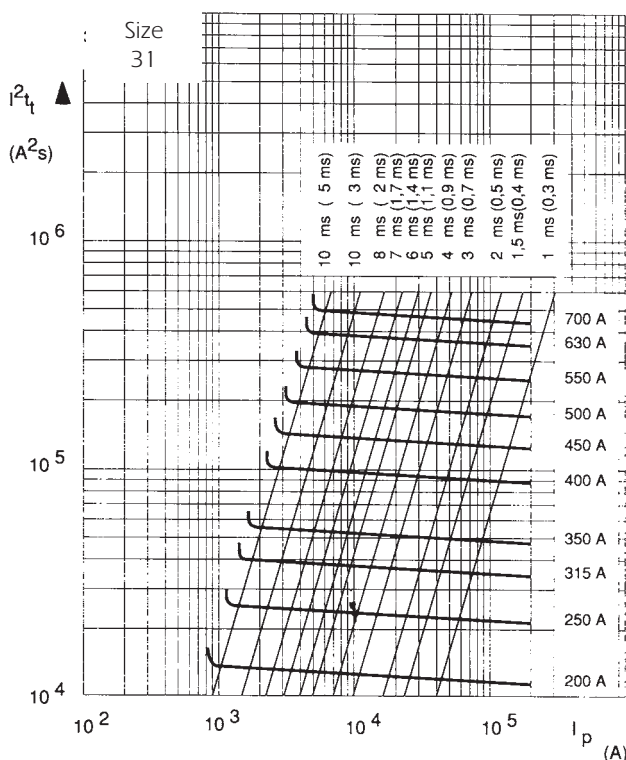





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

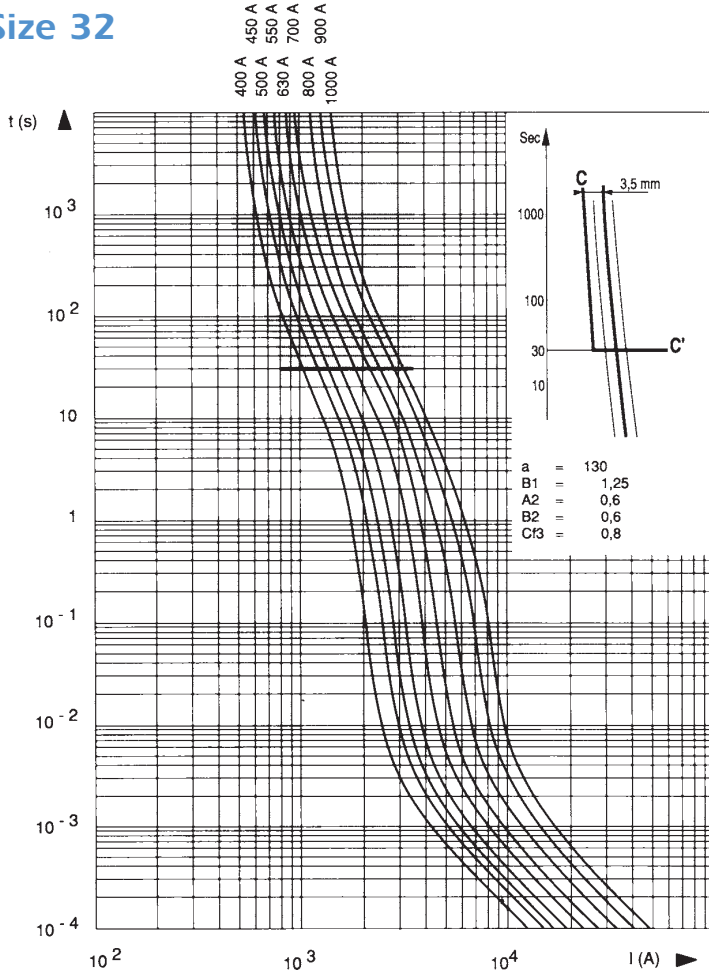

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

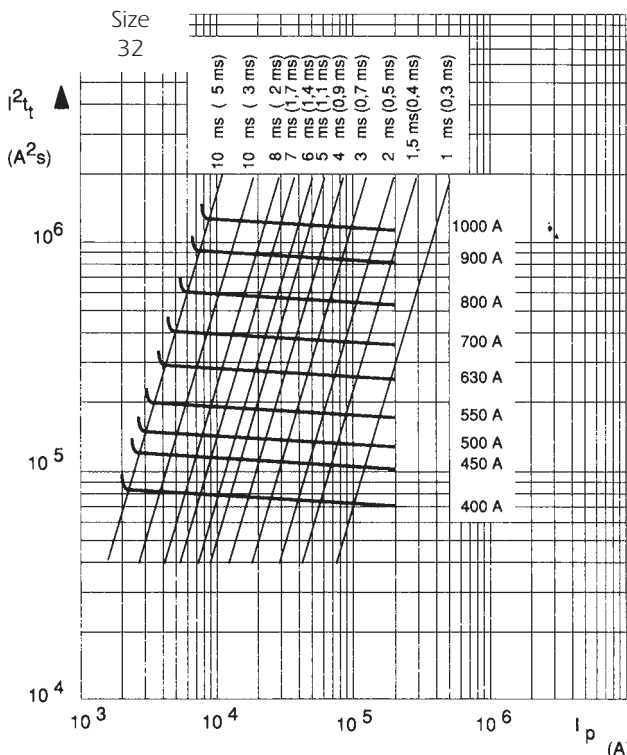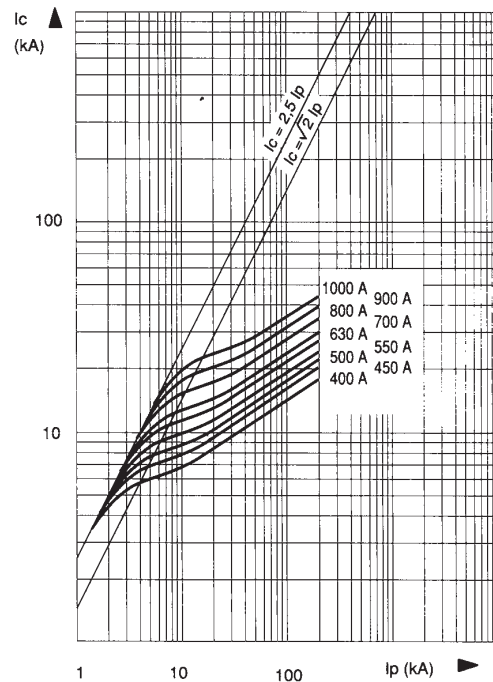

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

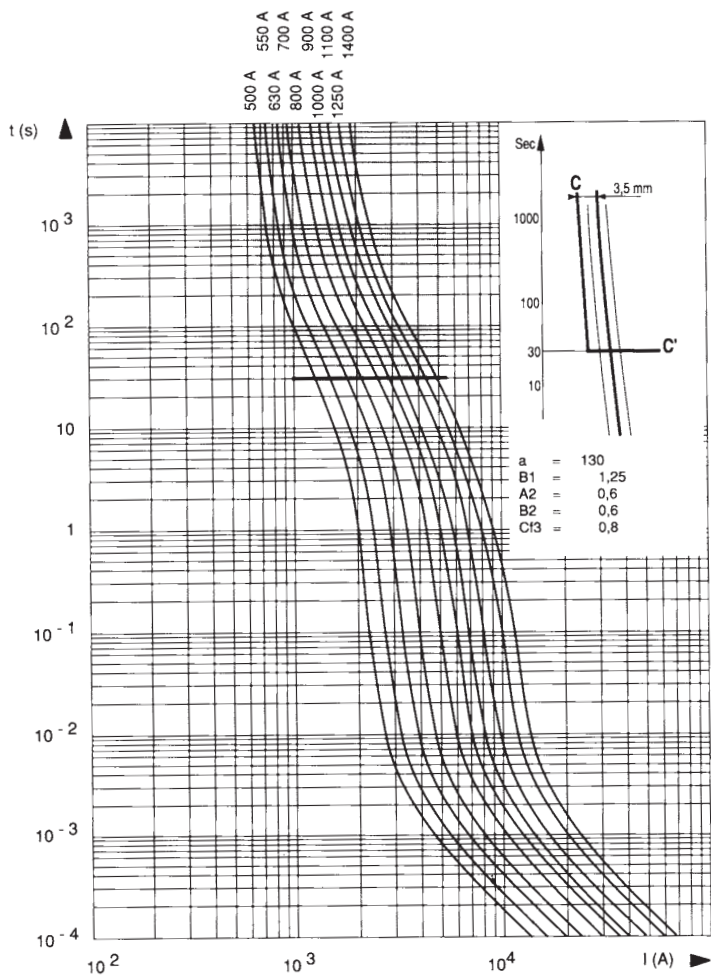

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

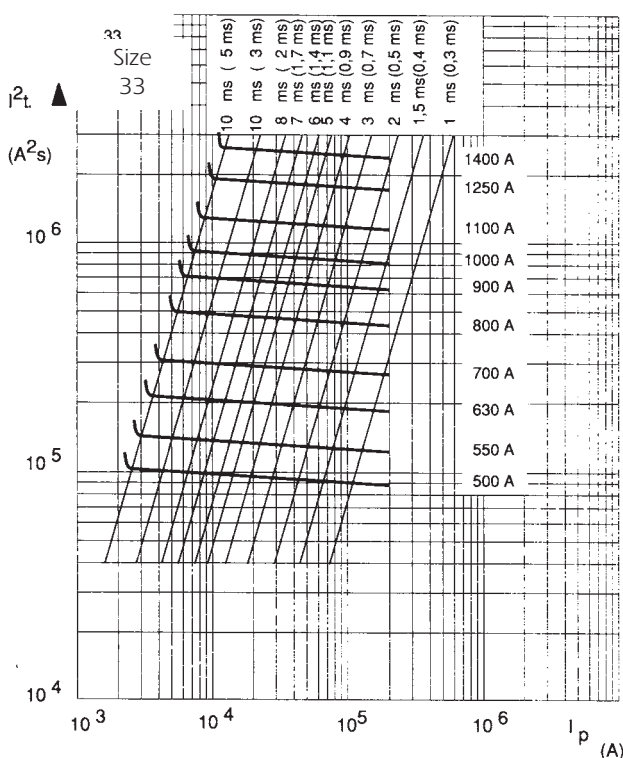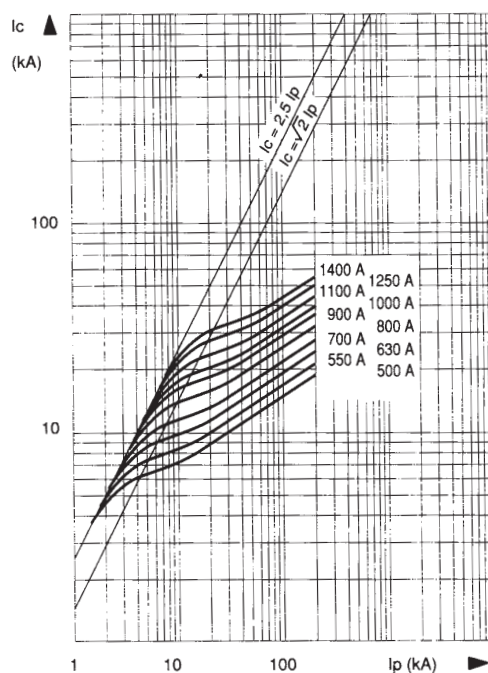

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

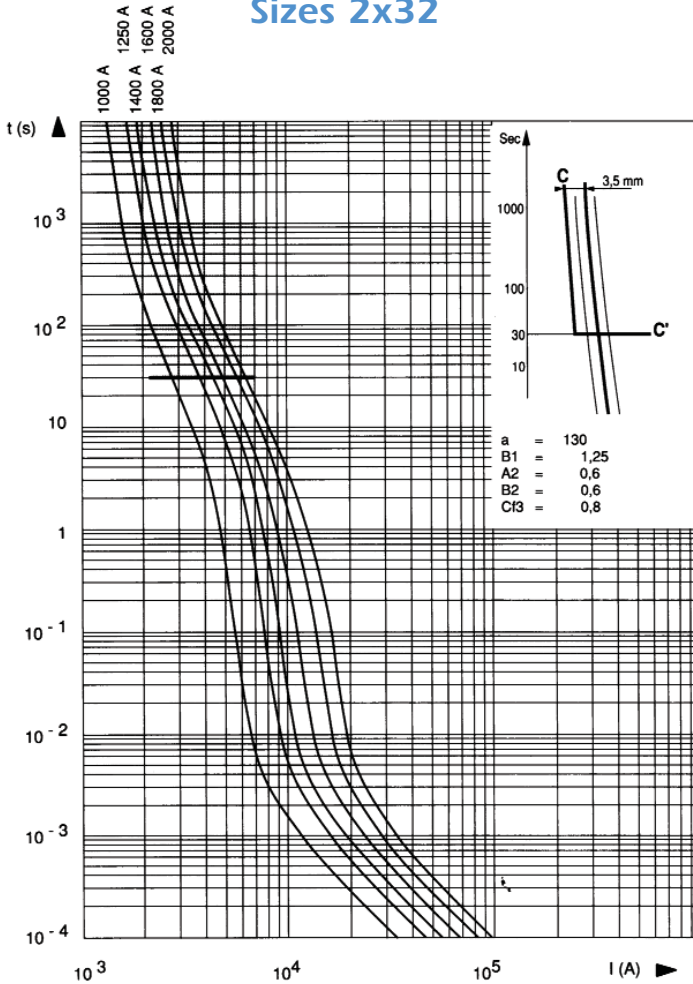

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

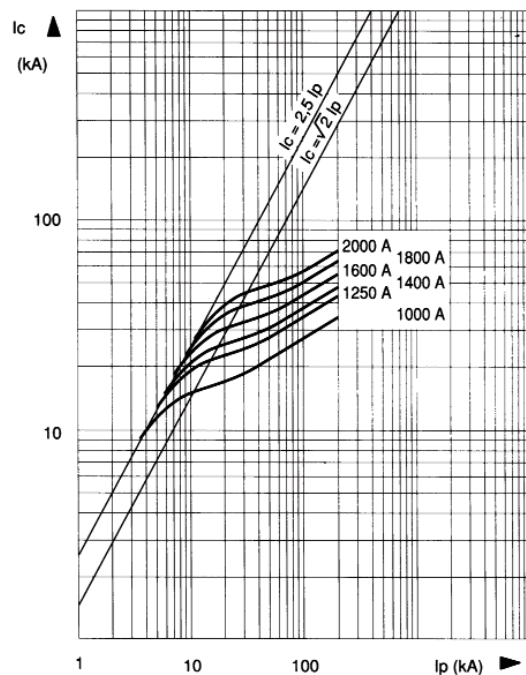

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

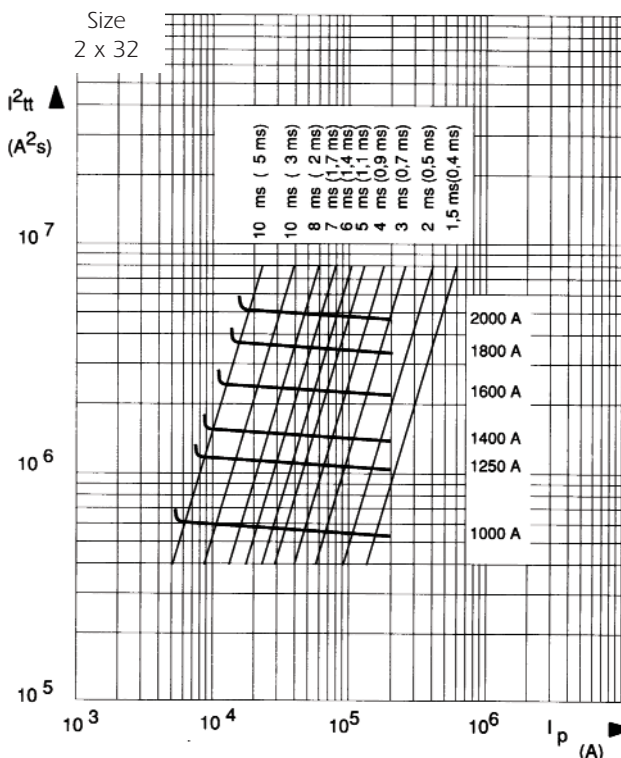

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

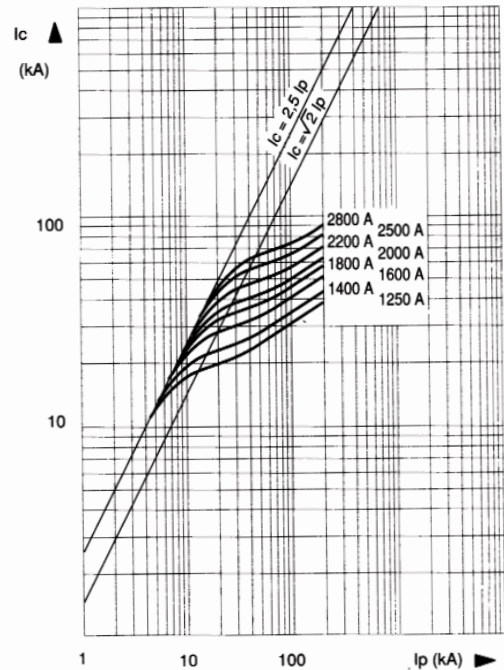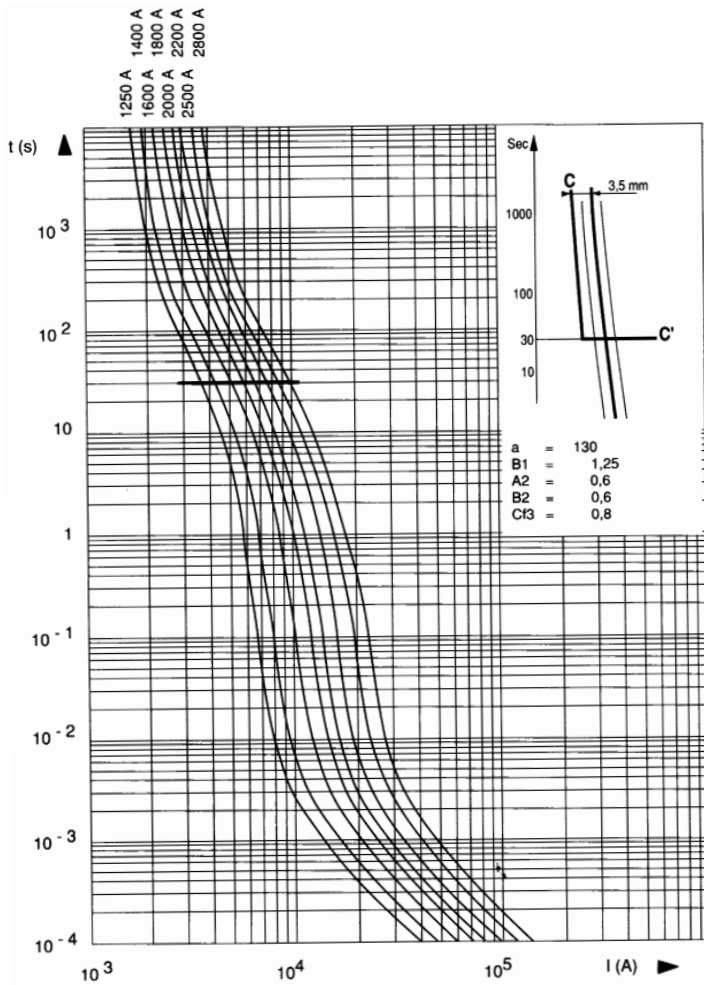

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

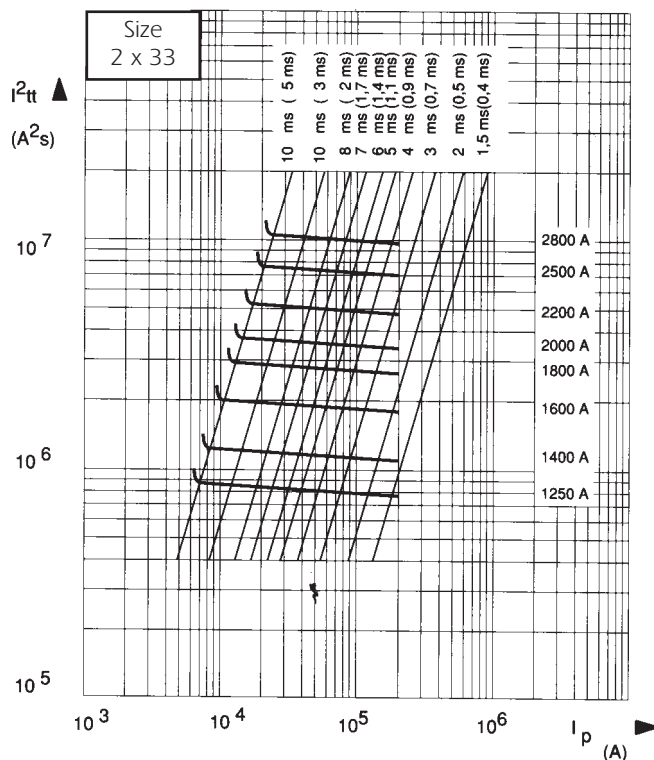

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

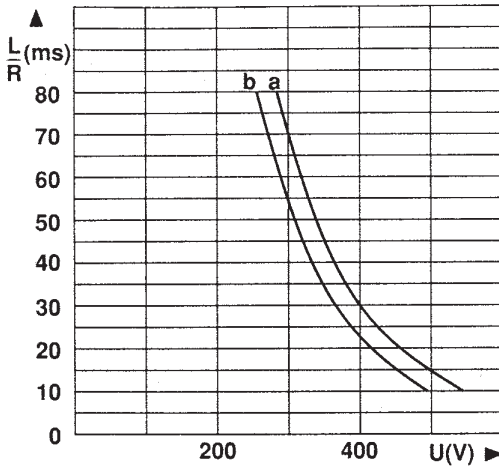

Rated current In (A)	Curves (*) and Ipm (I) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

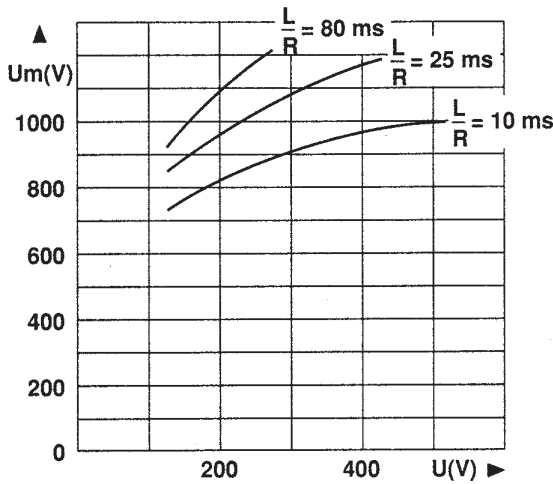

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

Ipm (I) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

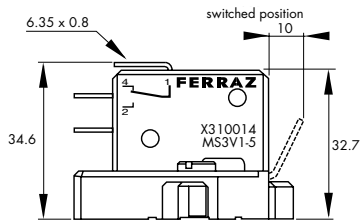


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1
but with 2 microswitches side by side


(9) Watertightness class

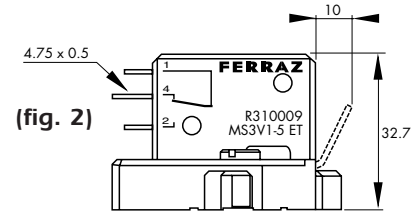


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

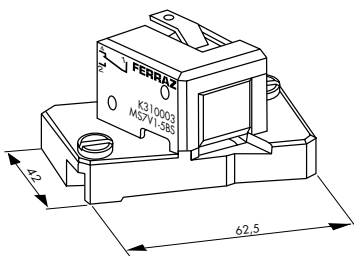

(fig. 5)

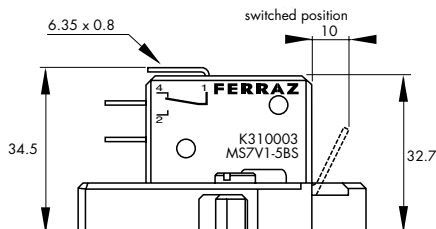


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

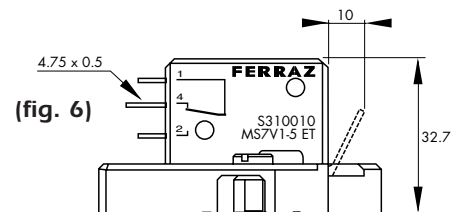



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA

Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
1100	270	1450(*)	140	165					
1250	410	1950(*)	150	180					
1400	555	2300(*)	160	200					
1600	870	3600(*)	165	205					
1800	1050	3700(*)	195	230					
32	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
33	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
			2000	950	5000	235	235		
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
			1800	530	2800	250	250		
			2000	700	3100(*)	280	280		
2200	950	4400(*)	280	280					
2500	1400	6600(*)	310	310					
2800	1900	8800(*)	330	330					
2X32	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
2x33	690	700	2000	950	5000	235	235	150(*)	150(*)
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
2x33	600	650	2000	700	3100(*)	280	280	160(*)	160(*)
			2200	950	4400(*)	280	280		
			2500	1400	6600(*)	310	310		
			2800	1900	8800(*)	330	330		

For others Ampere ratings consult us
12/04

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 Blades



Rated voltage as per American standard.

Size	Designation				Reference Number	Weight (g)	Pack.	Catalog Number		
					K					
30	A 070	URD 30 KI	0050		E301925	290	3	A070UD30KI050		
	A 070	URD 30 KI	0063		B300128			A070UD30KI63		
	A 070	URD 30 KI	0080		C300129			A070UD30KI080		
	A 070	URD 30 KI	0100		D300130			A070UD30KI100		
	A 070	URD 30 KI	0125		E300131			A070UD30KI125		
	A 070	URD 30 KI	0160		F300132			A070UD30KI160		
	A 070	URD 30 KI	0200		G300133			A070UD30KI200		
	A 070	URD 30 KI	0250		H300134			A070UD30KI250		
	A 070	URD 30 KI	0315		J300135			A070UD30KI315		
	A 070	URD 30 KI	0350		K300136			A070UD30KI350		
	A 070	URD 30 KI	0400		L300137			A070UD30KI400		
	A 070	URD 30 KI	0450		T301064			A070UD30KI450		
	A 070	URD 30 KI	0500		V301065			A070UD30KI500		
	A 070	URD 30 KI	0550		W301066			A070UD30KI550		
	A 065	URD 30 KI	0630		-					
	31	A 070	URD 31 KI	0160				F300385	430	3
A 070		URD 31 KI	0200		S300028	A070UD31KI200				
A 070		URD 31 KI	0250		T300029	A070UD31KI250				
A 070		URD 31 KI	0315		V300030	A070UD31KI315				
A 070		URD 31 KI	0350		R300050	A070UD31KI350				
A 070		URD 31 KI	0400		W300031	A070UD31KI400				
A 070		URD 31 KI	0450		X300032	A070UD31KI450				
A 070		URD 31 KI	0500		Y300033	A070UD31KI500				
A 070		URD 31 KI	0550		Z300034	A070UD31KI550				
A 070		URD 31 KI	0630		A300035	A070UD31KI630				
A 070		URD 31 KI	0700		B300036	A070UD31KI700				
A 070		URD 31 KI	0800		A301070	A070UD31KI800				
32	A 070	URD 32 KI	0400		Z300195	590	3	A070UD32KI400		
	A 070	URD 32 KI	0450		A300196			A070UD32KI450		
	A 070	URD 32 KI	0500		B300197			A070UD32KI500		
	A 070	URD 32 KI	0550		C300198			A070UD32KI550		
	A 070	URD 32 KI	0630		D300199			A070UD32KI630		
	A 070	URD 32 KI	0700		E300200			A070UD32KI700		
	A 070	URD 32 KI	0800		F300201			A070UD32KI800		
	A 070	URD 32 KI	0900		G300202			A070UD32KI900		
	A 070	URD 32 KI	1000		H300203			A070UD32KI1000		
	A 065	URD 32 KI	1100		-					
	A 060	URD 32 KI	1250		-			660		
	A 055	URD 32 KI	1400		-					
	A 055	URD 32 KI	1600		-					
	A 050	URD 32 KI	1800		-					
33	A 070	URD 33 KI	0500		W300238	860	3	A070UD33KI500		
	A 070	URD 33 KI	0550		X300239			A070UD33KI550		
	A 070	URD 33 KI	0630		Y300240			A070UD33KI630		
	A 070	URD 33 KI	0700		Z300241			A070UD33KI700		
	A 070	URD 33 KI	0800		A300242			A070UD33KI800		
	A 070	URD 33 KI	0900		B300243			A070UD33KI900		
	A 070	URD 33 KI	1000		C300244			A070UD33KI1000		
	A 070	URD 33 KI	1100		D300245			A070UD33KI1100		
	A 070	URD 33 KI	1250		E300246			A070UD33KI1250		
	A 070	URD 33 KI	1400		F300247			A070UD33KI1400		
	A 065	URD 33 KI	1600		E302063			A065UD33KI1600		
	A 065	URD 33 KI	1800		-					
	A 060	URD 33 KI	2000		-					
	A 055	URD 33 KI	2250		-					
	A 050	URD 33 KI	2500		-					
								1070		



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 Blades



Rated voltage as per American standard.

Size	Designation				Reference Number	Weight (g)	Pack.	Catalog Number
					L			
30	A 070	URD 30 LI	0050		A301921	290	3	A070UD30LI050
	A 070	URD 30 LI	0063		M300138			A070UD30LI63
	A 070	URD 30 LI	0080		N300139			A070UD30LI080
	A 070	URD 30 LI	0100		P300140			A070UD30LI100
	A 070	URD 30 LI	0125		Q300141			A070UD30LI125
	A 070	URD 30 LI	0160		R300142			A070UD30LI160
	A 070	URD 30 LI	0200		S300143			A070UD30LI200
	A 070	URD 30 LI	0250		T300144			A070UD30LI250
	A 070	URD 30 LI	0315		V300145			A070UD30LI315
	A 070	URD 30 LI	0350		W300146			A070UD30LI350
	A 070	URD 30 LI	0400		X300147			A070UD30LI400
	A 070	URD 30 LI	0450		K300527			A070UD30LI450
	A 070	URD 30 LI	0500		L300528			A070UD30LI500
	A 070	URD 30 LI	0550		M300529			A070UD30LI550
	A 060	URD 30 LI	0630		P302003			A060UD30LI630
31	A 070	URD 31 LI	0160		D301924	430	3	A070UD31LI160
	A 070	URD 31 LI	0200		V300697			A070UD31LI200
	A 070	URD 31 LI	0250		W300698			A070UD31LI250
	A 070	URD 31 LI	0315		X300699			A070UD31LI315
	A 070	URD 31 LI	0350		Y300700			A070UD31LI350
	A 070	URD 31 LI	0400		Z300701			A070UD31LI400
	A 070	URD 31 LI	0450		A300702			A070UD31LI450
	A 070	URD 31 LI	0500		B300703			A070UD31LI500
	A 070	URD 31 LI	0550		C300704			A070UD31LI550
	A 070	URD 31 LI	0630		D300705			A070UD31LI630
	A 070	URD 31 LI	0700		E300706			A070UD31LI700
A 070	URD 31 LI	0800		F300707	A070UD31LI800			
32	A 070	URD 32 LI	0400		J300204	590	3	A070UD32LI400
	A 070	URD 32 LI	0450		K300205			A070UD32LI450
	A 070	URD 32 LI	0500		L300206			A070UD32LI500
	A 070	URD 32 LI	0550		M300207			A070UD32LI550
	A 070	URD 32 LI	0630		N300208			A070UD32LI630
	A 070	URD 32 LI	0700		P300209			A070UD32LI700
	A 070	URD 32 LI	0800		Q300210			A070UD32LI800
	A 070	URD 32 LI	0900		R300211			A070UD32LI900
	A 070	URD 32 LI	1000		S300212			A070UD32LI1000
	A 065	URD 32 LI	1100		B301071			A065UD32LI1100
	A 060	URD 32 LI	1250		C301072			A060UD32LI1250
	A 055	URD 32 LI	1400		D301073			A055UD32LI1400
	A 055	URD 32 LI	1600		E301074			A055UD32LI1600
	A 050	URD 32 LI	1800		F301075			A050UD32LI1800
33	A 070	URD 33 LI	0500		K300228	860	3	A070UD33LI500
	A 070	URD 33 LI	0550		L300229			A070UD33LI550
	A 070	URD 33 LI	0630		M300230			A070UD33LI630
	A 070	URD 33 LI	0700		N300231			A070UD33LI700
	A 070	URD 33 LI	0800		P300232			A070UD33LI800
	A 070	URD 33 LI	0900		Q300233			A070UD33LI900
	A 070	URD 33 LI	1000		R300234			A070UD33LI1000
	A 070	URD 33 LI	1100		S300235			A070UD33LI1100
	A 070	URD 33 LI	1250		T300236			A070UD33LI1250
	A 070	URD 33 LI	1400		V300237			A070UD33LI1400
	A 065	URD 33 LI	1600		G301076			A065UD33LI1600
	A 065	URD 33 LI	1800		H301077			A065UD33LI1800
	A 060	URD 33 LI	2000		J301078			A060UD33LI2000
	A 055	URD 33 LI	2250		K301079			A055UD33LI2250
	A 050	URD 33 LI	2500		L301080			A050UD33LI2500

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 Blades



Rated voltage as per American standard.

Size	Designation	Reference Number	Weight (g)	Pack.	Catalog Number
		LL			
31	A 070 URD 31 LLI 0160	C301923	290		A070UD31LLI160
	A 070 URD 31 LLI 0200	J300158			A070UD31LLI200
	A 070 URD 31 LLI 0250	K300159			A070UD31LLI250
	A 070 URD 31 LLI 0315	L300160			A070UD31LLI315
	A 070 URD 31 LLI 0350	M300161			A070UD31LLI350
	A 070 URD 31 LLI 0400	N300162			A070UD31LLI400
	A 070 URD 31 LLI 0450	P300163			A070UD31LLI450
	A 070 URD 31 LLI 0500	Q300164			A070UD31LLI500
	A 070 URD 31 LLI 0550	R300165			A070UD31LLI550
	A 070 URD 31 LLI 0630	S300166			A070UD31LLI630
	A 070 URD 31 LLI 0700	T300167			A070UD31LLI700
	A 070 URD 31 LLI 0800	J300526			A070UD31LLI800




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC American Terminals - 30 - 33 Blades

	Size	A	B	C	D	E ₁ ^{±1,1}	E ₂ ^{±1,1}	F	H	J	K	L	e
K	30	40 1-19/32"	46,5 1-27/32"	82 3-7/32"	47,5 1-7/8"	68 2-11/16"	107 4-7/32"	21 53/64"	25 1"	10,5 13/32"	30 1-3/16"	129 5-5/64"	6 15/64"
	31	51 2"	56,5 2-7/32"	91 3-37/64"	47,5 1-7/8"	68 2-11/16"	107 4-7/32"	25,5 1"	25 1"	10,5 13/32"	30 1-3/16"	129 5-5/64"	6 15/64"
	32	60 2-3/8"	65,5 2-37/64"	100 3-15/16"	47,5 1-7/8"	74,5 2-59/64"	109 4-9/32"	30 1-3/16"	32 1-1/4"	14,6 9/16"	32 1-1/4"	134 5-9/32"	6 15/64"
	33	74,5 2-15/16"	79,5 3-1/8"	114 4-1/2"	48,5 1-29/32"	75,4 2-31/32"	107,6 4-15/64"	37,2 1-15/32"	40 1-9/16"	15,9 5/8"	32 1-1/4"	134 5-9/32"	6 15/64"
L	30	40 1-19/32"	46,5 1-27/32"	82 3-7/32"	47,5 1-7/8"	87,6 3-7/16"	126,6 5"	21 53/64"	25 1"	10,5 13/32"	30 1-3/16"	148,5 5-27/32"	6 15/64"
	31	51 2"	56,5 2-7/32"	91 3-37/64"	47,5 1-7/8"	91,6 3-19/32"	122,4 4-13/16"	25,5 1"	25 1"	14,6 9/16"	30 1-3/16"	148,6 5-27/32"	6 15/64"
	32	60 2-3/8"	65,5 2-37/64"	100 3-15/16"	47,5 1-7/8"	94,2 3-45/64"	129 5-5/64"	30 1-3/16"	32 1-1/4"	14,6 9/16"	32 1-1/4"	153 5-9/32"	6 15/64"
	33	74,5 2-15/16"	79,5 3-1/8"	114 4-1/2"	48,5 1-29/32"	94,4 3-23/32"	126,6 5"	37,2 1-15/32"	40 1-9/16"	15,9 5/8"	32 1-1/4"	153 6"	6 15/64"
LL	31 2"	51 2-7/32"	56,5 3-37/64"	91 3-37/64"	47,5 1-7/8"	87,6 3-7/16"	126,6 5"	25,5 1"	25 1"	10,5 13/32"	30 1-3/16"	148,6 5-27/32"	6 15/64"

Note:

dimensions in mm
dimensions in inches

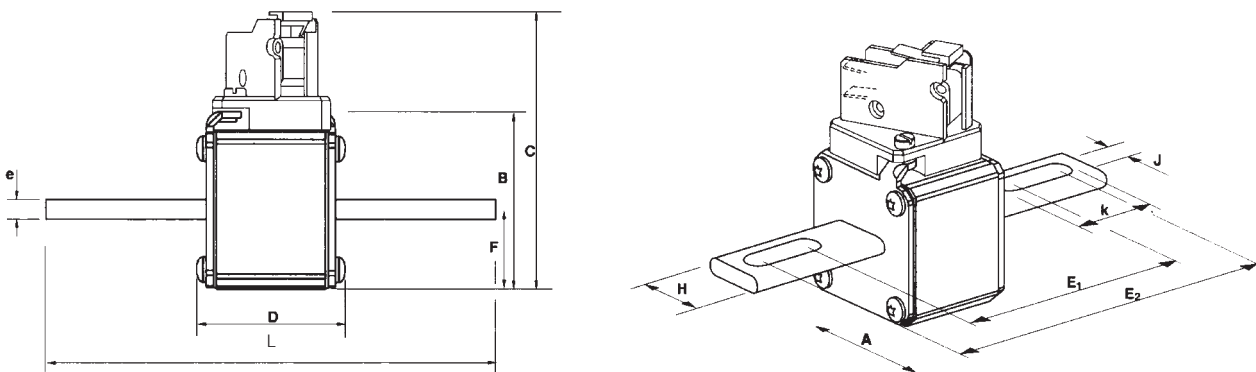

Microswitches supplied separately see microswitches for PSC 3x & 7x section




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

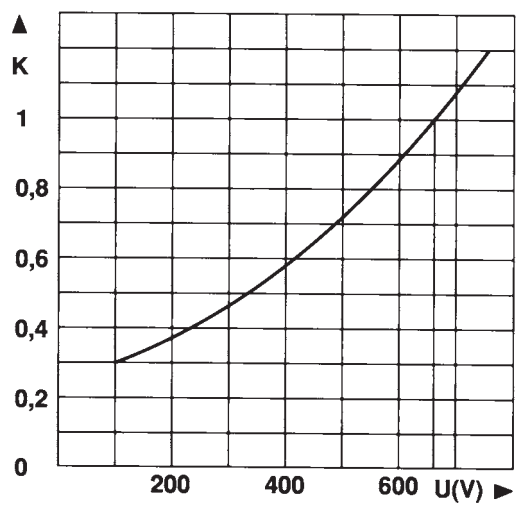

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

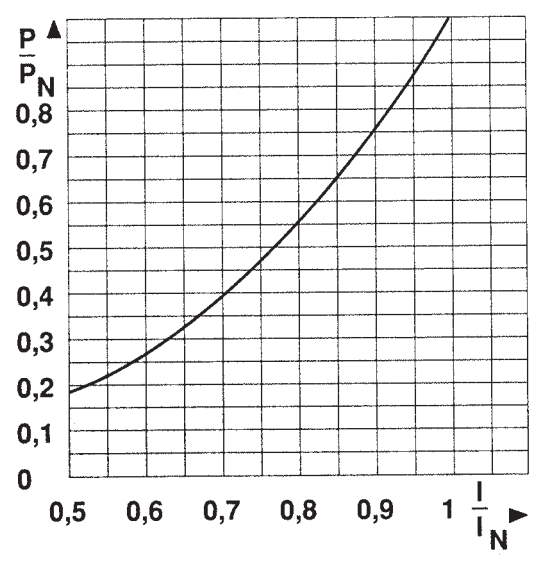

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

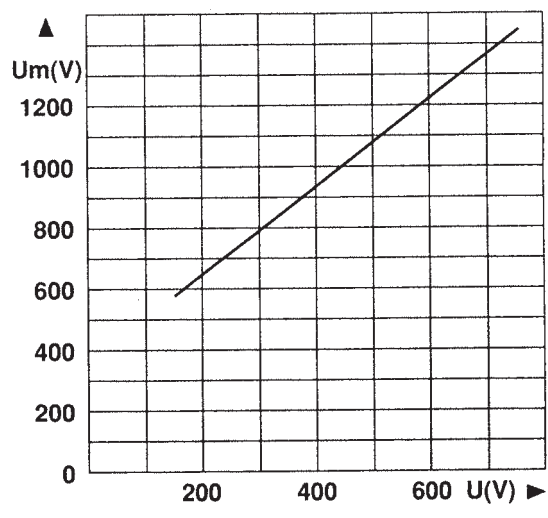


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

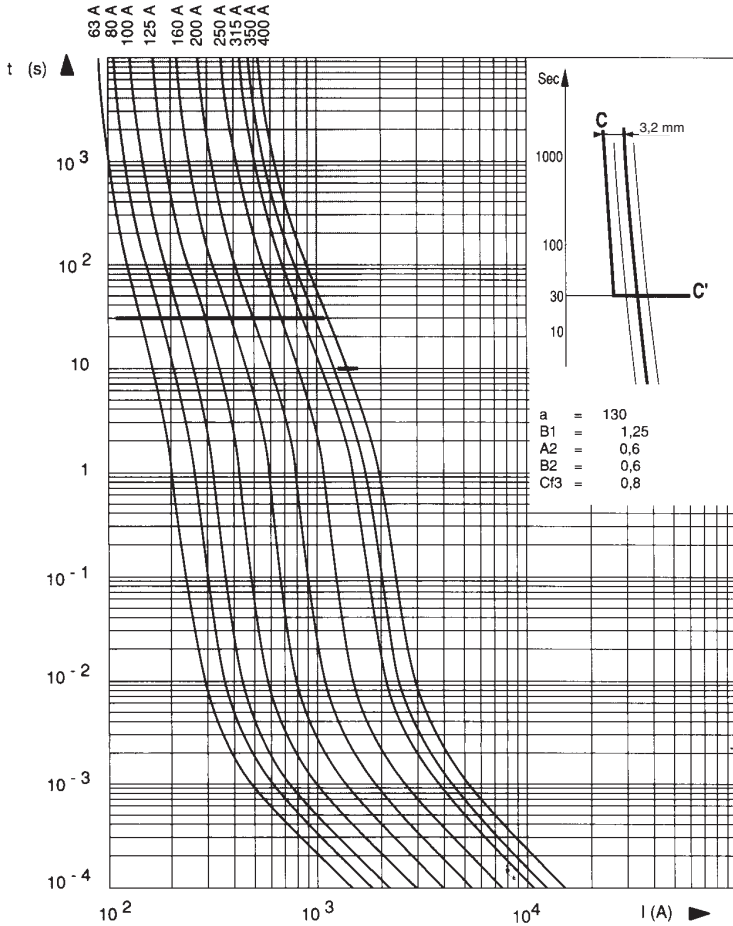

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

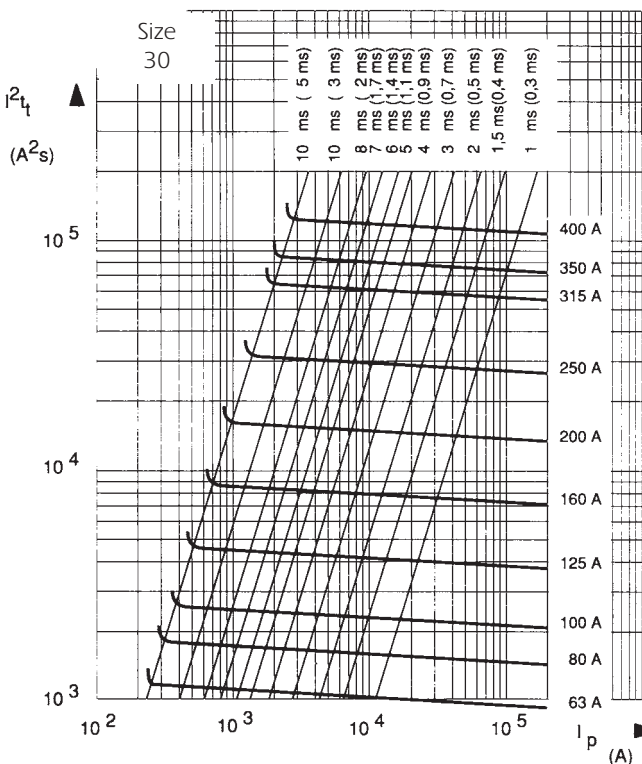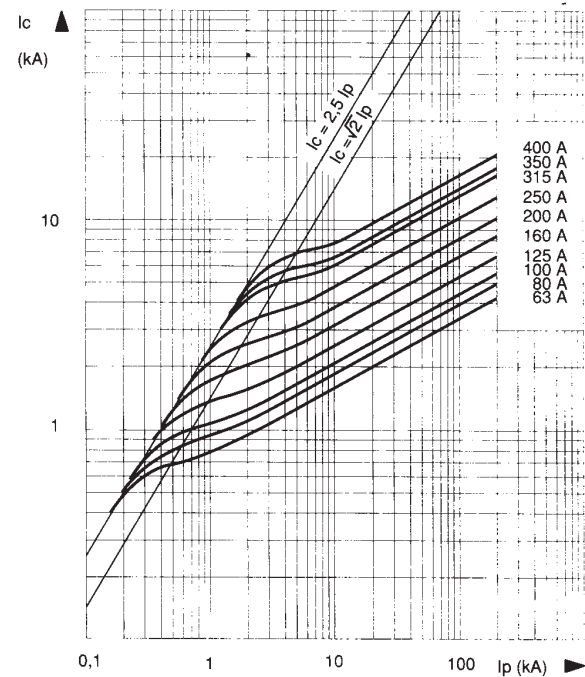

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

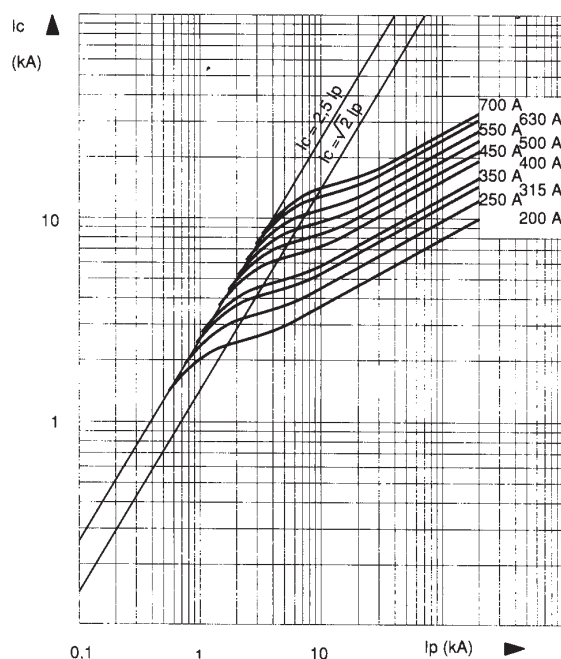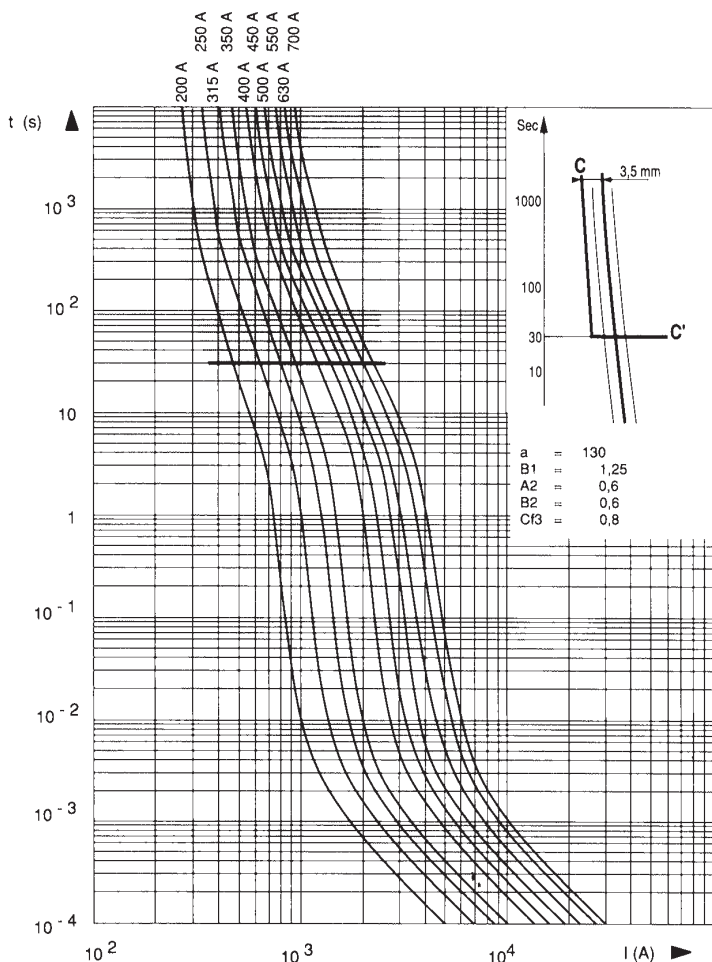


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

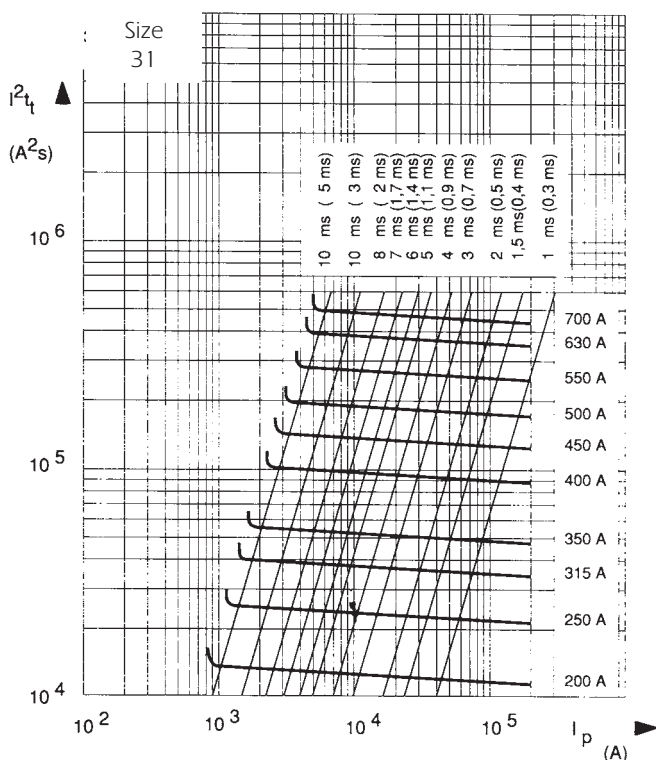





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

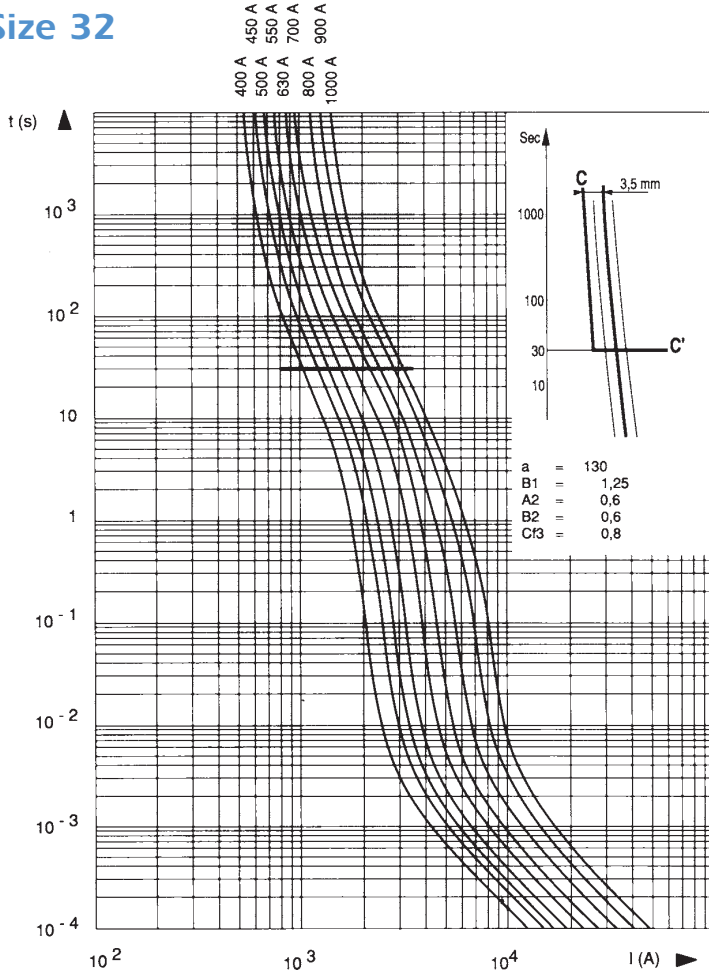

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_c that the current may reach as a function of the prospective fault current I_p .

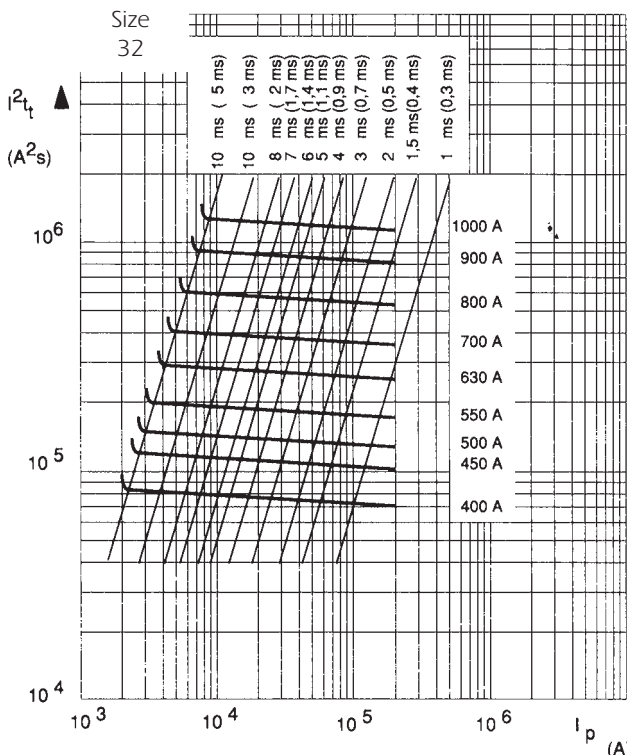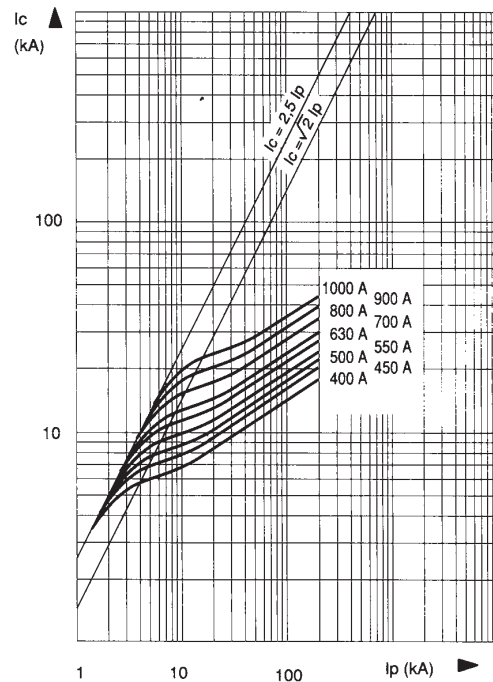

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

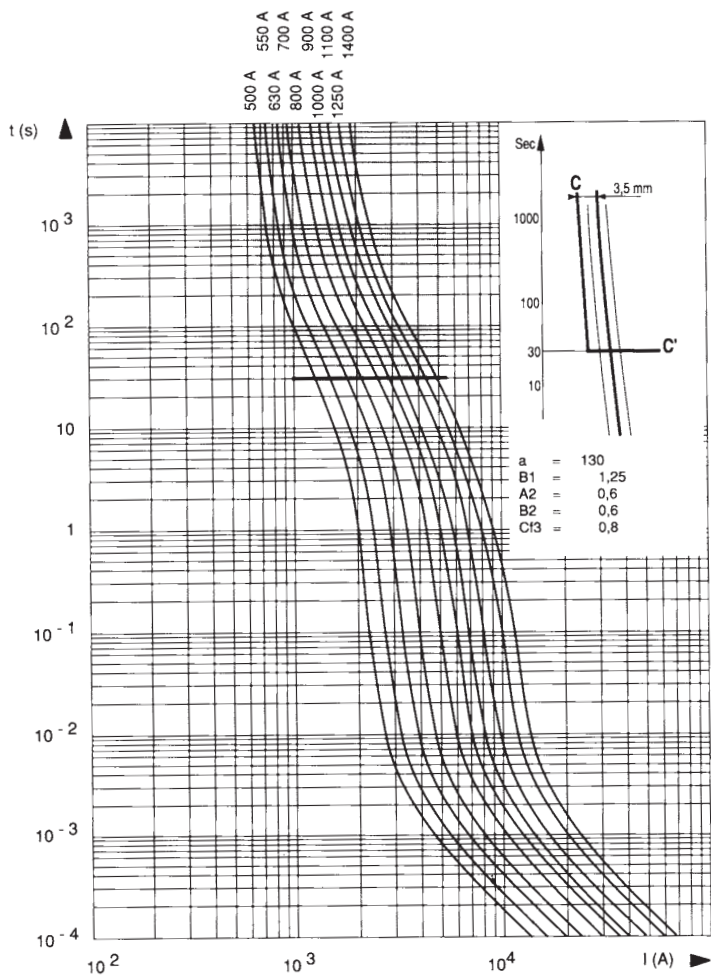

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

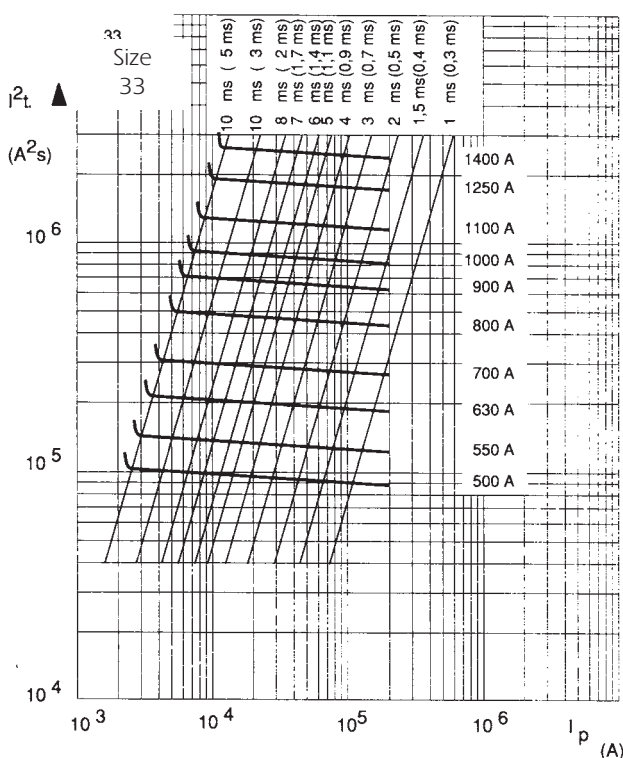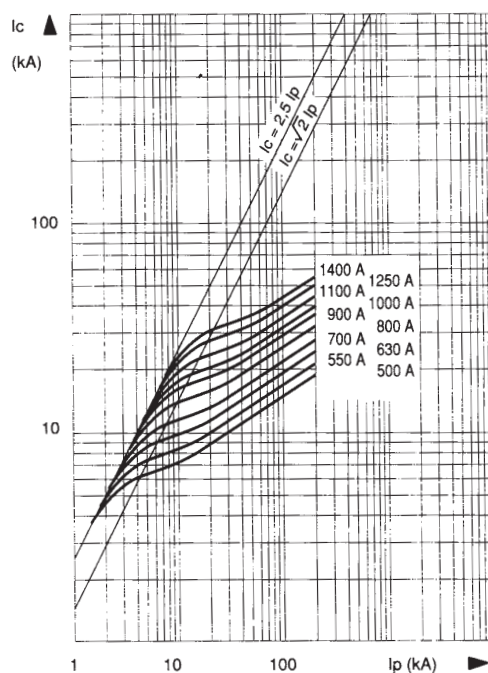

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

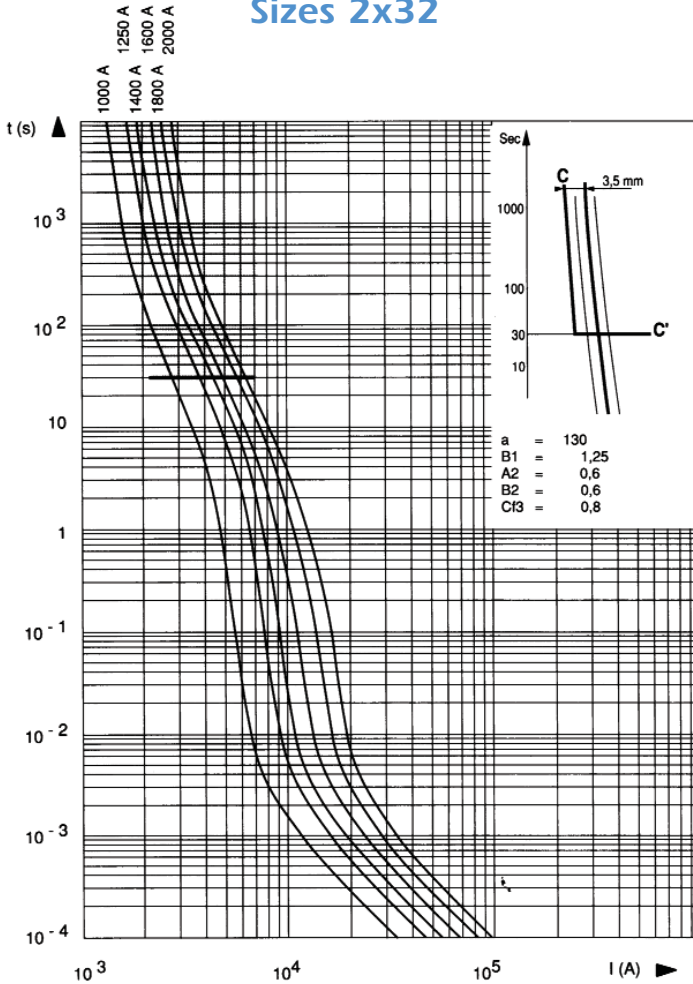

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

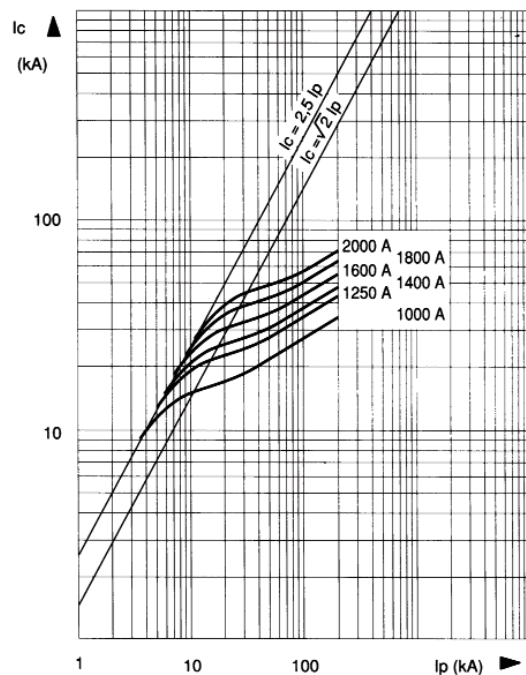

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

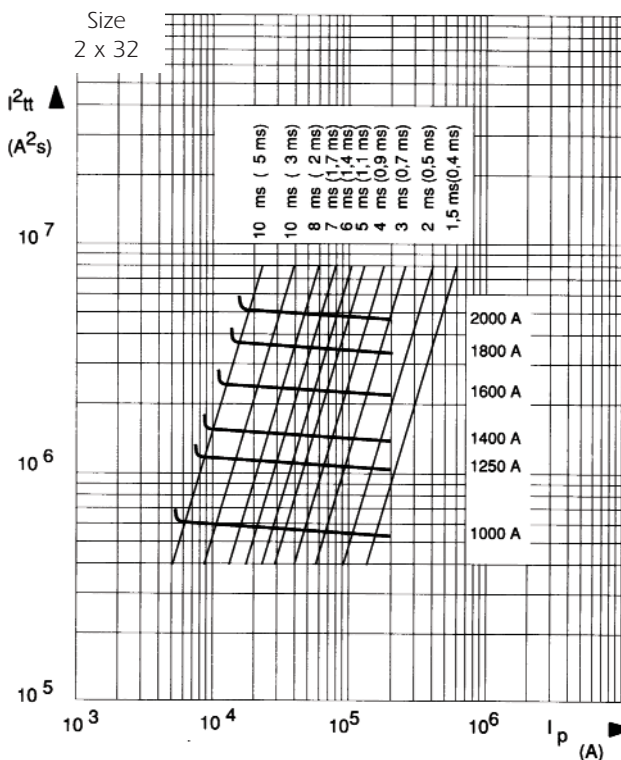

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

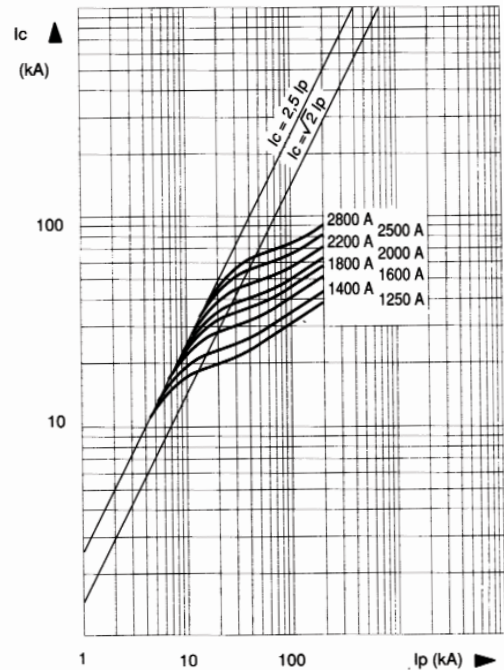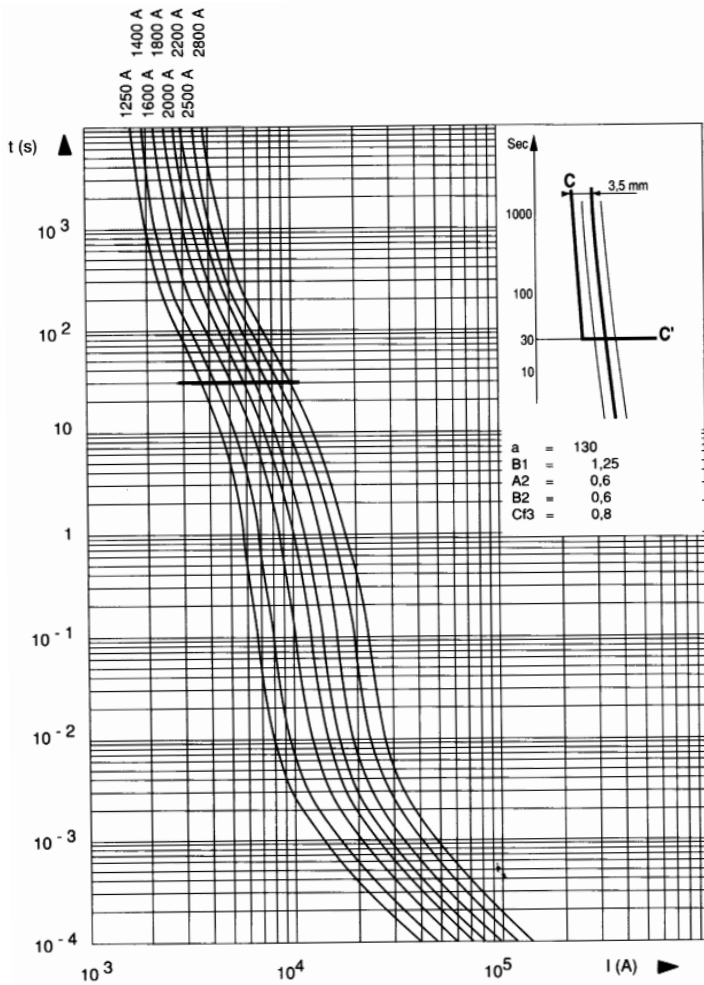

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

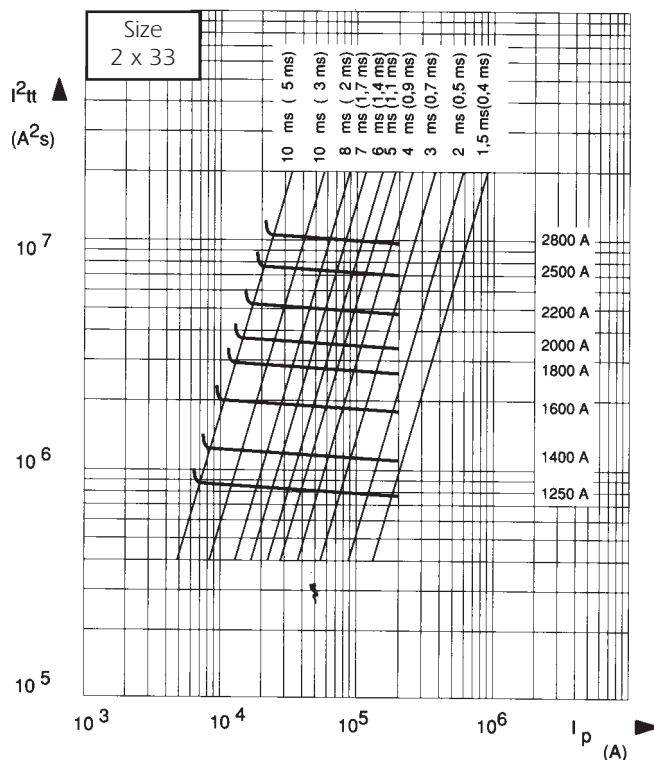

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

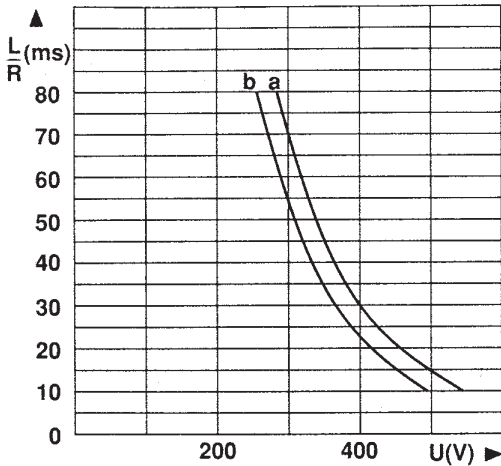

Rated current In (A)	Curves (*) and Ipm (I) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

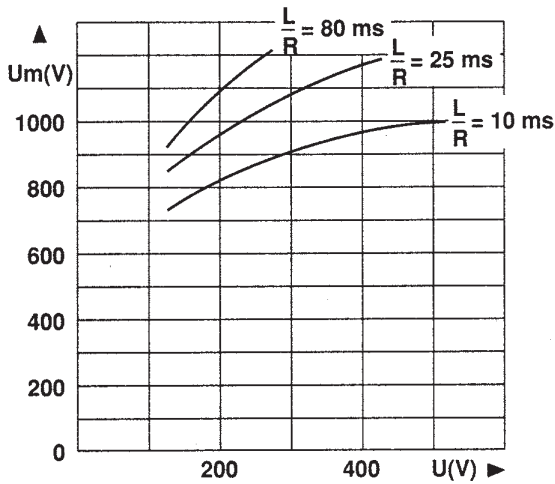

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

Ipm (I) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

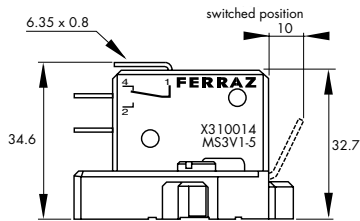


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

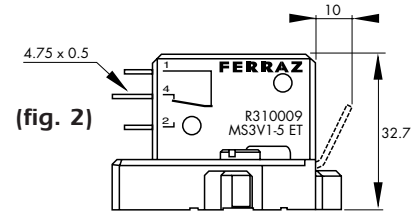


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

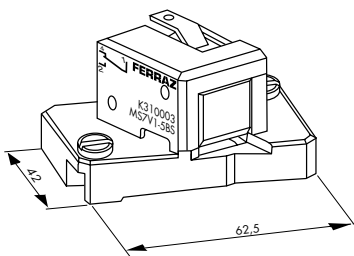

(fig. 5)

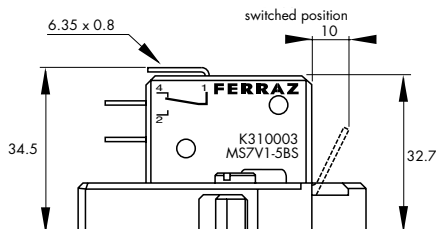


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

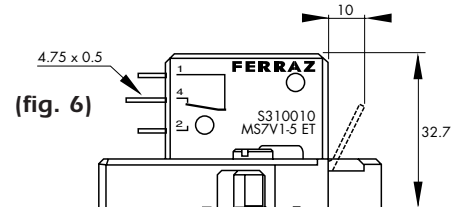



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA



Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
32	690	700	1100	270	1450(*)	140	165	200	200
			1250	410	1950(*)	150	180		
			1400	555	2300(*)	160	200		
			1600	870	3600(*)	165	205		
			1800	1050	3700(*)	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
			450	500	1800	195	230		
450	500	1800	195	230					
33	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
2X32	690	700	800	60	320	144		200	200
			1000	110	590	165			
			1250	220	1100	190			
			1400	300	1600	200			
			1600	450	2400	220			
			1800	700	3500	225			
			2000	950	5000	235			
2x33	690	700	2200	1100	5250(*)	280		170	170
			1000	76	395	220			
			1250	160	850	230			
			1400	225	1200	240			
			1600	375	1900	250			
			1800	530	2800	250			
			2000	700	3100(*)	280			
2x33	600	650	2200	950	4400(*)	280		160(*)	160(*)
			2500	1400	6600(*)	310			
			2800	1900	8800(*)	330			
			2800	1900	8800(*)	330			
			2800	1900	8800(*)	330			

For others Ampere ratings consult us
12/04

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC IEC Terminals French - 30 - 33 End contacts

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
30	6,9 URD 30 TTF 0050	S300373	245	3	PC30UD69V50TF
	6,9 URD 30 TTF 0063	M300000			PC30UD69V63TF
	6,9 URD 30 TTF 0080	S300051			PC30UD69V80TF
	6,9 URD 30 TTF 0100	T300052			PC30UD69V100TF
	6,9 URD 30 TTF 0125	V300053			PC30UD69V125TF
	6,9 URD 30 TTF 0160	W300054			PC30UD69V160TF
	6,9 URD 30 TTF 0200	X300055			PC30UD69V200TF
	6,9 URD 30 TTF 0250	Y300056			PC30UD69V250TF
	6,9 URD 30 TTF 0315	Z300057			PC30UD69V315TF
	6,9 URD 30 TTF 0350	A300058			PC30UD69V350TF
	6,9 URD 30 TTF 0400	B300059			PC30UD69V400TF
	6,9 URD 30 TTF 0450	V300398			PC30UD69V450TF
	6,9 URD 30 TTF 0500	W300399			PC30UD69V500TF
	6,9 URD 30 TTF 0550	X300400			PC30UD69V550TF
	6 URD 30 TTF 0630	L301770			PC30UD60V630TF
	31	6,9 URD 31 TTF 0160			M300299
6,9 URD 31 TTF 0200		N300001	PC31UD69V200TF		
6,9 URD 31 TTF 0250		P300002	PC31UD69V250TF		
6,9 URD 31 TTF 0315		Q300003	PC31UD69V315TF		
6,9 URD 31 TTF 0350		M300046	PC31UD69V350TF		
6,9 URD 31 TTF 0400		R300004	PC31UD69V400TF		
6,9 URD 31 TTF 0450		S300005	PC31UD69V450TF		
6,9 URD 31 TTF 0500		T300006	PC31UD69V500TF		
6,9 URD 31 TTF 0550		V300007	PC31UD69V550TF		
6,9 URD 31 TTF 0630		W300008	PC31UD69V630TF		
6,9 URD 31 TTF 0700		X300009	PC31UD69V700TF		
6,9 URD 31 TTF 0800		Y300401	PC31UD69V800TF		
32	6,9 URD 32 TTF 0315	M302162	510	3	PC32UD69V315TF
	6,9 URD 32 TTF 0350	N302163			PC32UD69V350TF
	6,9 URD 32 TTF 0400	H300065			PC32UD69V400TF
	6,9 URD 32 TTF 0450	J300066			PC32UD69V450TF
	6,9 URD 32 TTF 0500	K300067			PC32UD69V500TF
	6,9 URD 32 TTF 0550	L300068			PC32UD69V550TF
	6,9 URD 32 TTF 0630	M300069			PC32UD69V630TF
	6,9 URD 32 TTF 0700	N300070			PC32UD69V700TF
	6,9 URD 32 TTF 0800	P300071			PC32UD69V800TF
	6,9 URD 32 TTF 0900 **	Q300072			PC32UD69V900TF
	6,9 URD 32 TTF 1000 **	S300074			PC32UD69V1000TF
	6 URD 32 TTF 1100 **	M300759			PC32UD60V100TF
	5,5 URD 32 TTF 1250 **	P301060			PC32UD55V1250TF
	5 URD 32 TTF 1400 **	Q301061			PC32UD50V1400TF
	5 URD 32 TTF 1600 **	H300893			PC32UD50V1600TF
	4,5 URD 32 TTF 1800 **	R301062			PC32UD45V1800TF
33	6,9 URD 33 TTF 0450	W302170	790	3	PC33UD69V450TF
	6,9 URD 33 TTF 0500	V300076			PC33UD69V500TF
	6,9 URD 33 TTF 0550	W300077			PC33UD69V550TF
	6,9 URD 33 TTF 0630	X300078			PC33UD69V630TF
	6,9 URD 33 TTF 0700	Y300079			PC33UD69V700TF
	6,9 URD 33 TTF 0800	Z300080			PC33UD69V800TF
	6,9 URD 33 TTF 0900	A300081			PC33UD69V900TF
	6,9 URD 33 TTF 1000	B300082			PC33UD69V1000TF
	6,9 URD 33 TTF 1100	C300083			PC33UD69V1100TF
	6,9 URD 33 TTF 1250 **	D300084			PC33UD69V1250TF
	6,9 URD 33 TTF 1400 **	E300085			PC33UD69V1400TF
	6 URD 33 TTF 1500 **	Y300585			PC33UD60V1500TF
	6 URD 33 TTF 1600 **	Z300586			PC33UD60V1600TF
	6 URD 33 TTF 1800 **	A300587			PC33UD60V1800TF
	5,5 URD 33 TTF 2000 **	B300588			PC33UD55V2000TF
	5 URD 33 TTF 2250 **	K300757			PC33UD50V2250TF
4,5 URD 33 TTF 2500 **	L300758	PC33UD45V2500TF			

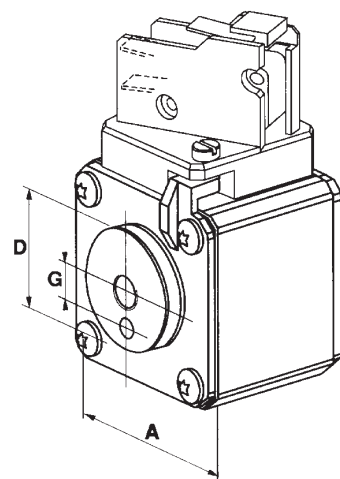

Note:
dimensions in mm
dimensions in inches

Threaded studs and microswitches
supplied separately
see microswitches PSC 3x & 7x and
Metric studs sections

Size	A	B	C	D	M*	N*	E±1	d	G±0.1	P
30	40 1-9/16"	46,5 1-27/32"	82 3-7/32"	26 1-1/64"	22	27	50,6 2"	M8	9 23/64"	6 15/64"
31	51 2"	56,5 2-7/32"	91 3-37/64"	30 1-3/16"	19	24	50,6 2"	M8	9 23/64"	9 23/64"
32	60 2-3/8"	65,5 2-37/64"	100 3-15/16"	38 ; (42mm **) 1-1/2" ; (1-21/32" **)	19	39	50,6 2"	M10	15 19/32"	9 23/64"
33	74,5 2-15/16"	79,5 3-1/8"	114 4-1/2"	46 ; (52mm **) 1-13/16" ; (2-1/16" **)	24	39	50,6 2"	M12	15 19/32"	9 23/64"




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC IEC Terminals French - 30 - 33 End contacts

Size	Designation					Reference Number	Weight (g)	Packaging	Catalog Number
2 x 32	6,9	URD	232	TTF	0800	T300305			PC232UD69V8CTF
	6,9	URD	232	TTF	1000	T300213			PC232UD69V10CTF
	6,9	URD	232	TTF	1250	V300214	1240		PC232UD69V13CTF
	6,9	URD	232	TTF	1400	G300087		1	PC232UD69V14CTF
	6,9	URD	232	TDF	1600	W300215			PC232UD69V16CTD
	6,9	URD	232	TDF	1800	X300216	3300		PC232UD69V18CTD
	6,9	URD	232	TDF	2000	Y300217			PC232UD69V20CTD
	5,5	URD	232	TDF	2200	D301993			PC232UD55V22CTD
2 x 33	6,9	URD	233	TTF	1000	B301186			PC233UD69V10CTF
	6,9	URD	233	TTF	1250	D300268			PC233UD69V13CTF
	6,9	URD	233	TTF	1400	E300269	1900		PC233UD69V14CTF
	6,9	URD	233	TTF	1600	F300270			PC233UD69V16CTF
	6,9	URD	233	PLAF	1800	B300427			PC36UD69V18CP11
	6	URD	233	PLAF	2000	R302235			PC36UD60V20CP11
	6	URD	233	PLAF	2200	O302234			PC36UD60V22CP11
	6	URD	233	PLAF	2500	P302233		1	PC36UD60V25CP11
	6	URD	233	PLAF	2800	N302232			PC36UD60V28CP11
	5,5	URD	233	PLAF	3000*	L301977			PC36UD55V30CP11
	5,5	URD	233	PLAF	3200*	M301978	2000		PC36UD55V32CP11
	5	URD	233	PLAF	3600*	N301979			PC36UD50V36CP11
	5	URD	233	PLAF	4000*	P301980			PC36UD50V40CP11
	4	URD	233	PLAF	4500*	O301981			PC36UD40V45CP11
4	URD	233	PLAF	5000*	R301982			PC36UD40V50CP11	


*Consult us

Size	A	B	C	D	E	F	G	H	J	K	d	e	L	M	N
2x32 TT	60	138,5	172	11	67,6	66,5	100	35	61	40	M 10	4	107,5	48	72
2x33 TT	74,5	167	200	13	67,6	81	114	50	80	40	M 12	4	107,5	54	86
2x32 TD	65,5	147	182	-	91,5	-	-	30	-	60	M 10	12	140	-	-
2x33 PLAF	75	171,5	207	-	55,5	-	115	40	-	71	M 10	15	81	-	-


TT

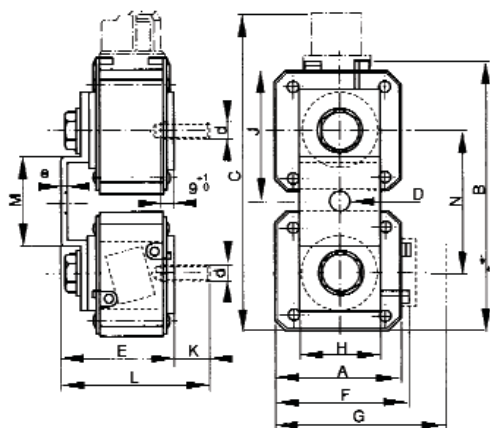

TD

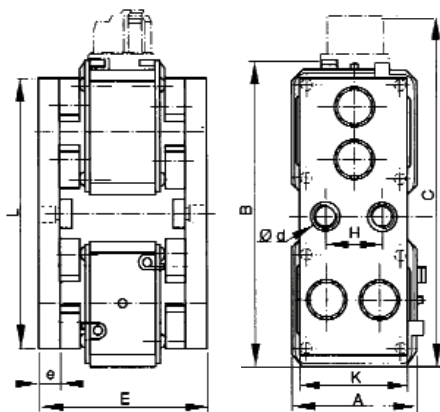

PLAF

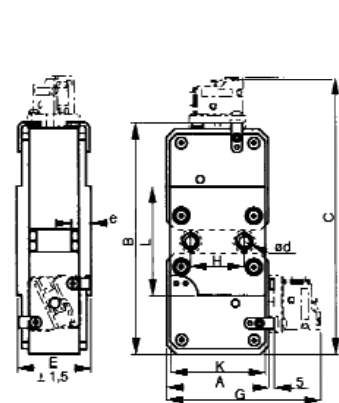


Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC IEC Terminals French - 30 - 33 End contacts

33 PPAF Standard Press-Pack

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
33	6,9 URD 33 PPAF 1250	D301855	910	3	PC33UD69V13CPP
	6,9 URD 33 PPAF 1400	E301856			PC33UD69V14CPP
	6 URD 33 PPAF 1600	G301927			PC33UD60V16CPP
2x33	6,9 URD 233 PPAF 1800	R300694	2450	1	PC36UD69V18CP12
	6 URD 233 PPAF 2000	H302250			PC36UD60V20CP12
	6 URD 233 PPAF 2200	K302252			PC36UD60V22CP13
	6 URD 233 PPAF 2500	M302254			PC36UD60V25CP12
	6 URD 233 PPAF 2800	L302253			PC36UD60V28CP13
	5,5 URD 233 PPAF 3000	to be given - contact us			to be given - contact us
	5,5 URD 233 PPAF 3200	V301985			PC36UD55V32CP12
	5,5 URD 233 PPAF 3600	to be given - contact us			to be given - contact us
	5 URD 233 PPAF 4000	X301987			PC36UD50V40CP12
	4,5 URD 233 PPAF 4500	to be given - contact us			to be given - contact us
	4 URD 233 PPAF 5000	M301932			PC36UD40V50CP12

Studs and microswitches supplied separately

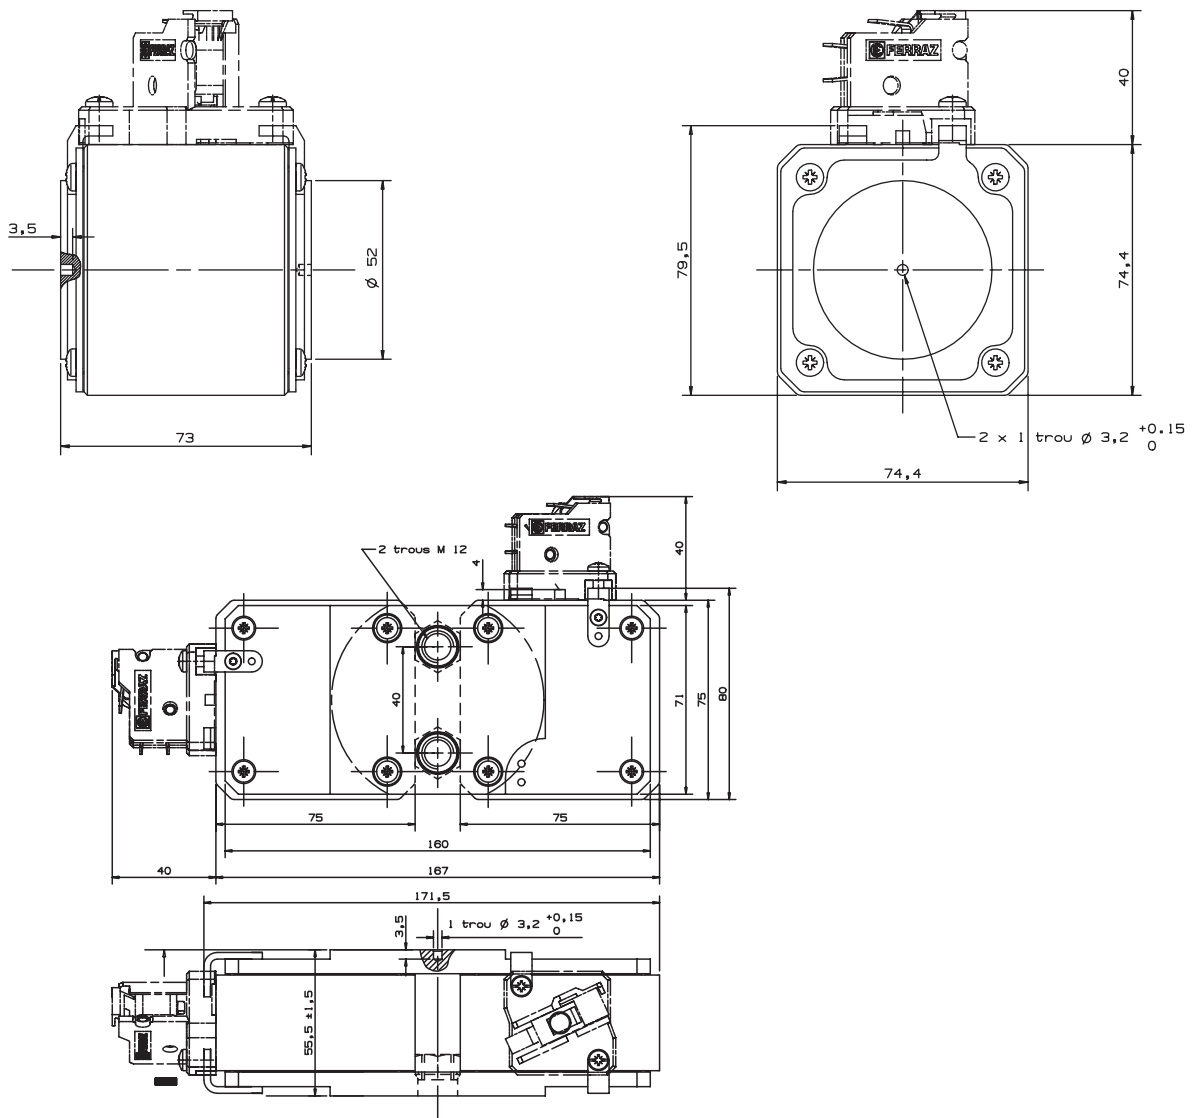




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

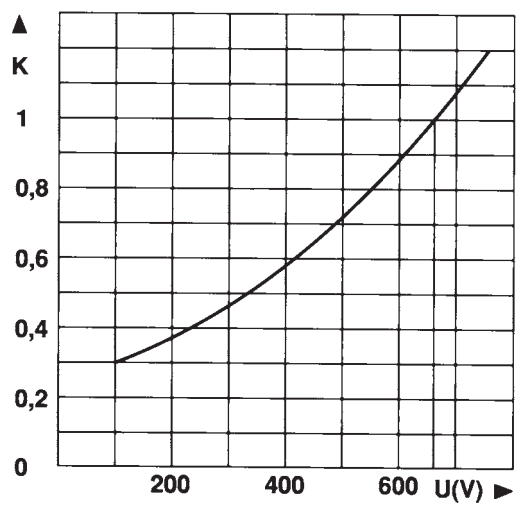

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

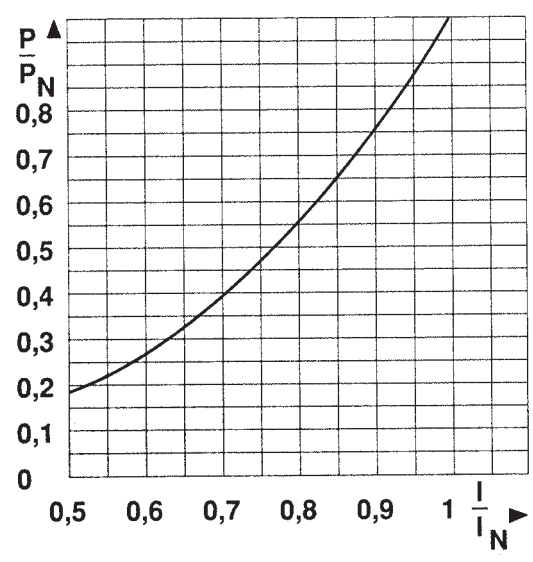

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

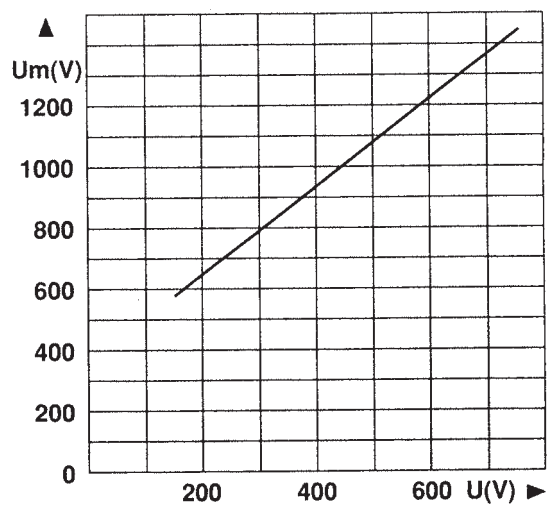


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

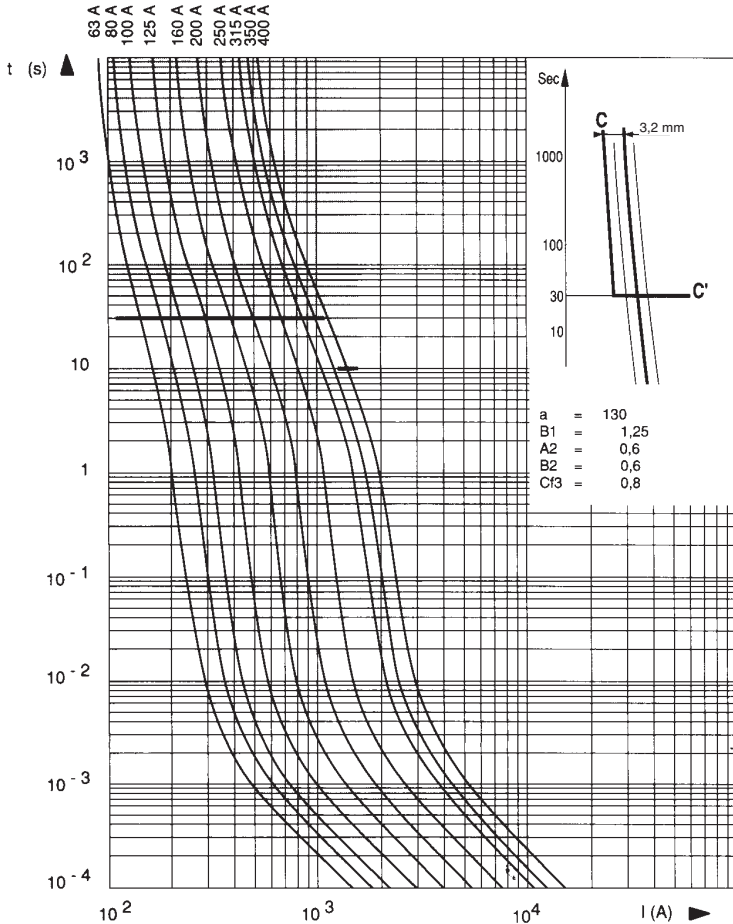

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

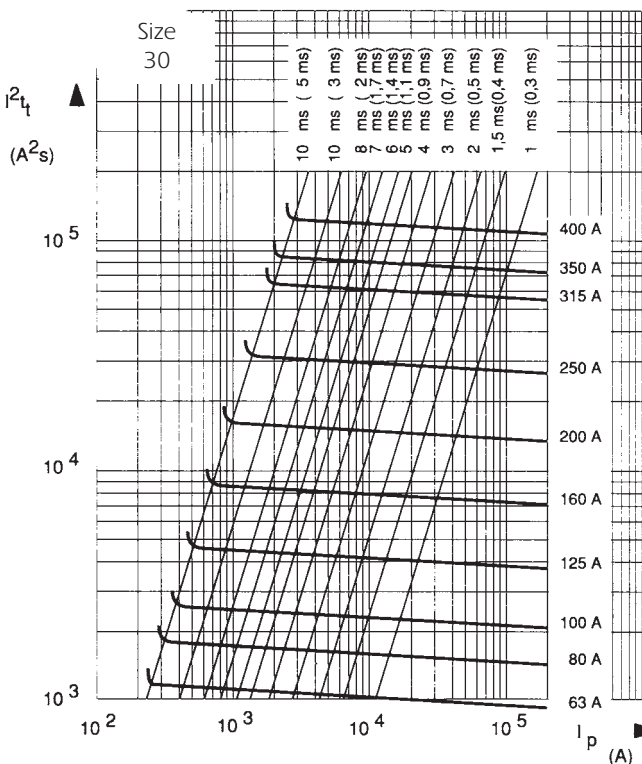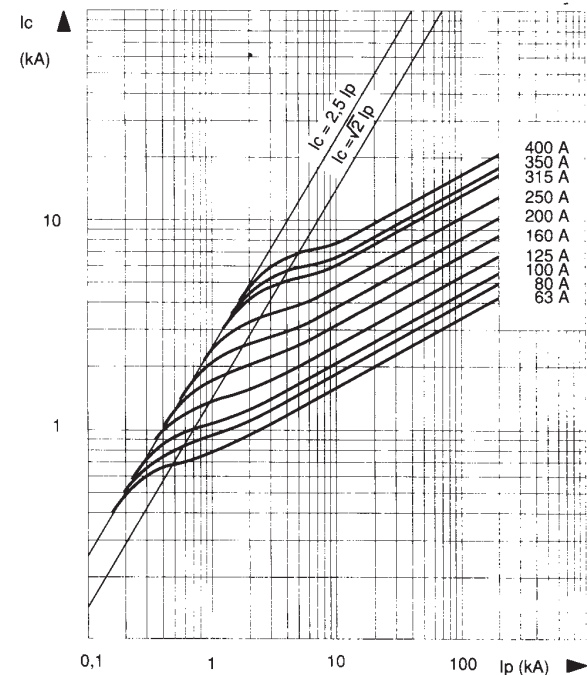

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

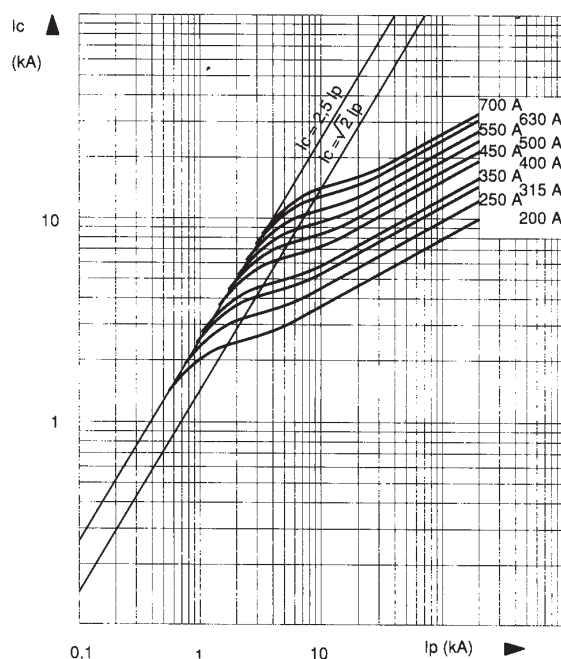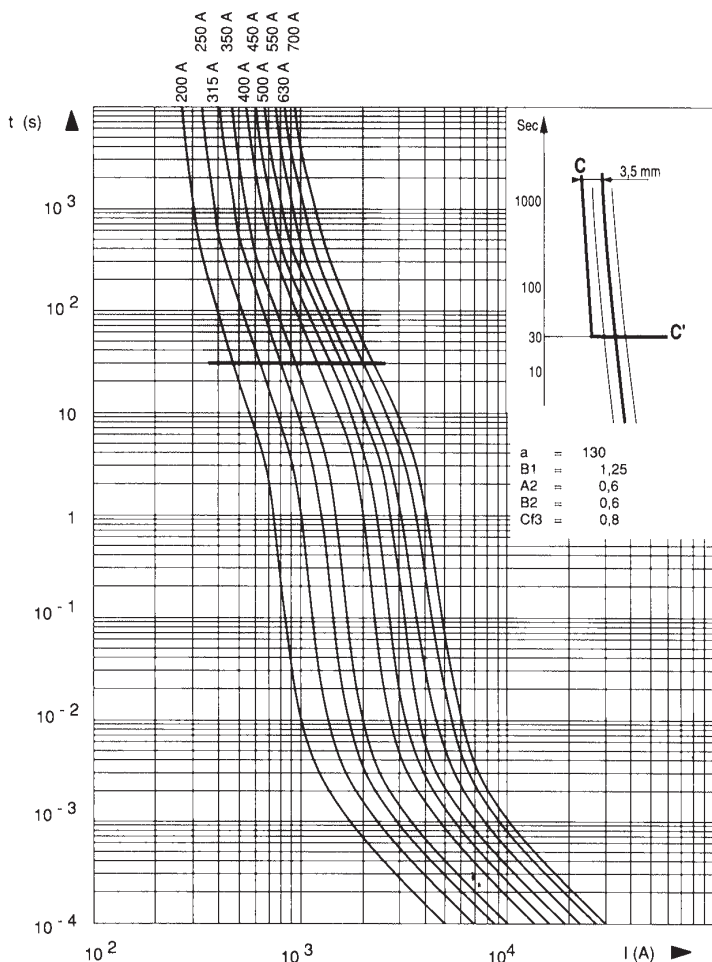


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

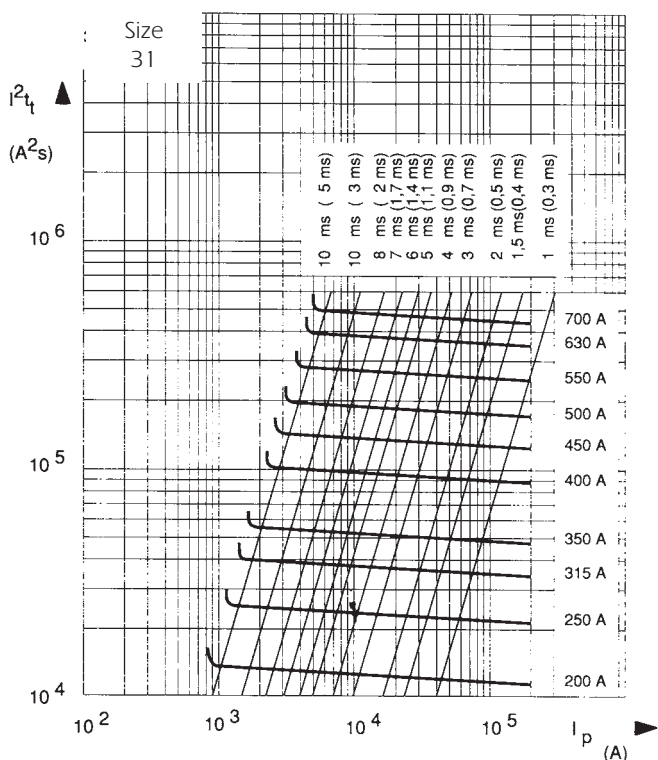





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

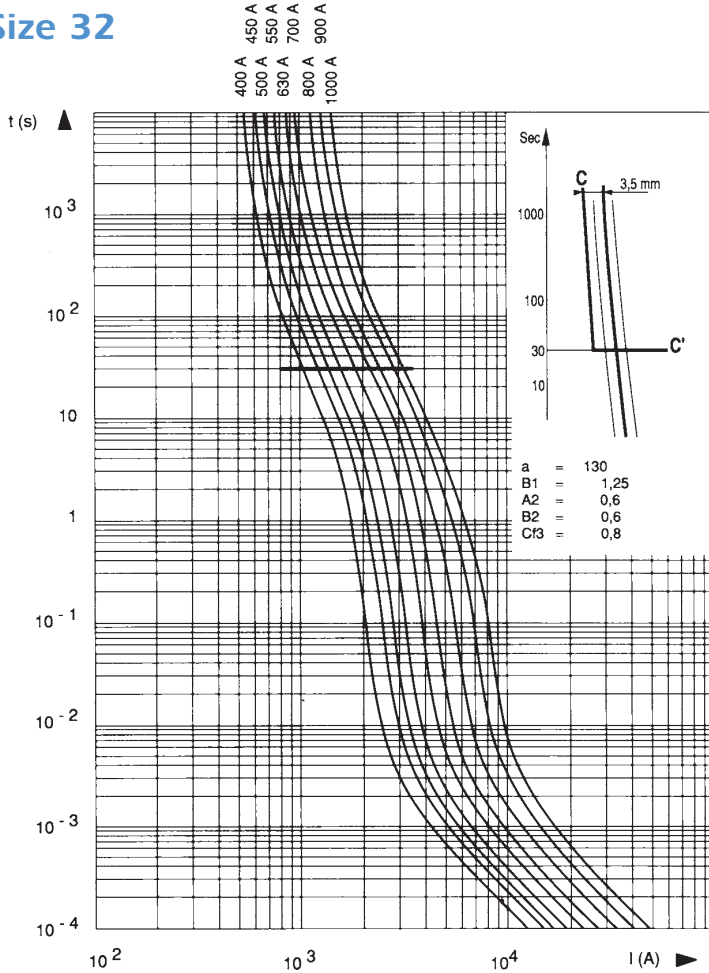

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_c that the current may reach as a function of the prospective fault current I_p .

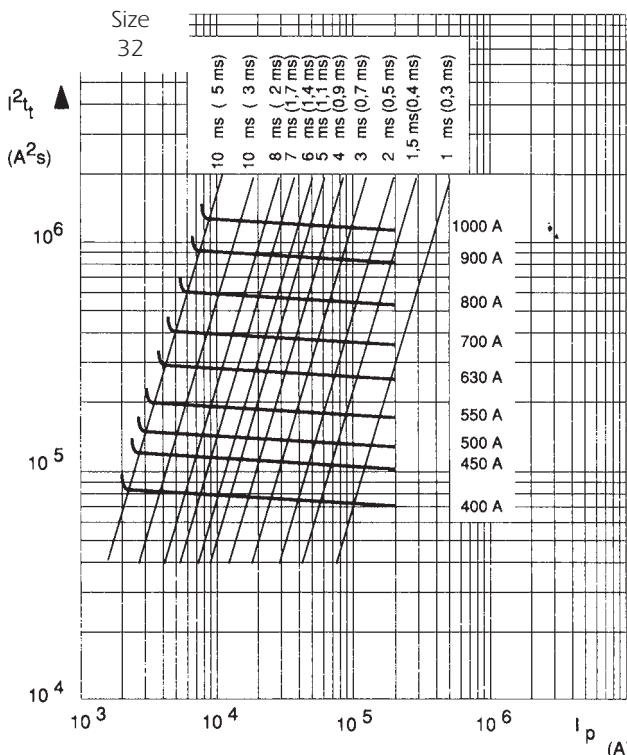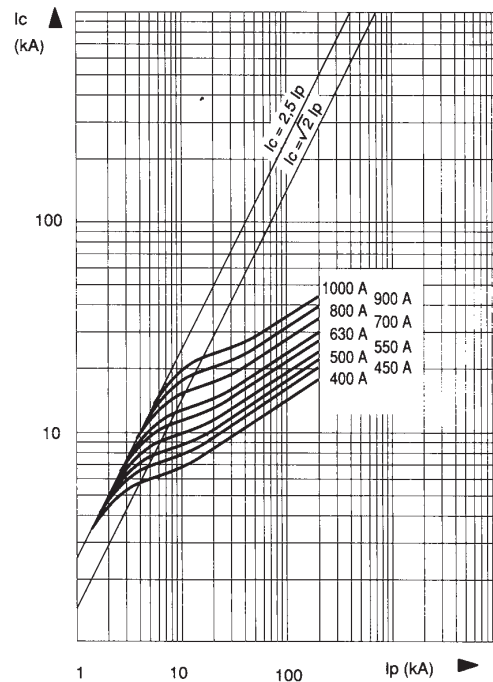

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

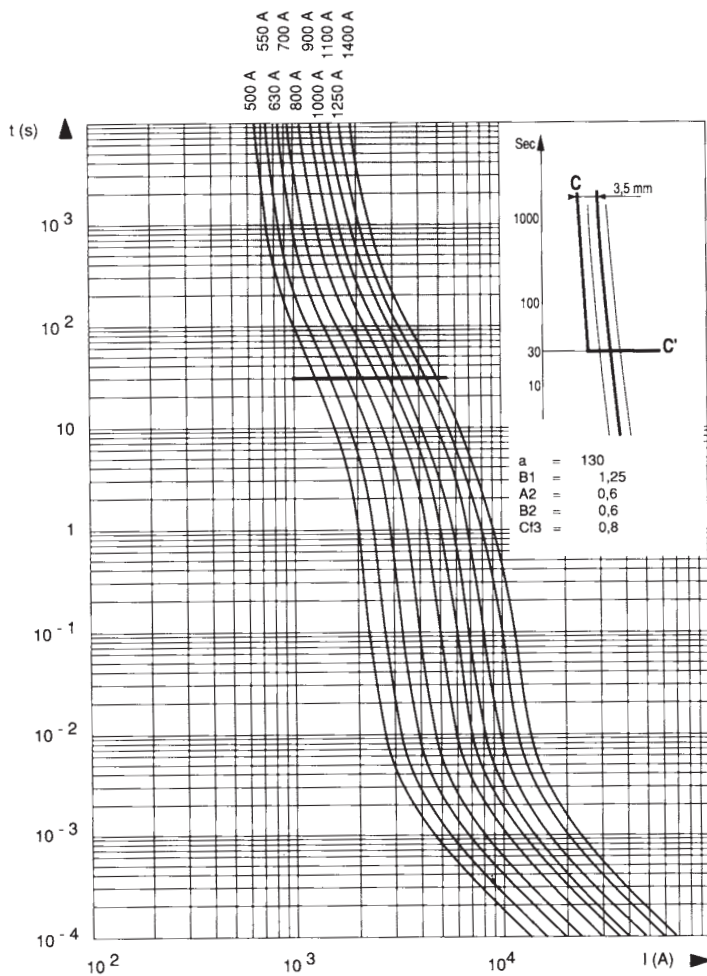

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

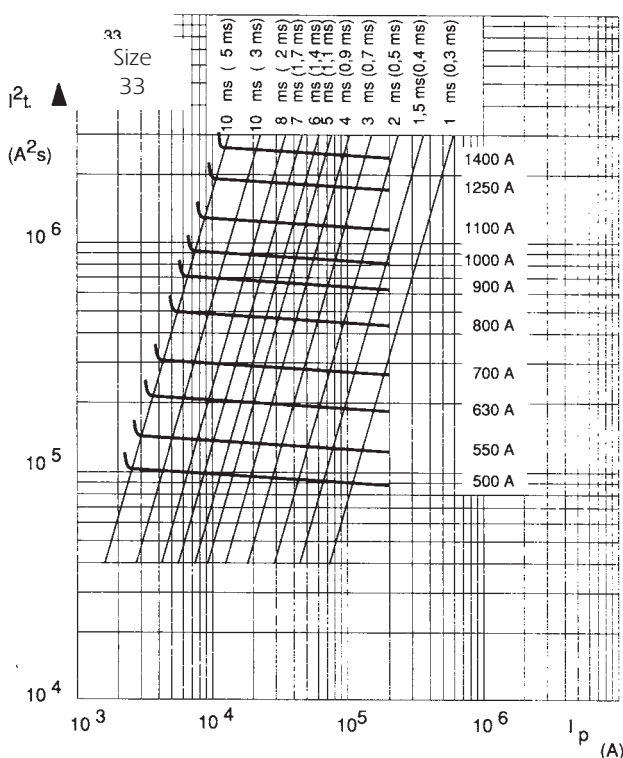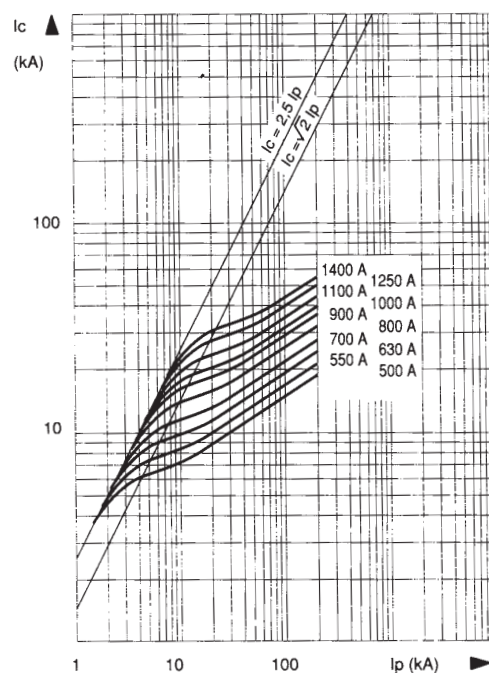

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I²t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

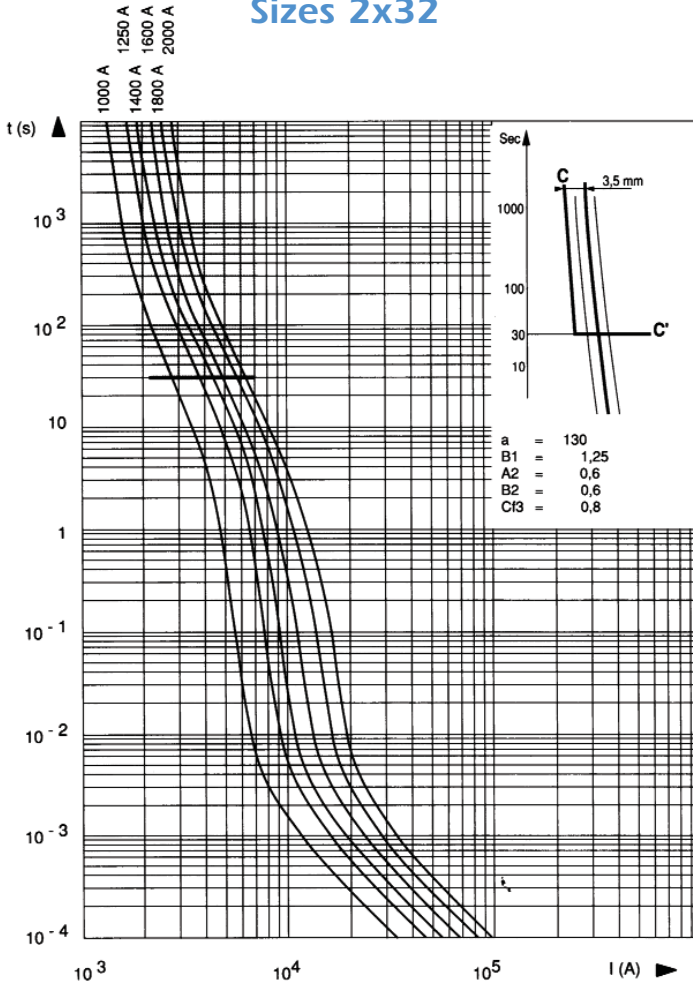

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

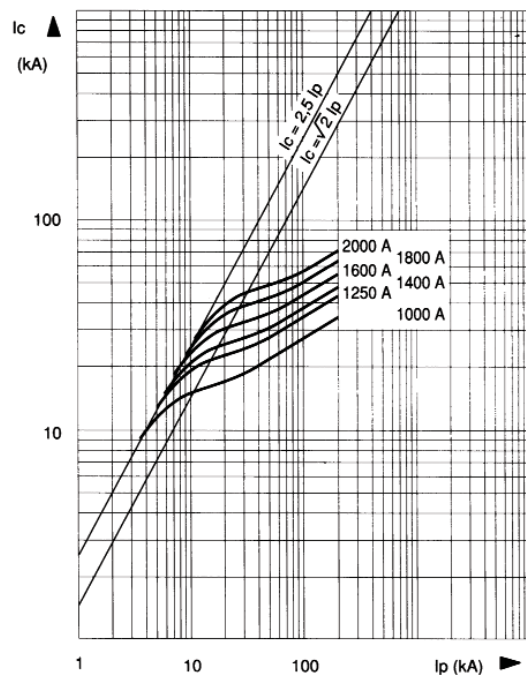

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

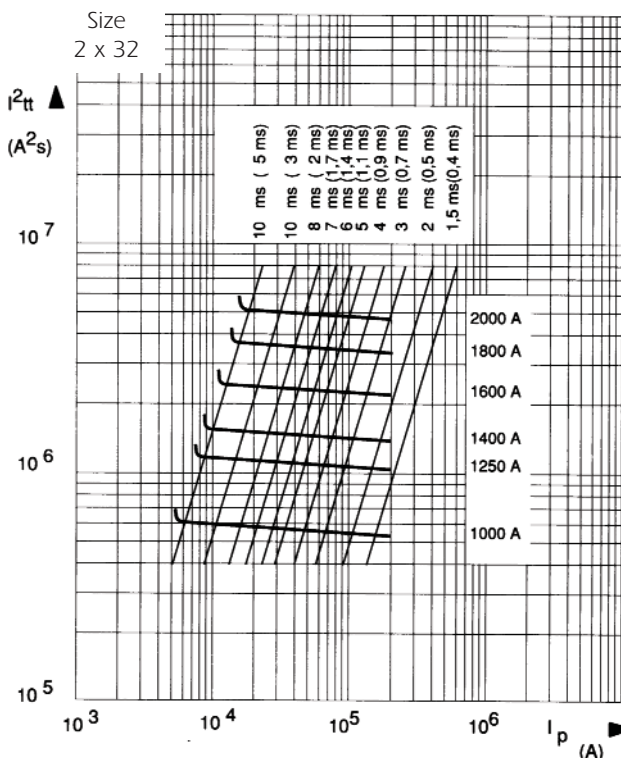

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

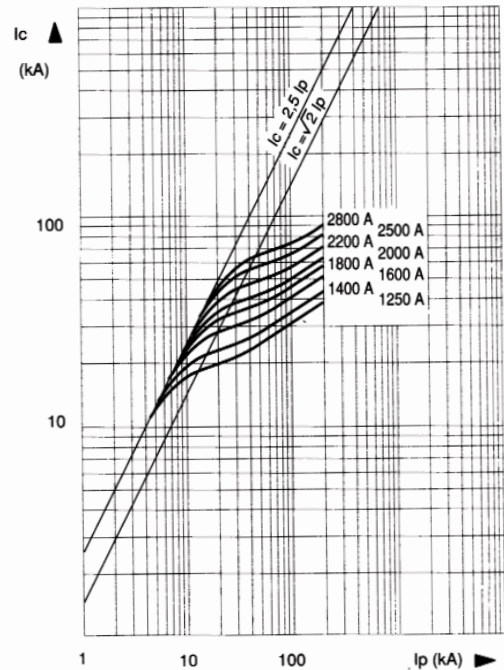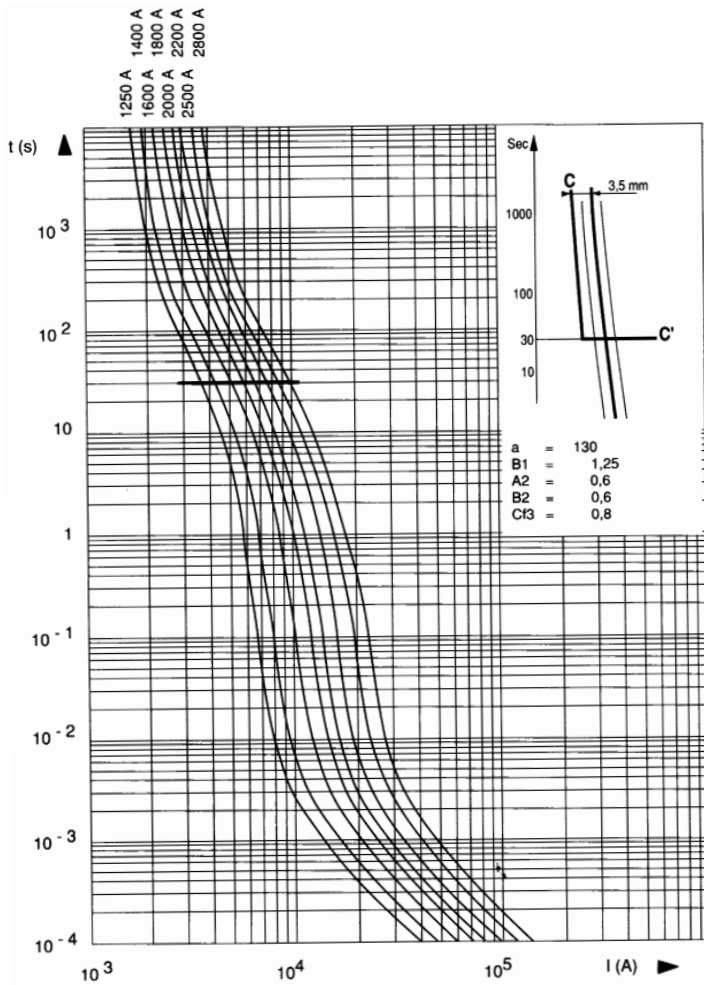

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

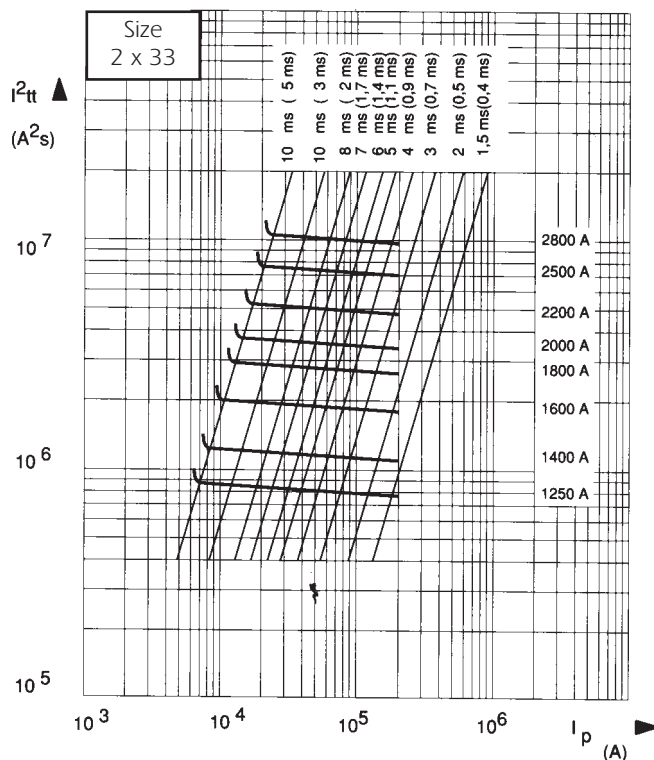

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

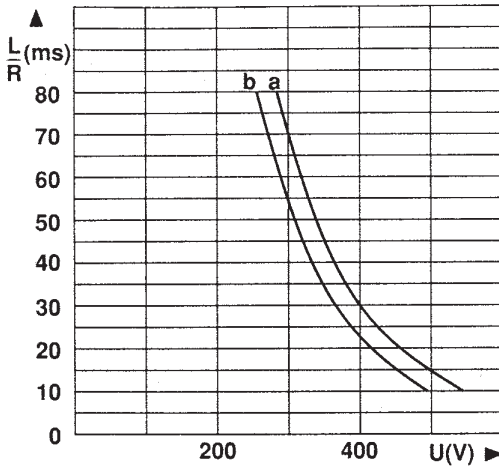

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

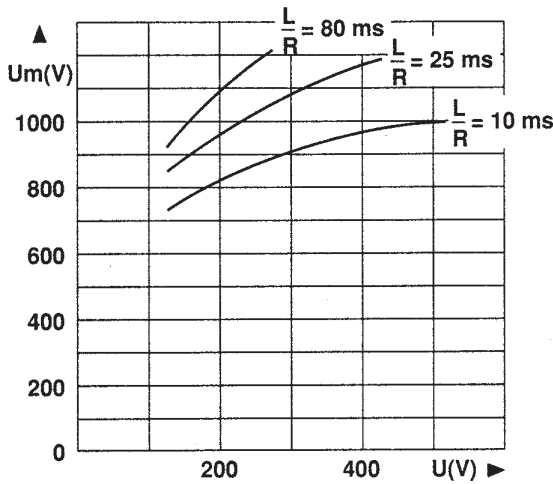

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

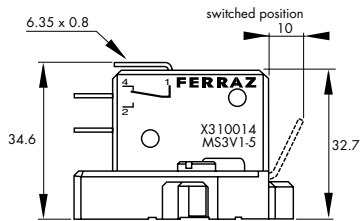


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

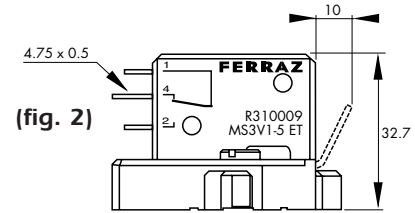


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

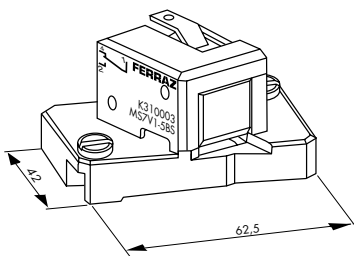

(fig. 5)

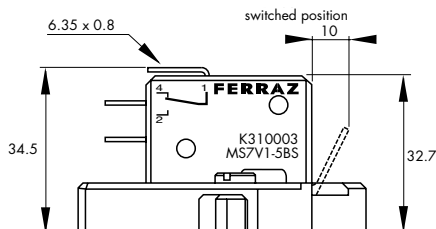


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

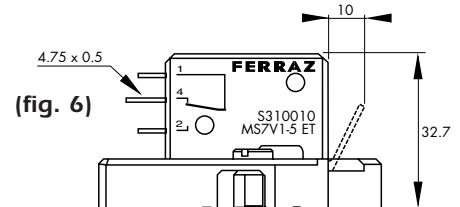



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA

Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
1100	270	1450(*)	140	165					
1250	410	1950(*)	150	180					
1400	555	2300(*)	160	200					
1600	870	3600(*)	165	205					
1800	1050	3700(*)	195	230					
32	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
33	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
			2000	950	5000	235	235		
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
			1800	530	2800	250	250		
			2000	700	3100(*)	280	280		
2200	950	4400(*)	280	280					
2500	1400	6600(*)	310	310					
2800	1900	8800(*)	330	330					
2X32	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
2x33	690	700	2000	950	5000	235	235	150(*)	150(*)
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
2x33	600	650	2000	700	3100(*)	280	280	160(*)	160(*)
			2200	950	4400(*)	280	280		
			2500	1400	6600(*)	310	310		
			2800	1900	8800(*)	330	330		

For others Ampere ratings consult us
12/04

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC IEC Terminals French - 30 - 33 Blades

Size	Designation	Reference Number	Weight (g)	Packaging	Base	I/I _N *	Catalog Number					
30	6,9 URD 30 E F 0050	R300372	290	3	SP30	0,95	PC30UD69V50EF					
	6,9 URD 30 E F 0063	H300088					PC30UD69V63EF					
	6,9 URD 30 E F 0080	J300089					PC30UD69V80EF					
	6,9 URD 30 E F 0100	K300090					PC30UD69V100EF					
	6,9 URD 30 E F 0125	L300091					PC30UD69V125EF					
	6,9 URD 30 E F 0160	M300092					PC30UD69V160EF					
	6,9 URD 30 E F 0200	N300093					PC30UD69V200EF					
	6,9 URD 30 E F 0250	P300094					PC30UD69V250EF					
	6,9 URD 30 E F 0315	O300095					PC30UD69V315EF					
	6,9 URD 30 E F 0350	R300096					PC30UD69V350EF					
	6,9 URD 30 E F 0400	S300097					PC30UD69V400EF					
	31	6,9 URD 31 E F 0160					B301922	430	3	SE31	0,95	PC31UD69V160EF
6,9 URD 31 E F 0200		C300037	PC31UD69V200EF									
6,9 URD 31 E F 0250		D300038	PC31UD69V250EF									
6,9 URD 31 E F 0315		E300039	PC31UD69V315EF									
6,9 URD 31 E F 0350		N300047	PC31UD69V350EF									
6,9 URD 31 E F 0400		F300040	PC31UD69V400EF									
6,9 URD 31 E F 0450		G300041	PC31UD69V450EF									
6,9 URD 31 E F 0500		H300042	PC31UD69V500EF									
6,9 URD 31 E F 0550		J300043	PC31UD69V550EF									
6,9 URD 31 E F 0630		K300044	PC31UD69V630EF									
6,9 URD 31 E F 0700		L300045	PC31UD69V700EF									
32		6,9 URD 32 E F 0400	V300168	590	3	SE32	0,95					PC32UD69V400EF
	6,9 URD 32 E F 0450	W300169	PC32UD69V450EF									
	6,9 URD 32 E F 0500	X300170	PC32UD69V500EF									
	6,9 URD 32 E F 0550	Y300171	PC32UD69V550EF									
	6,9 URD 32 E F 0630	Z300172	PC32UD69V630EF									
	6,9 URD 32 E F 0700	A300173	PC32UD69V700EF									
	6,9 URD 32 E F 0800	B300174	PC32UD69V800EF									
	6,9 URD 32 E F 0900	C300175	PC32UD69V900EF									
	6,9 URD 32 E F 1000	D300176	PC32UD69V1000EF									
	33	6,9 URD 33 E F 0500	Z300218					860	3	SF33	0,95	PC33UD69V500EF
		6,9 URD 33 E F 0550	A300219									PC33UD69V550EF
		6,9 URD 33 E F 0630	B300220									PC33UD69V630EF
6,9 URD 33 E F 0700		C300221	PC33UD69V700EF									
6,9 URD 33 E F 0800		D300222	PC33UD69V800EF									
6,9 URD 33 E F 0900		E300223	PC33UD69V900EF									
6,9 URD 33 E F 1000		F300224	PC33UD69V1000EF									
6,9 URD 33 E F 1100		G300225	PC33UD69V1100EF									
6,9 URD 33 E F 1250		H300226	PC33UD69V1250EF									
6,9 URD 33 E F 1400		J300227	PC33UD69V1400EF									



*I/I_N: Ratio "maximum continuous permissible RMS current I_N" for a fuse fitted into the bases.



Connections defined as per IEC 60269-1 and for a calm ambience of 30°C.

Use the pullout grip PM3 (T097675) for fuse sizes 30, 31, 32.

Fuse holders and microswitches supplied separately. (see Fuse Holders and microswitches PSC 3x & 7x sections)

Size	A	B	C	D	E ^{+1,1}	L	F	H	J	K	e
30	40	62	96	44,6	76,6	100	38	18	9	11	6
31	51	69	103	44,6	86,6	110	39	25	10,5	16	6
32	60	78	112	44,6	91	126	43	32	13	21,2	6
33	74,5	92,5	127	44,6	91	126	57	40	13	19,5	6

Dimensions in mm






Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

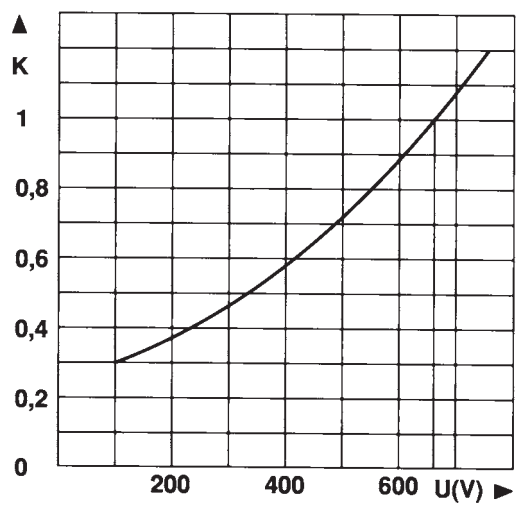

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

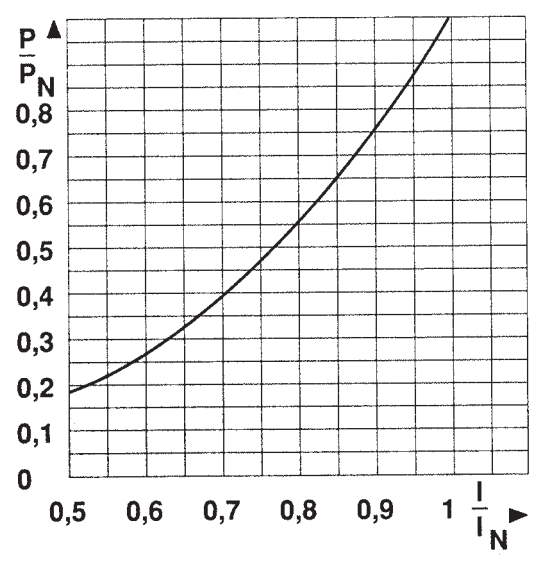

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

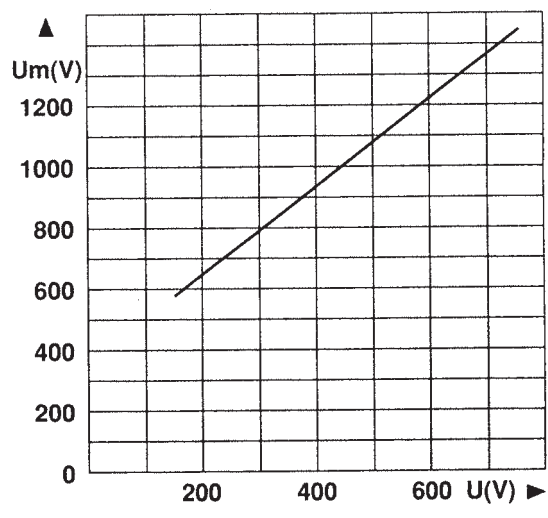


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

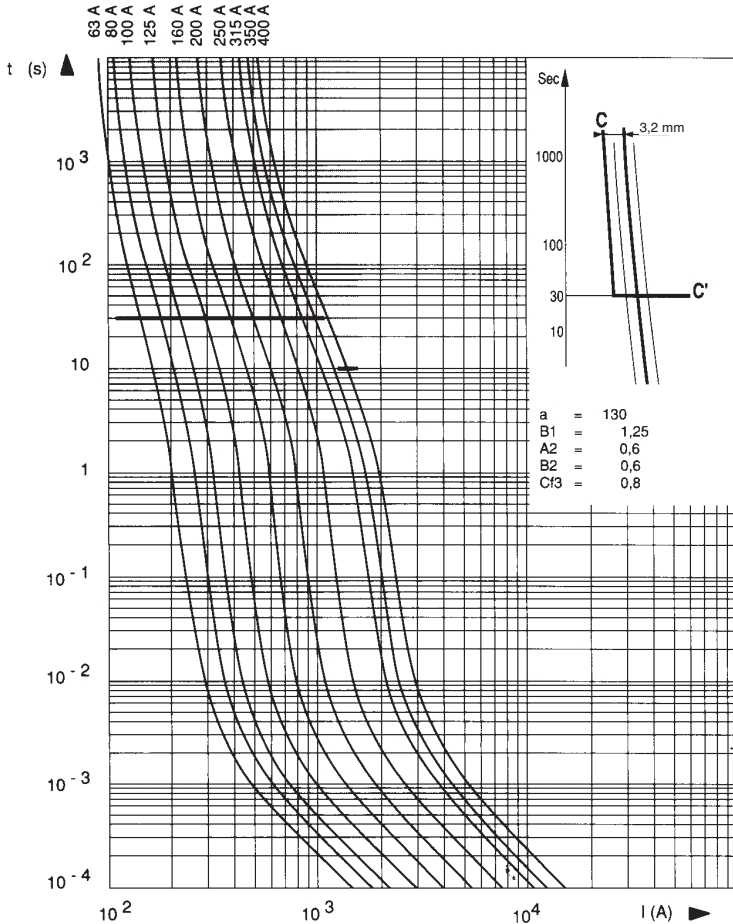

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

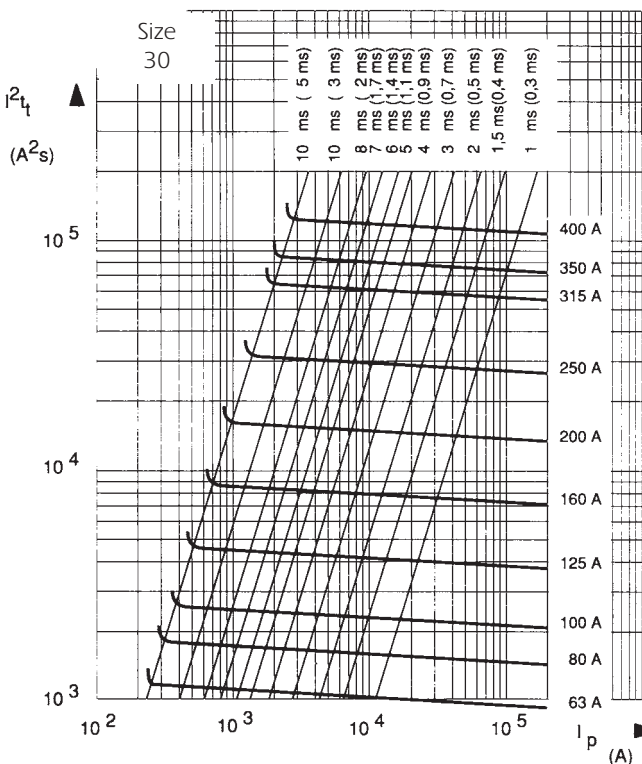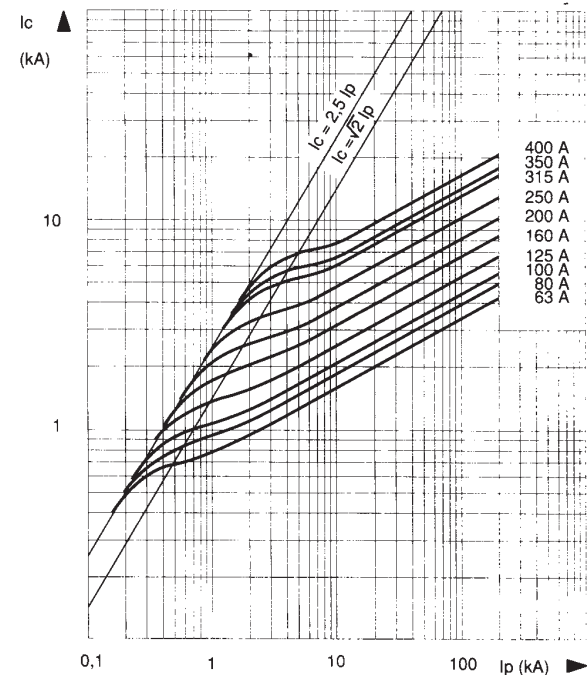

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

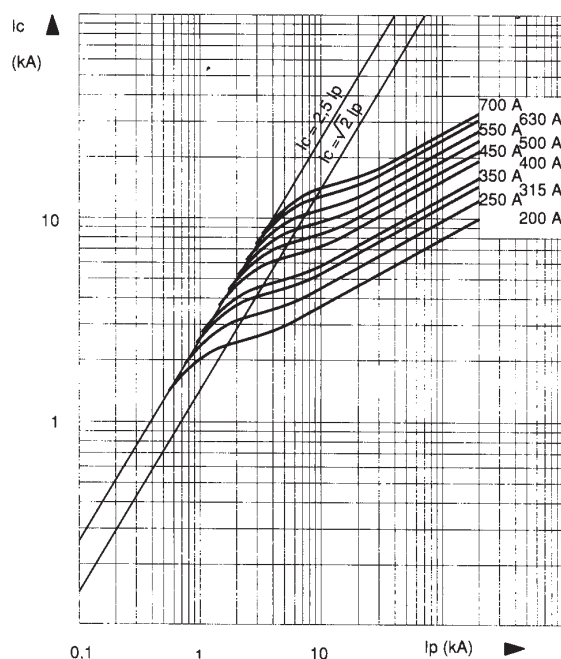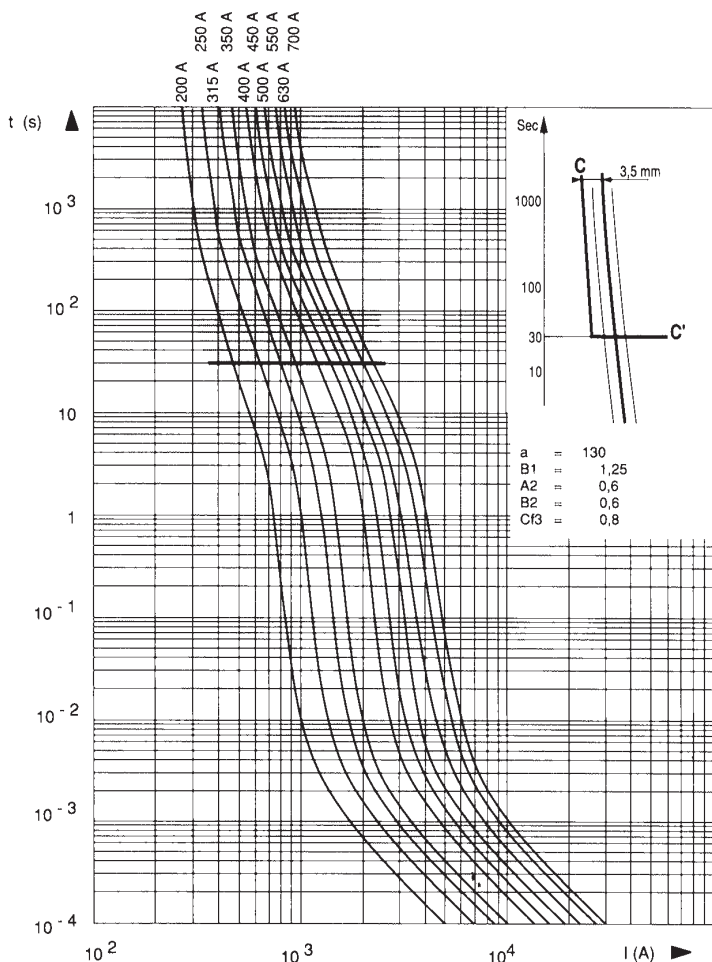


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

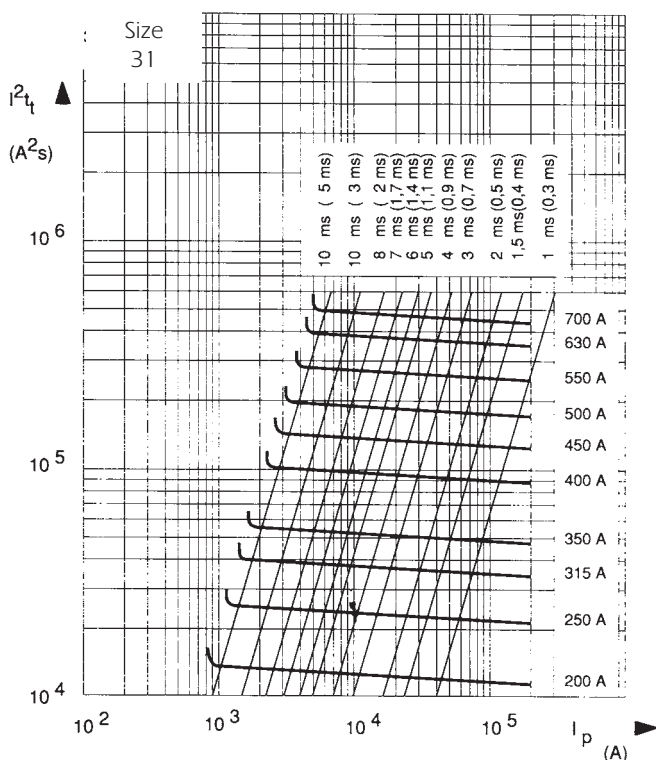





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

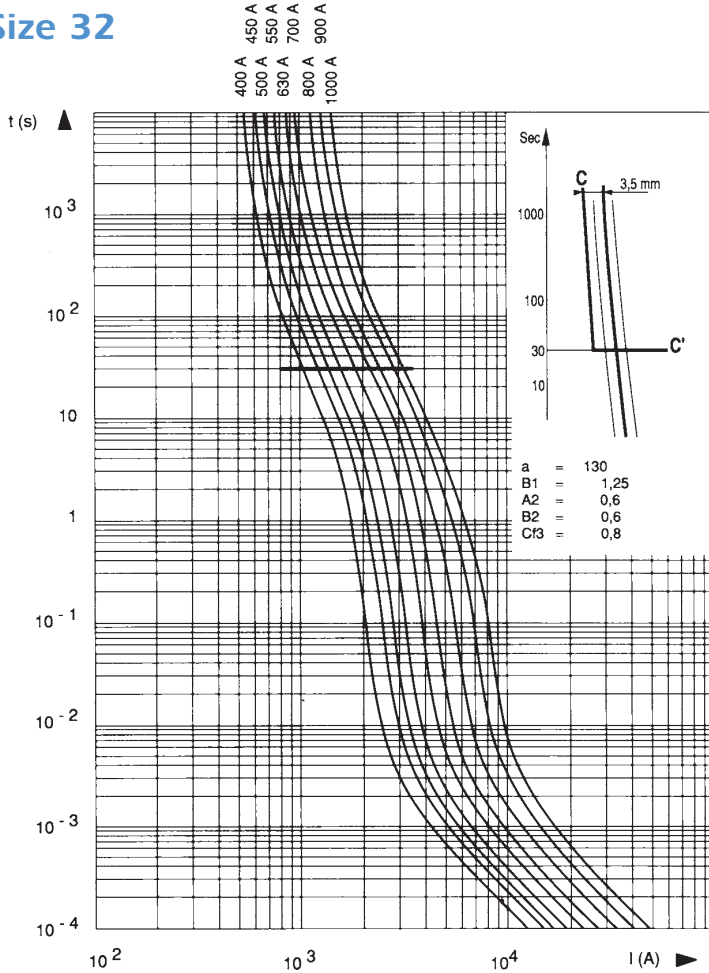

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

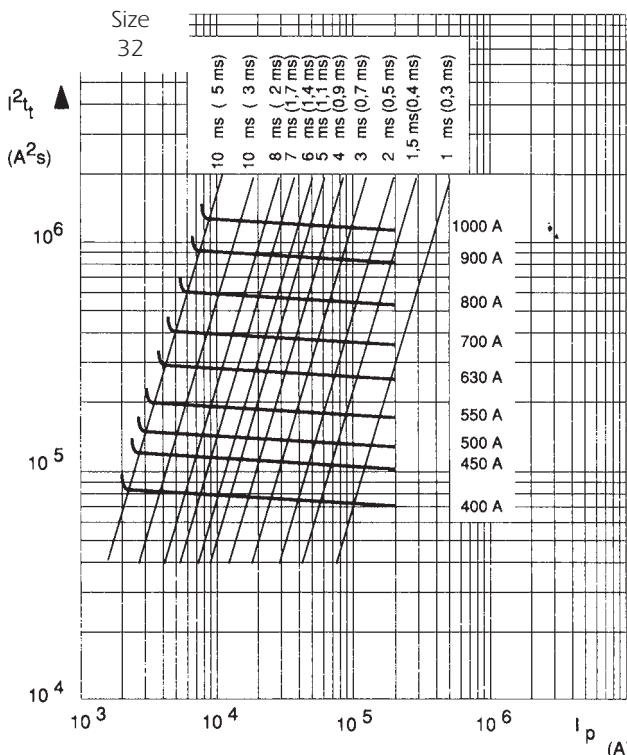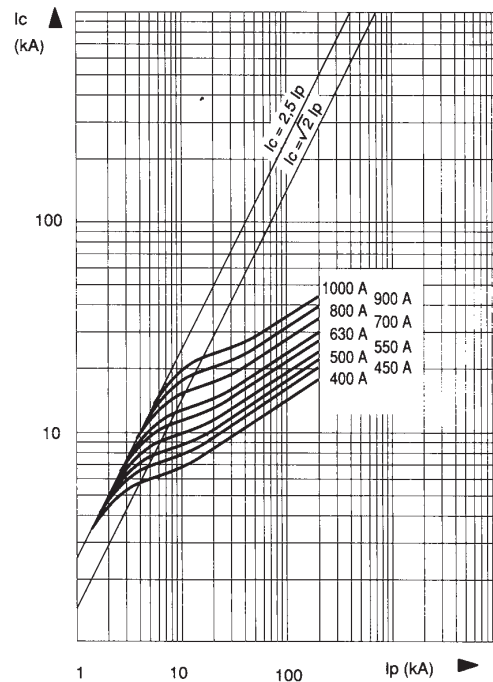

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

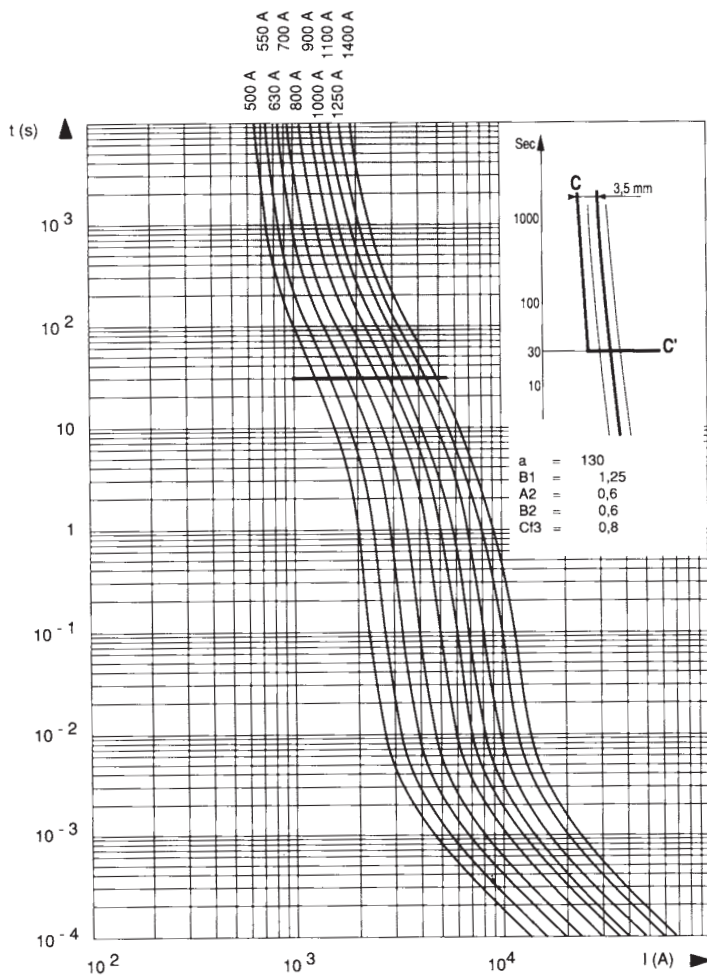

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

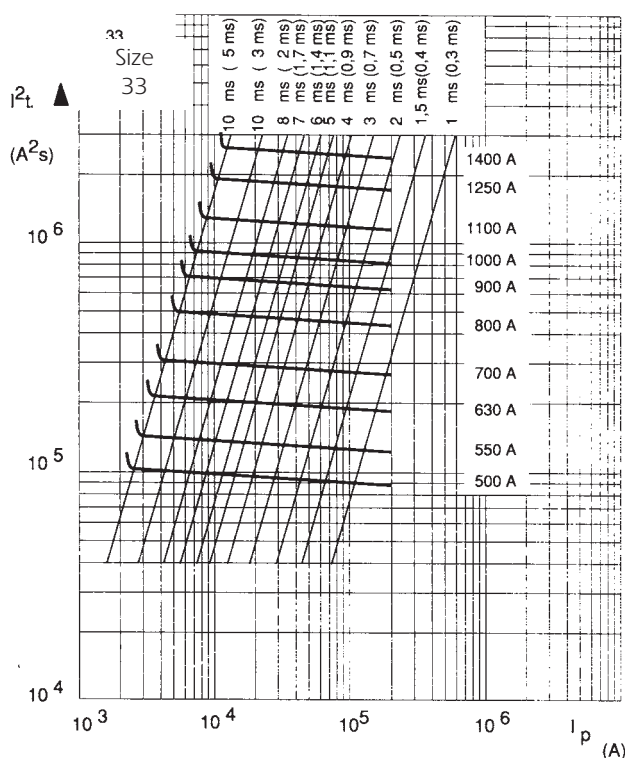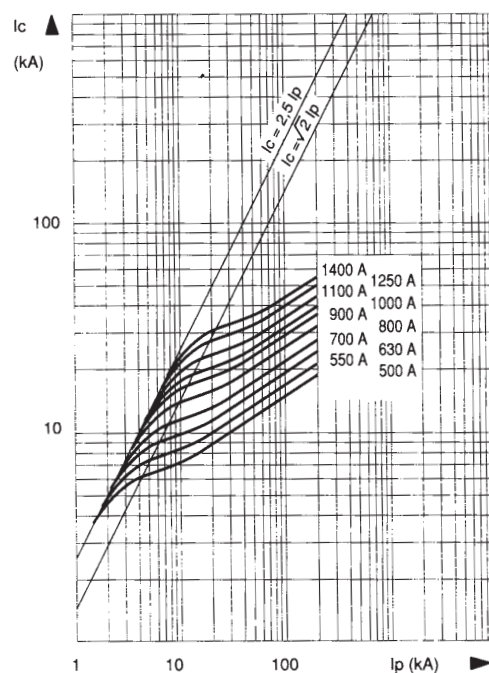

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

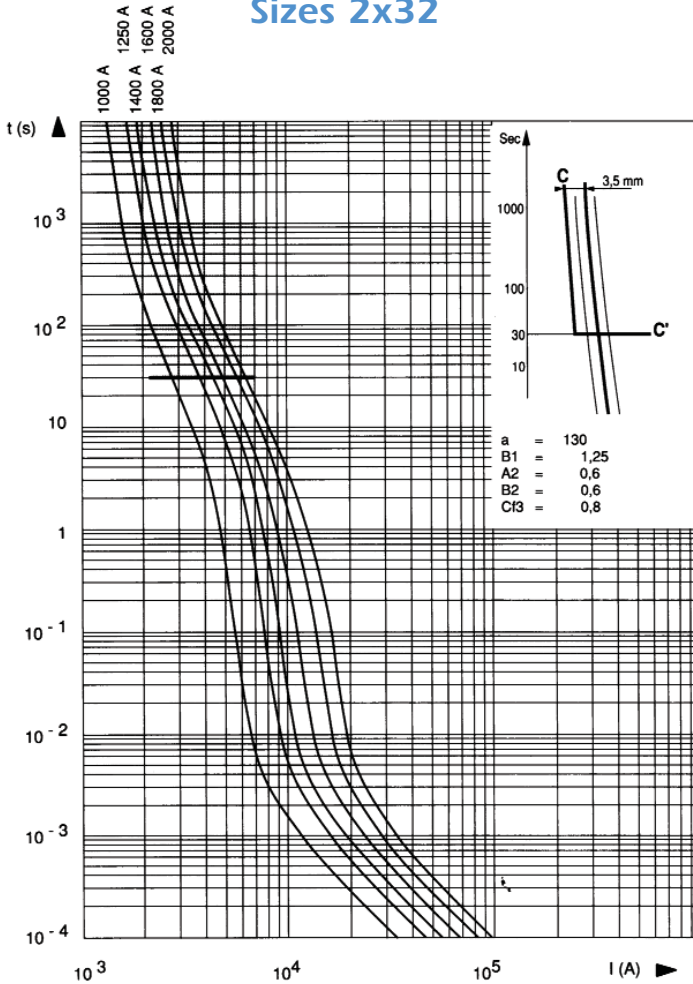

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

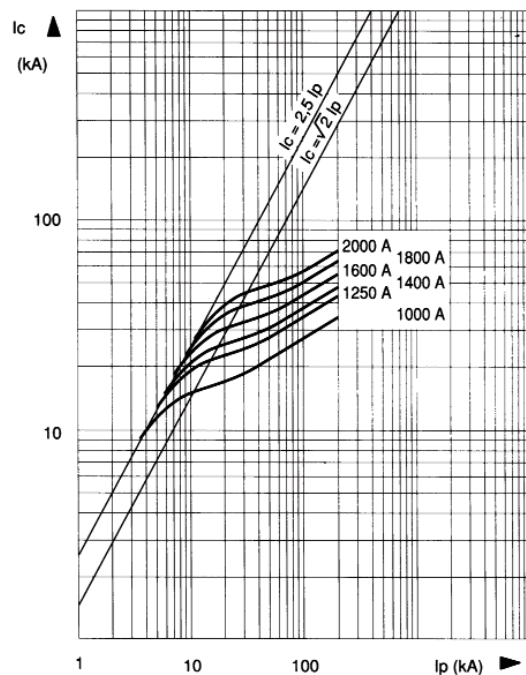

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

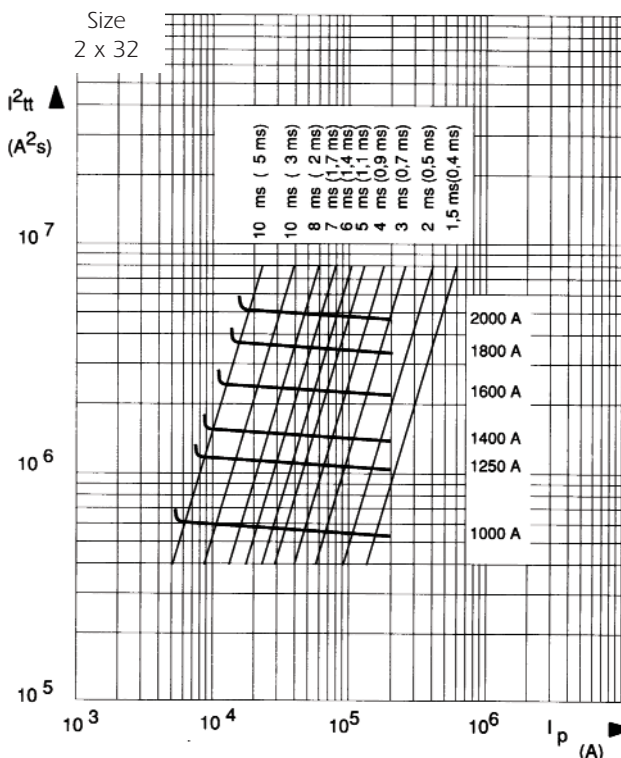

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

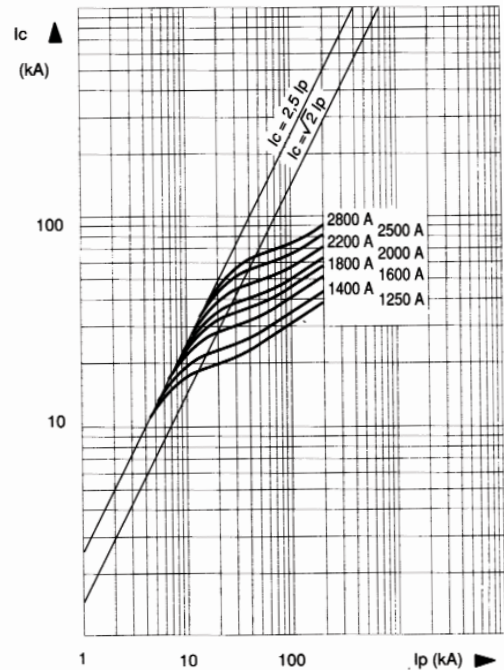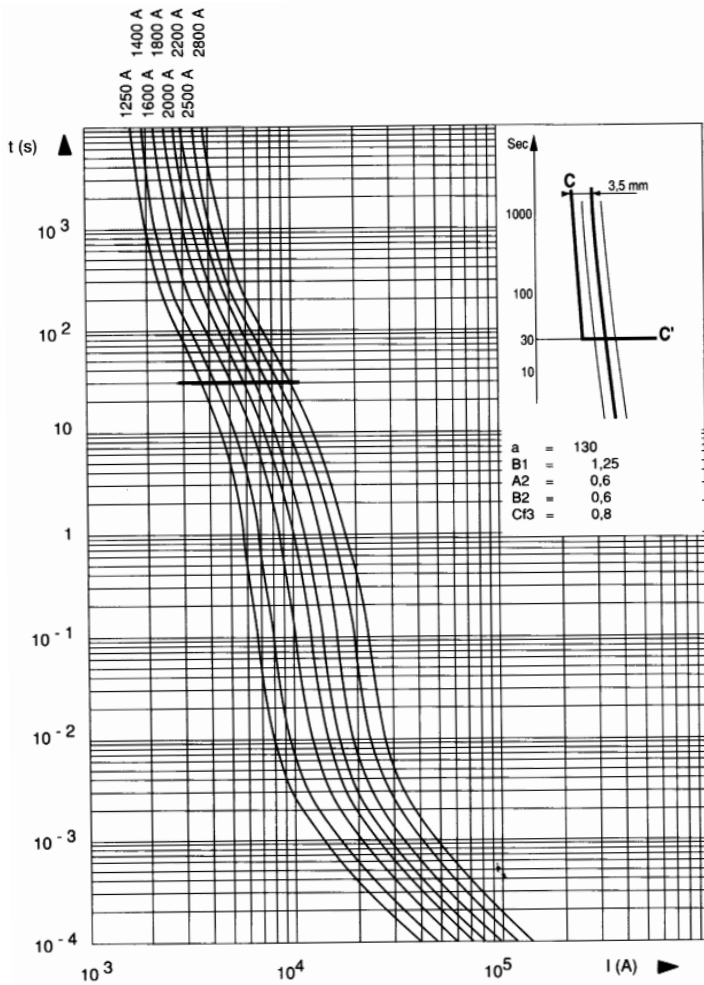

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

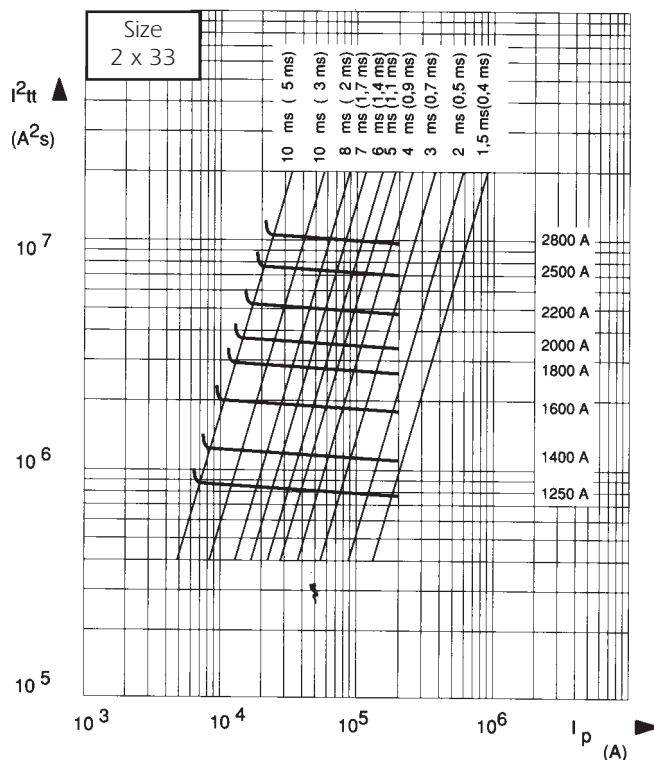

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

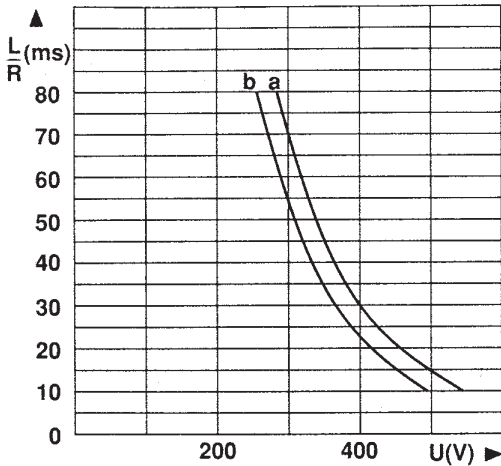

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

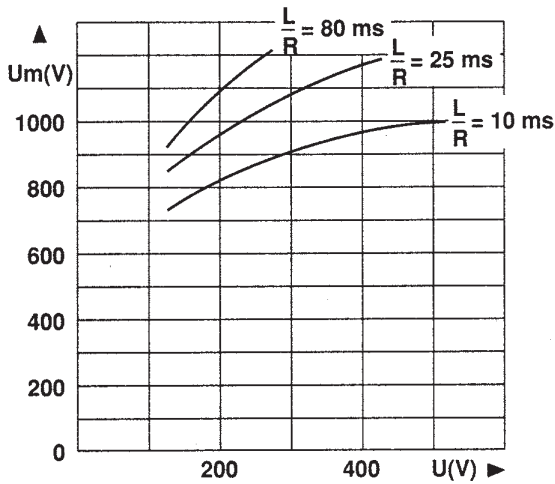

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

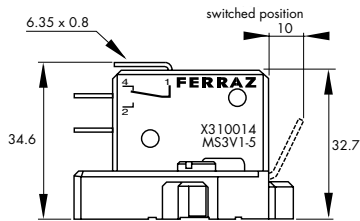


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

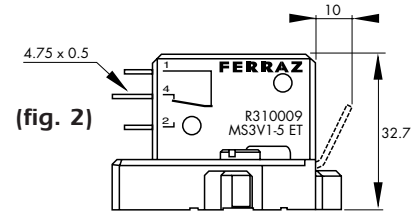


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

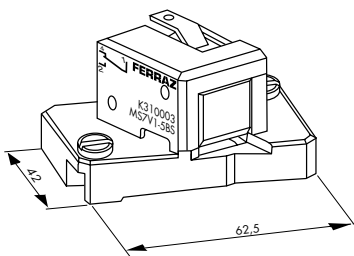

(fig. 5)

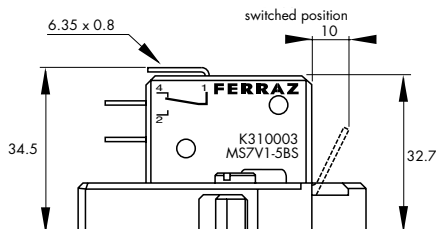


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

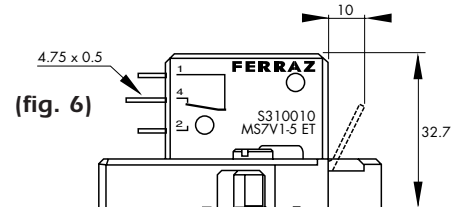



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

450 TO 700VAC / 63 TO 2800A

 Recognized

- Exceptionally low I^2t , Watt losses.
- Non-magnetic construction,
- Highly reliable low voltage
- Trip-indicator system, conformity to UL, IEC, DIN and VDE standards.
- Increased technical performance
 - Higher ratings
 - Reduction in volume and weight



This fuse preselection table indicates, for each size:

- rated current (or rating) I_n
- pre-arcing I^2t (I^2t_p) at 1 ms
- total operating I^2t (I^2t_t) at 660 V, $f=50\text{Hz}$ $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_n at the rated current I_n , and at $0.8 I_n$, in steady state
- breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.

Semiconductor (AC) fuses



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Main characteristics

Estimated breaking capacity: 300kA

Size	Nominal Voltage (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 660V (*) @ Un (kA ² s)	Power Pn (W)		Tested Breaking capacity (kA)	
	IEC	USA				End contact	Blades	IEC @ 690V (*) @ Un	USA @ 700V (*) @ Un
30	690	700	50	0,116	0,62	9	9	200	200
			63	0,2	1,1	14	14		
			80	0,33	1,8	19	19		
			100	0,47	2,5	26	26		
			125	0,85	4,5	30	30		
			160	1,6	8,5	37	37		
			200	3	15,5	42	43		
			250	5,8	30	48	50		
			315	12	62	53	55		
			350	15,5	80	57	60		
			400	23	120	60	65		
			450	26	150	80	88		
			500	41	240	80	88		
			550	52	300	80	90		
31	690	700	630	84	450(*)	85	95	200	200
			160	1,3	7	35	35		
			200	2,6	13,5	45	45		
			250	4,7	25	52	52		
			315	7,5	40	65	65		
			350	10,5	55	67	67		
			400	19	100	68	68		
			450	26,5	140	70	70		
			500	37	195	70	72		
			550	52	280	70	75		
			630	75	390	75	85		
			700	95	490	85	95		
			800	140	800	105	120		
			315	5,2	28,9	71	71		
350	8,9	48,8	71	74					
400	15	80	72	75					
450	22	115	77	80					
500	28	145	85	90					
550	37	195	90	95					
630	54	280	95	105					
700	76	400	100	110					
800	115	600	110	120					
900	170	900	110	125					
1000	240	1250	115	135					
1100	270	1450(*)	140	165					
1250	410	1950(*)	150	180					
1400	555	2300(*)	160	200					
1600	870	3600(*)	165	205					
1800	1050	3700(*)	195	230					
32	690	700	450	13,45	74,1	84	88	200	200
			500	19	100	105	105		
			550	27	140	105	110		
			630	40	210	110	120		
			700	55	300	115	125		
			800	95	490	120	130		
			900	135	700	120	135		
			1000	170	900	135	155		
			1100	240	1260	135	160		
			1250	350	1850	150	180		
			1400	480	2500	160	200		
			1500	500	2500(*)	210	240		
			1600	555	2900(*)	210	240		
			1800	720	3870(*)	225	260		
2000	950	4500(*)	250	290					
2250	1250	5160(*)	280	320					
2500	1870	6540(*)	280	330					
33	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
			2000	950	5000	235	235		
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
			1800	530	2800	250	250		
			2000	700	3100(*)	280	280		
2200	950	4400(*)	280	280					
2500	1400	6600(*)	310	310					
2800	1900	8800(*)	330	330					
2X32	690	700	800	60	320	144	144	200	200
			1000	110	590	165	165		
			1250	220	1100	190	190		
			1400	300	1600	200	200		
			1600	450	2400	220	220		
			1800	700	3500	225	225		
2x33	690	700	2000	950	5000	235	235	150(*)	150(*)
			2200	1100	5250(*)	280	280		
			1000	76	395	220	220		
			1250	160	850	230	230		
			1400	225	1200	240	240		
			1600	375	1900	250	250		
2x33	600	650	2000	700	3100(*)	280	280	160(*)	160(*)
			2200	950	4400(*)	280	280		
			2500	1400	6600(*)	310	310		
			2800	1900	8800(*)	330	330		

For others Ampere ratings consult us
12/04

Semiconductor (AC) fuses






Protistor® Square-body Fuses

PSC aR sizes 3x - 450V to 700 VAC

IEC Terminals German - 30 - 33 Blades (Din 80)

Size	Designation	Reference Number		Weight (g)	I/IN Base		Catalog Number DIN 80
		DIN 80			L98772 F98031	F98560 L91941	
30	6,9 URD 30 D08A 0050	F301926		290	1	1	PC30UD69V50A
	6,9 URD 30 D08A 0063	E300108			1	1	PC30UD69V63A
	6,9 URD 30 D08A 0080	F300109			1	1	PC30UD69V80A
	6,9 URD 30 D08A 0100	G300110			1	1	PC30UD69V100A
	6,9 URD 30 D08A 0125	H300111			1	1	PC30UD69V125A
	6,9 URD 30 D08A 0160	J300112			1	1	PC30UD69V160A
	6,9 URD 30 D08A 0200	K300113			1	1	PC30UD69V200A
	6,9 URD 30 D08A 0250	L300114			1	1	PC30UD69V250A
	6,9 URD 30 D08A 0315	M300115			1	1	PC30UD69V315A
	6,9 URD 30 D08A 0350	N300116			1	1	PC30UD69V350A
	6,9 URD 30 D08A 0400	P300117			1	1	PC30UD69V400A
	6,9 URD 30 D08A 0450	A300403			0,95	1	PC30UD69V450A
	6,9 URD 30 D08A 0500	B300404			0,95	1	PC30UD69V500A
	6,9 URD 30 D08A 0550	C300405			0,95	1	PC30UD69V550A
	31	6,9 URD 31 D08A 0160	M300322			430	1
6,9 URD 31 D08A 0200		Y300010		1	1		PC31UD69V200A
6,9 URD 31 D08A 0250		Z300011		1	1		PC31UD69V250A
6,9 URD 31 D08A 0315		A300012		1	1		PC31UD69V315A
6,9 URD 31 D08A 0350		Q300049		1	1		PC31UD69V350A
6,9 URD 31 D08A 0400		B300013		1	1		PC31UD69V400A
6,9 URD 31 D08A 0450		C300014		1	1		PC31UD69V450A
6,9 URD 31 D08A 0500		D300015		1	1		PC31UD69V500A
6,9 URD 31 D08A 0550		E300016		1	1		PC31UD69V550A
6,9 URD 31 D08A 0630		F300017		1	1		PC31UD69V630A
6,9 URD 31 D08A 0700		G300018		0,95	1		PC31UD69V700A
6,9 URD 31 D08A 0800		D300406		0,85	0,90		PC31UD69V800A
32	6,9 URD 32 D08A 0315	H302158		590	1	1	PC32UD69V315A
	6,9 URD 32 D08A 0350	K302160			1	1	PC32UD69V350A
	6,9 URD 32 D08A 0400	E300177			1	1	PC32UD69V400A
	6,9 URD 32 D08A 0450	F300178			1	1	PC32UD69V450A
	6,9 URD 32 D08A 0500	G300179			1	1	PC32UD69V500A
	6,9 URD 32 D08A 0550	H300180			0,95	1	PC32UD69V550A
	6,9 URD 32 D08A 0630	J300181			0,95	1	PC32UD69V630A
	6,9 URD 32 D08A 0700	K300182			0,90	1	PC32UD69V700A
	6,9 URD 32 D08A 0800	L300183			0,90	0,95	PC32UD69V800A
	6,9 URD 32 D08A 0900	M300184			0,90	0,95	PC32UD69V900A
	6,9 URD 32 D08A 1000	N300185			0,85	0,95	PC32UD69V1000A
	6 URD 32 D08A 1100	W302101			0,80	0,85	PC32UD60V1100A
5 URD 32 D08A 1250	G300409		0,80	0,85	PC32UD50V1250A		
33	6,9 URD 33 D08A 0450	T302168		860	0,95	1	PC33UD69V450A
	6,9 URD 33 D08A 0500	G300248			0,95	1	PC33UD69V500A
	6,9 URD 33 D08A 0550	H300249			0,90	1	PC33UD69V550A
	6,9 URD 33 D08A 0630	J300250			0,90	0,95	PC33UD69V630A
	6,9 URD 33 D08A 0700	K300251			0,90	0,95	PC33UD69V700A
	6,9 URD 33 D08A 0800	L300252			0,85	0,95	PC33UD69V800A
	6,9 URD 33 D08A 0900	M300253			0,85	0,95	PC33UD69V900A
	6,9 URD 33 D08A 1000	N300254			0,80	0,90	PC33UD69V1000A
	6,9 URD 33 D08A 1100	P300255			0,80	0,90	PC33UD69V1100A
	6,9 URD 33 D08A 1250	Q300256			0,75	0,85	PC33UD69V1250A
	6,9 URD 33 D08A 1400	R300257			0,75	0,80	PC33UD69V1400A
	6 URD 33 D08A 1600	X301803			0,70	0,75	PC33UD60V1600A

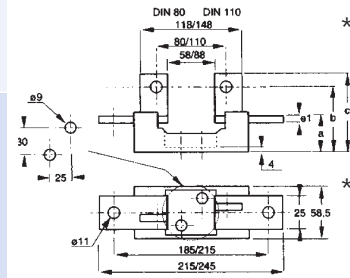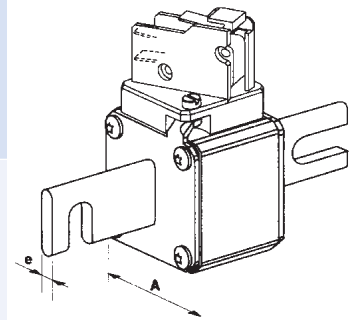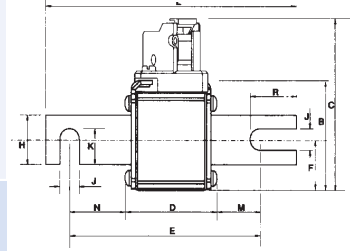

Fuse holders and microswitches supplied separately (see page , and Fuse Blocks and Fuse Holders section)

Dimensions in mm

Fuse Size	A	B	C	D	E	F	G	H	J	K	d	e	L	M
30 DIN 80	40	46,5	82	47,5	77	21	25	10,5	17,7	110	11,5	18,5	25,2	6
31 DIN 80	51	56,5	91	47,5	77	25,5	25	10,5	17,7	110	11,5	18,5	25,2	6
32 DIN 80	60	65,5	100	47,5	77	30	32	10,5	21,2	110	11,5	18,5	25,2	6
33 DIN 80	74,5	79,5	114	48,5	77	37,2	40	10,5	25,2	110	11	18	25,2	6




Fuse holders	Ref. Number	a	b	c	e1	x	y	Weight (g) *
SI DIN 80 630 A	L098772	40	68	82	5	185	215	660
SI DIN 80 1250 A	F098560	45	73	87	10	185	215	890

Use the pullout grip PM3 (T097675) for fuse sizes 30, 31, 32

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC IEC Terminals German - 30 - 33 Blades (Din110)

Size	Designation	Reference Number		Weight (g)	I/IN Base		Catalog Number DIN 110
		DIN 110			L98772 F98031	F98560 L91941	
30	6,9 URD 30 D11A 0050	G301191		290	1	1	PC30UD69V50D1A
	6,9 URD 30 D11A 0063	Q300118			1	1	PC30UD69V63D1A
	6,9 URD 30 D11A 0080	R300119			1	1	PC30UD69V80D1A
	6,9 URD 30 D11A 0100	S300120			1	1	PC30UD69V100D1A
	6,9 URD 30 D11A 0125	T300121			1	1	PC30UD69V125D1A
	6,9 URD 30 D11A 0160	V300122			1	1	PC30UD69V160D1A
	6,9 URD 30 D11A 0200	W300123			1	1	PC30UD69V200D1A
	6,9 URD 30 D11A 0250	X300124			1	1	PC30UD69V250D1A
	6,9 URD 30 D11A 0315	Y300125			1	1	PC30UD69V315D1A
	6,9 URD 30 D11A 0350	Z300126			1	1	PC30UD69V350D1A
	6,9 URD 30 D11A 0400	A300127			1	1	PC30UD69V400D1A
	6,9 URD 30 D11A 0450	S300695			0,95	1	PC30UD69V450D1A
	6,9 URD 30 D11A 0500	Y301091			0,95	1	PC30UD69V500D1A
	6,9 URD 30 D11A 0550	Z301092			0,95	1	PC30UD69V550D1A
31	6,9 URD 31 D11A 0160	-		430	1	1	PC31UD69V200D1A
	6,9 URD 31 D11A 0200	H300019			1	1	PC31UD69V250D1A
	6,9 URD 31 D11A 0250	J300020			1	1	PC31UD69V315D1A
	6,9 URD 31 D11A 0315	K300021			1	1	PC31UD69V350D1A
	6,9 URD 31 D11A 0350	P300048			1	1	PC31UD69V400D1A
	6,9 URD 31 D11A 0400	L300022			1	1	PC31UD69V450D1A
	6,9 URD 31 D11A 0450	M300023			1	1	PC31UD69V500D1A
	6,9 URD 31 D11A 0500	N300024			1	1	PC31UD69V550D1A
	6,9 URD 31 D11A 0550	P300025			1	1	PC31UD69V630D1A
	6,9 URD 31 D11A 0630	Q300026			1	1	PC31UD69V700D1A
	6,9 URD 31 D11A 0700	R300027			0,95	1	PC31UD69V800D1A
	6,9 URD 31 D11A 0800	H300079			0,85	0,90	PC31UD69V800D1A
32	6,9 URD 32 D11A 0315	K302160		590	1	1	PC32UD69V350D1A
	6,9 URD 32 D11A 0350	L302161			1	1	PC32UD69V400D1A
	6,9 URD 32 D11A 0400	P300186			1	1	PC32UD69V450D1A
	6,9 URD 32 D11A 0450	Q300187			1	1	PC32UD69V500D1A
	6,9 URD 32 D11A 0500	R300188			1	1	PC32UD69V550D1A
	6,9 URD 32 D11A 0550	S300189			0,95	1	PC32UD69V630D1A
	6,9 URD 32 D11A 0630	T300190			0,95	1	PC32UD69V700D1A
	6,9 URD 32 D11A 0700	V300191			0,90	1	PC32UD69V800D1A
	6,9 URD 32 D11A 0800	W300192			0,90	0,95	PC32UD69V800D1A
	6,9 URD 32 D11A 0900	X300193			0,90	0,95	PC32UD69V900D1A
	6,9 URD 32 D11A 1000	Y300194			0,85	0,95	PC32UD69V10CD1A
	6 URD 32 D11A 1100	-			0,80	0,85	
5 URD 32 D11A 1250	-		0,80	0,85			
33	6,9 URD 33 D11A 0450	V302169		860	0,95	1	PC33UD69V450D1A
	6,9 URD 33 D11A 0500	S300258			0,95	1	PC33UD69V500D1A
	6,9 URD 33 D11A 0550	T300259			0,90	1	PC33UD69V550D1A
	6,9 URD 33 D11A 0630	V300260			0,90	0,95	PC33UD69V630D1A
	6,9 URD 33 D11A 0700	W300261			0,90	0,95	PC33UD69V700D1A
	6,9 URD 33 D11A 0800	X300262			0,85	0,95	PC33UD69V800D1A
	6,9 URD 33 D11A 0900	Y300263			0,85	0,95	PC33UD69V900D1A
	6,9 URD 33 D11A 1000	Z300264			0,80	0,90	PC33UD69V10CD1A
	6,9 URD 33 D11A 1100	A300265			0,80	0,90	PC33UD69V11CD1A
	6,9 URD 33 D11A 1250	B300266			0,75	0,85	PC33UD69V12CD1A
	6,9 URD 33 D11A 1400	C300267			0,75	0,80	PC33UD69V14CD1A
	6 URD 33 D11A 1600	Z301437			0,70	0,75	PC33UD60V16CD1A

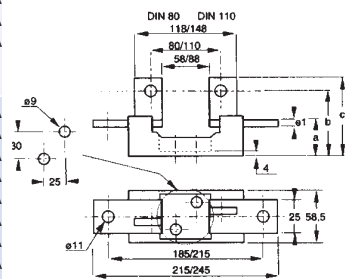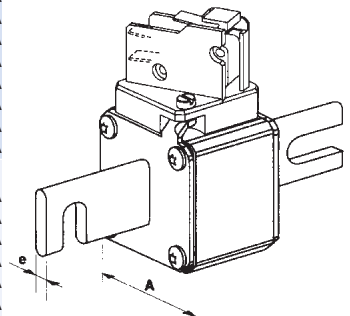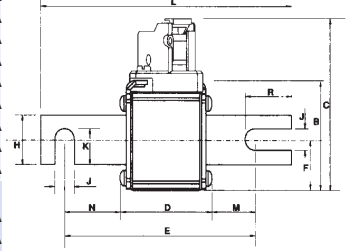

Fuse holders and microswitches supplied separately (see Fuse Holders and microswitches 3x & 7x sections)

Dimensions in mm

fuse Size	A	B	C	D	E	F	G	H	J	K	d	e	L	M
30 DIN 110	40	46,5	82	47,5	101,6	21	25	10,5	17,7	134,6	23,8	30,8	25,2	6
31 DIN 110	51	56,5	91	47,5	101,6	25,5	25	10,5	17,7	134,6	23,8	30,8	25,2	6
32 DIN 110	60	65,5	100	47,5	101,6	30	32	10,5	21,2	134,6	23,8	30,8	25,2	6
33 DIN 110	74,5	79,5	114	48,5	101,6	37,2	40	10,5	25,2	134,6	23,3	30,3	25,2	6

Fuse holders	Ref. Number	a	b	c	e1	x	y	Weight (g)
SI DIN 110 630 A	F098031	40	68	82	5	215	245	1060
SI DIN 110 1250 A	L091941	45	73	87	10	215	245	1320

Use the pullout grip PM3 (T097675) for fuse sizes 30, 31, 32




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

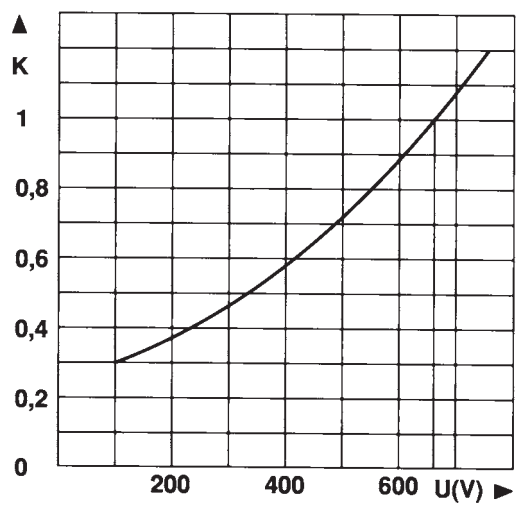

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

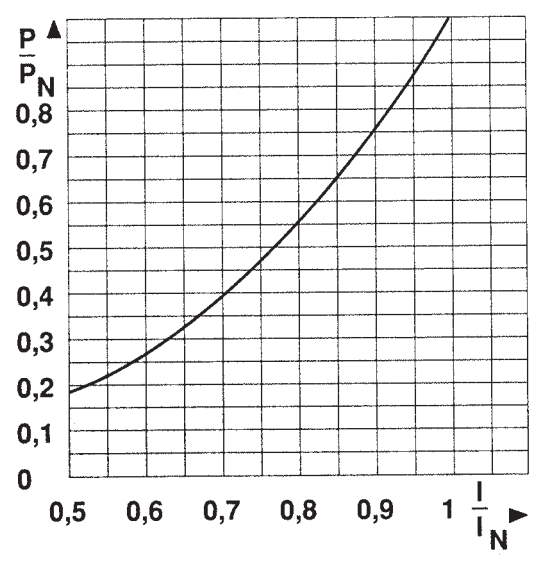

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

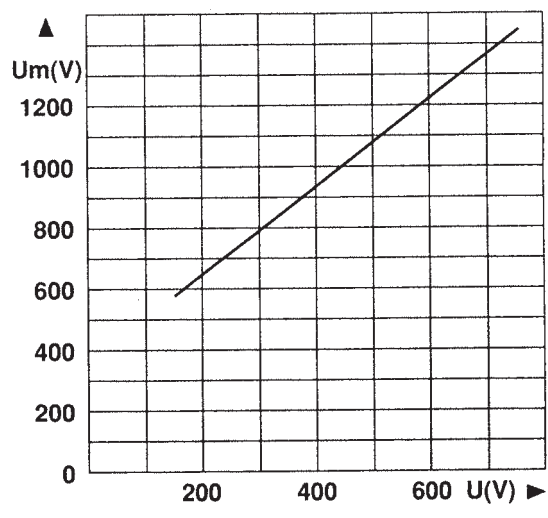


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

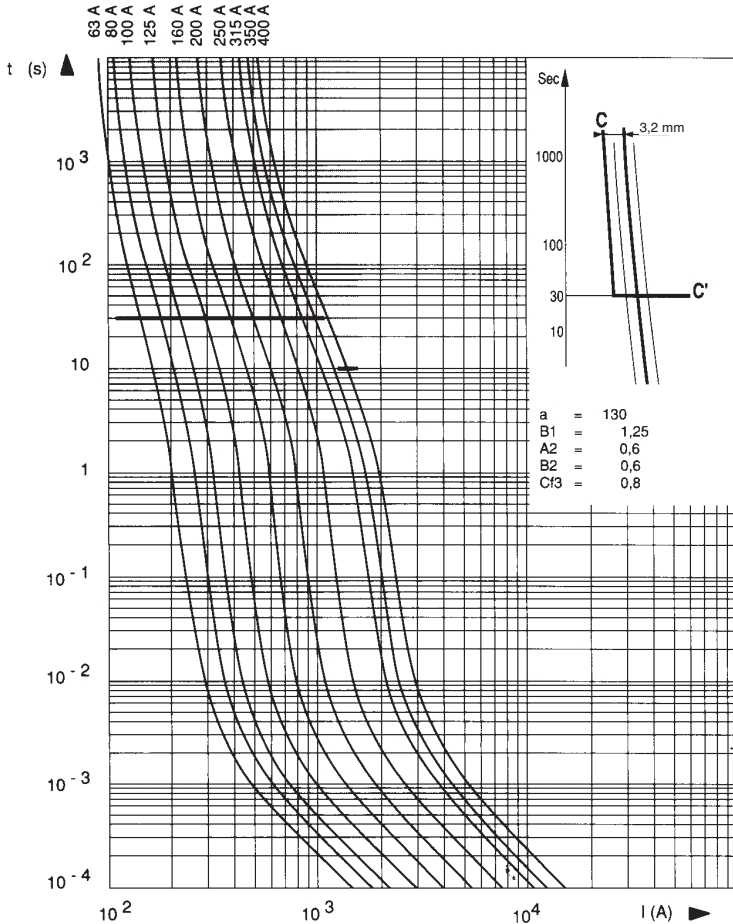

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

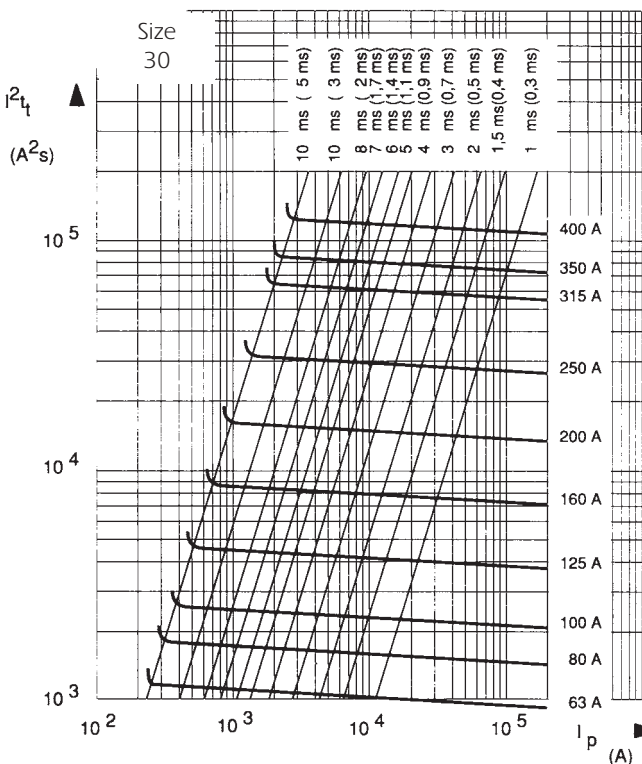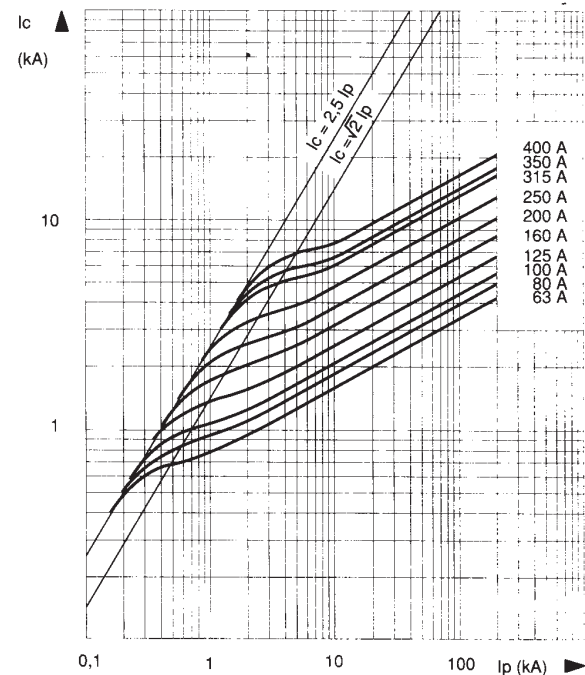

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

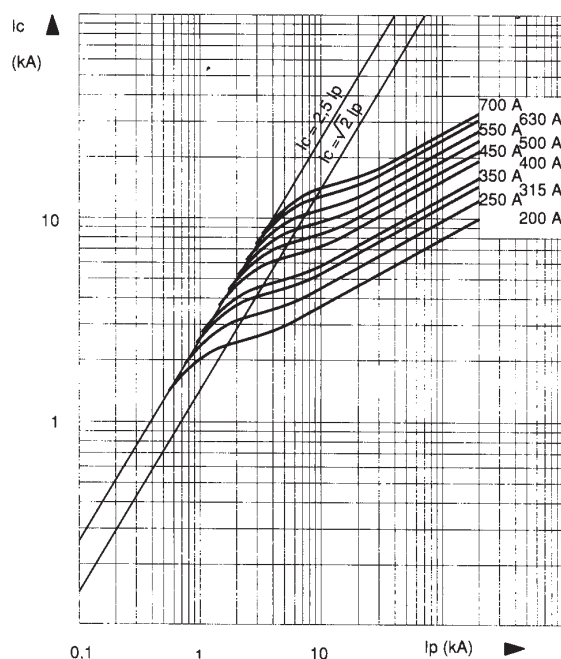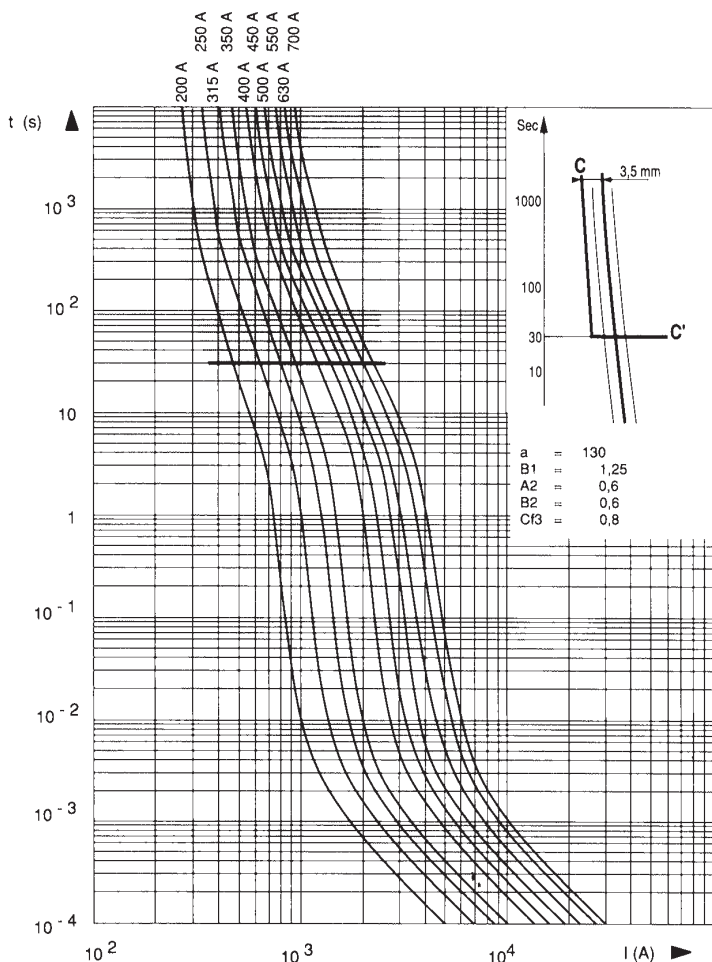


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

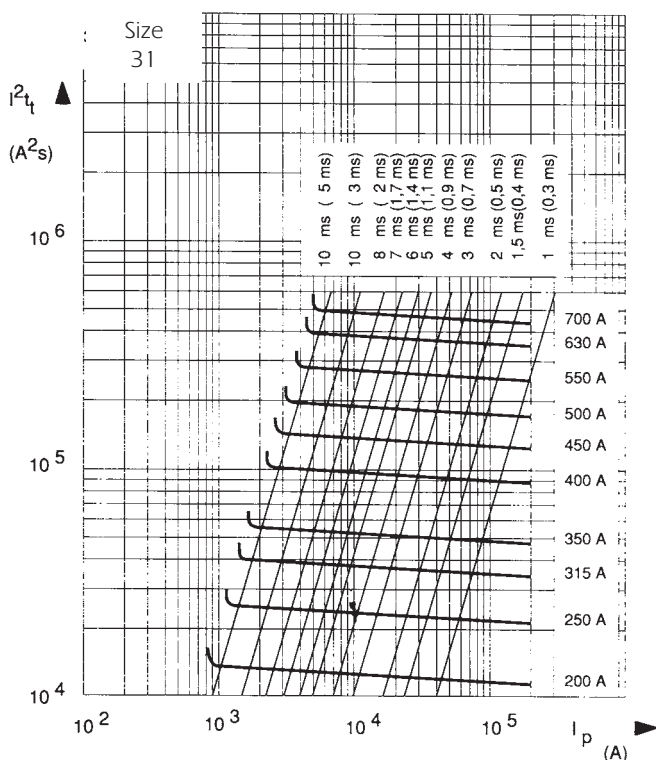





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

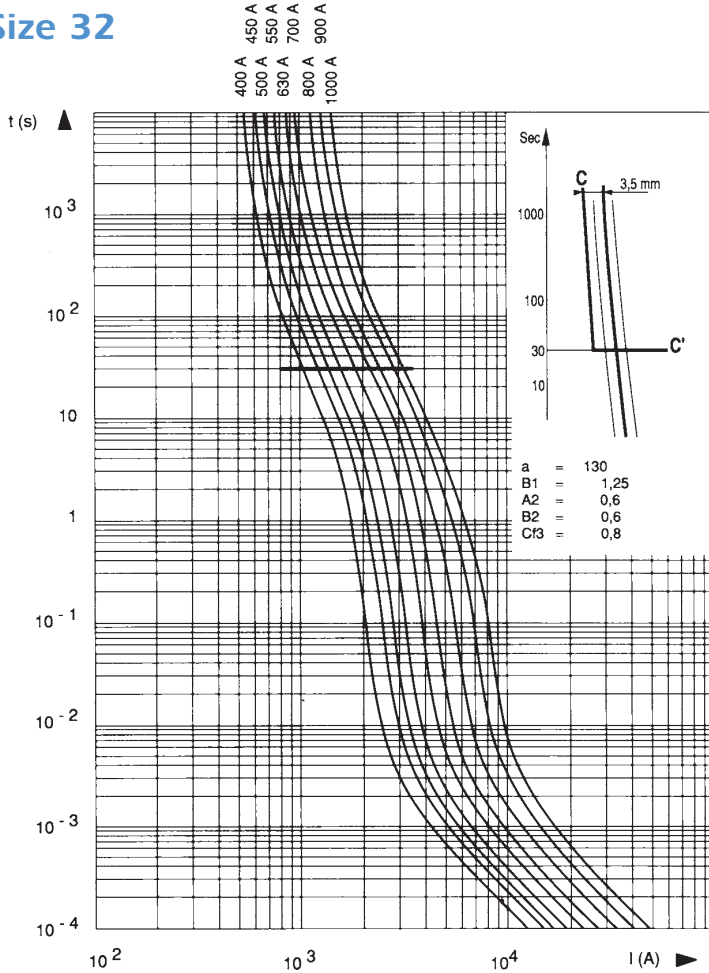

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

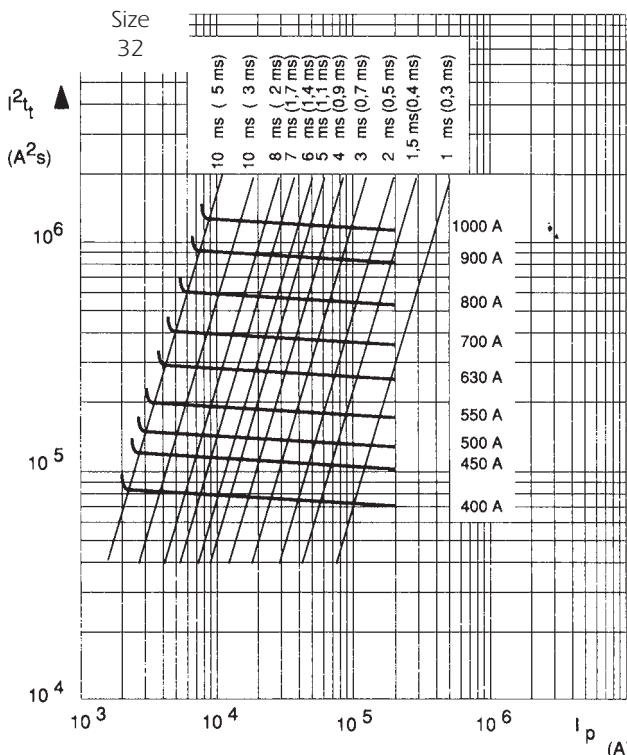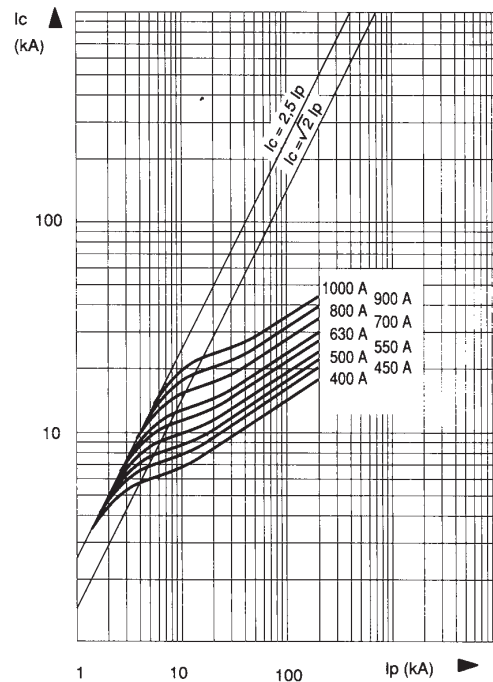

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

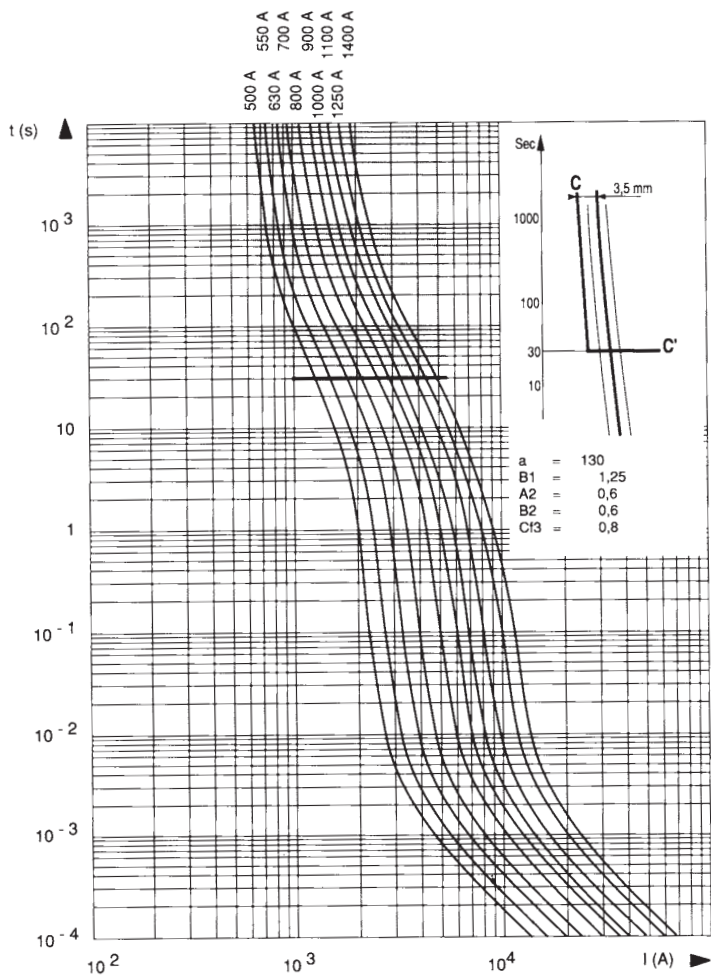

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

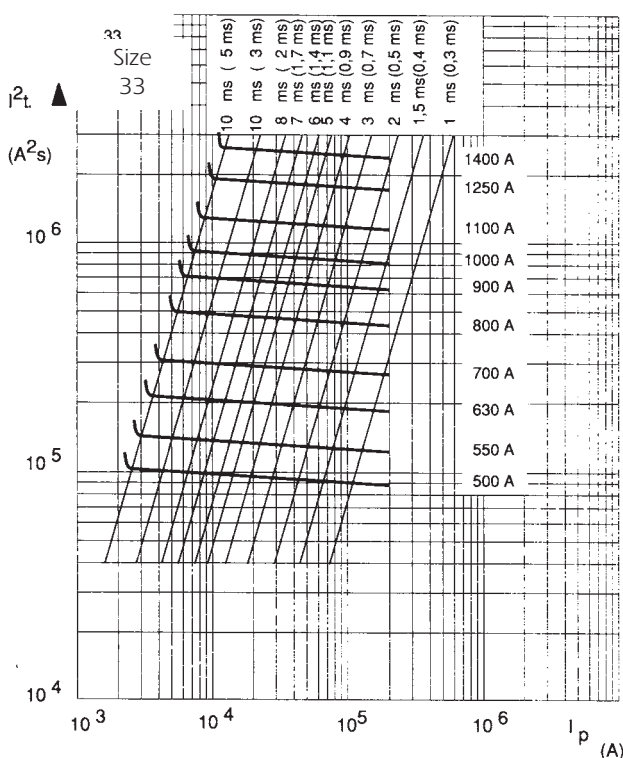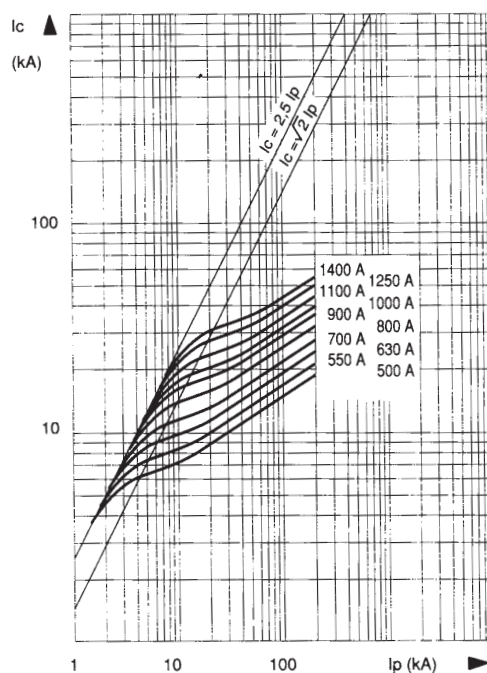

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

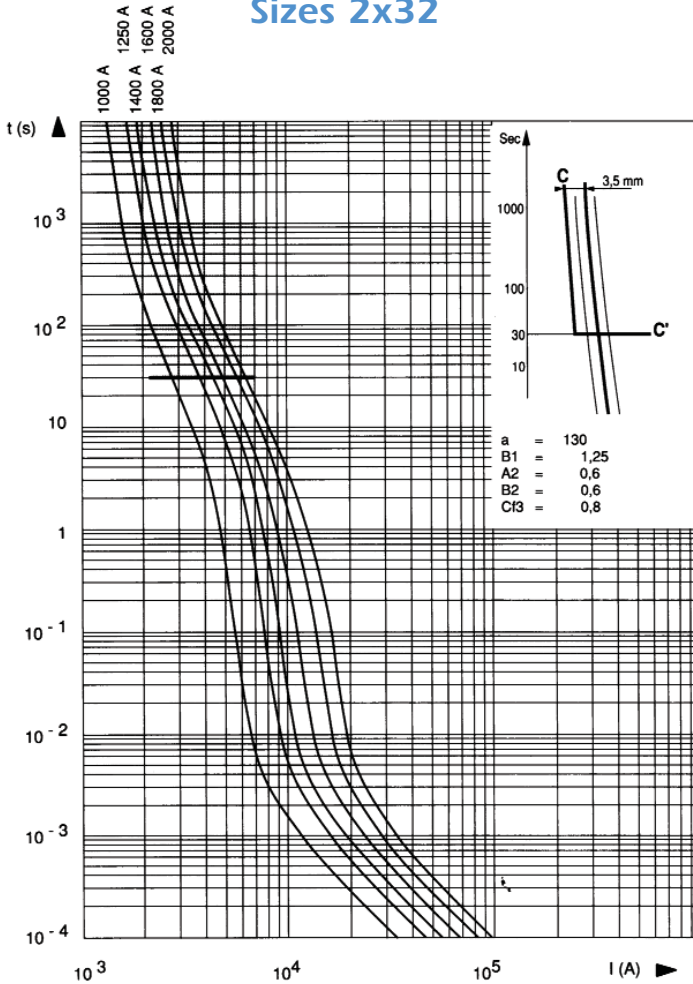

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

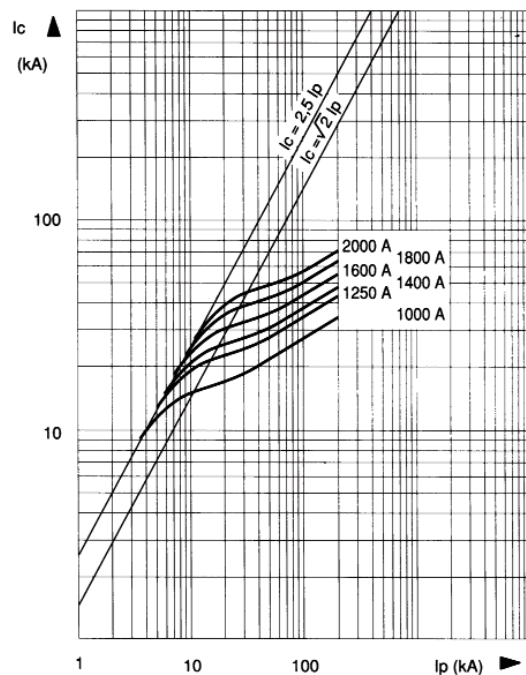

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

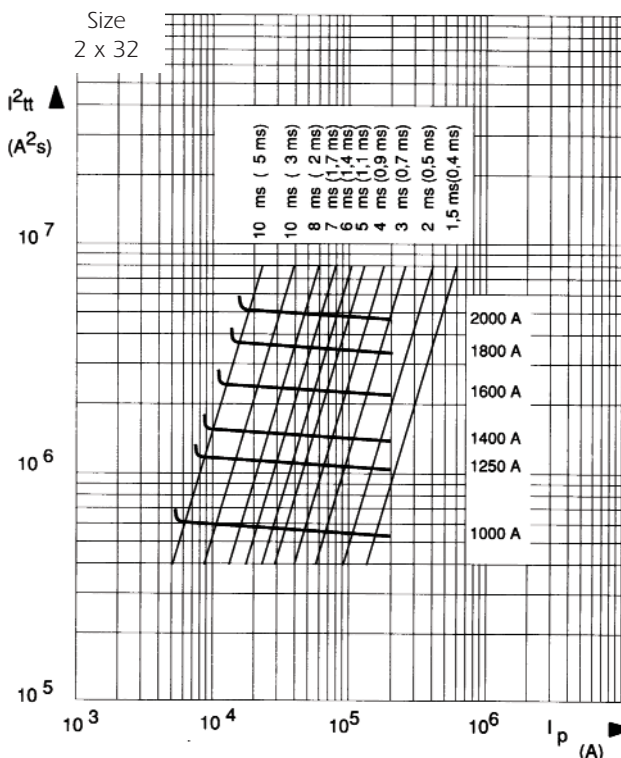

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

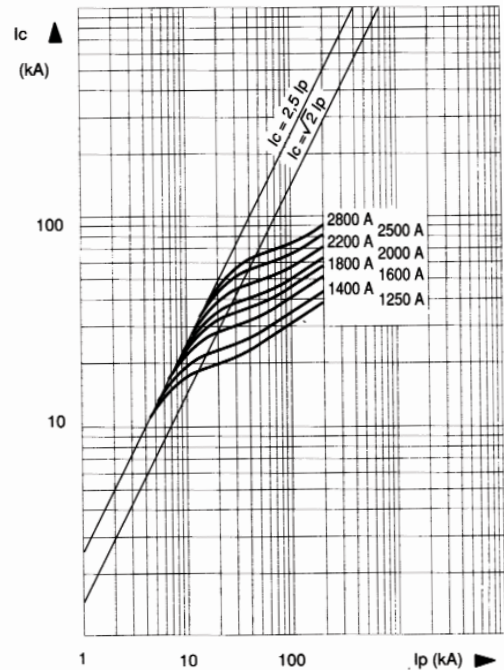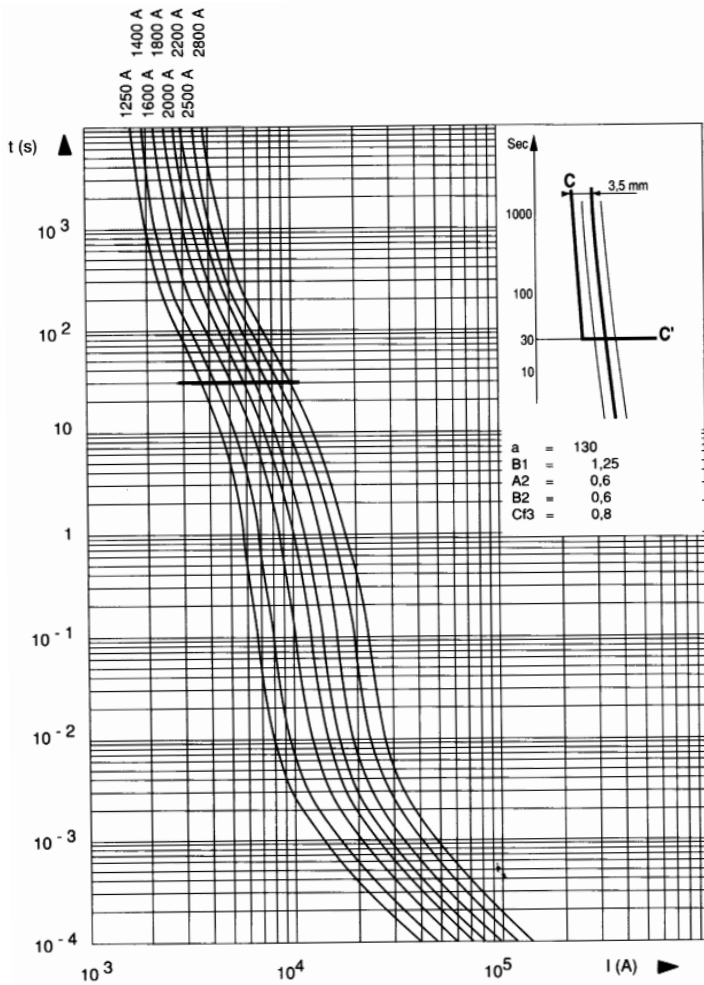

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

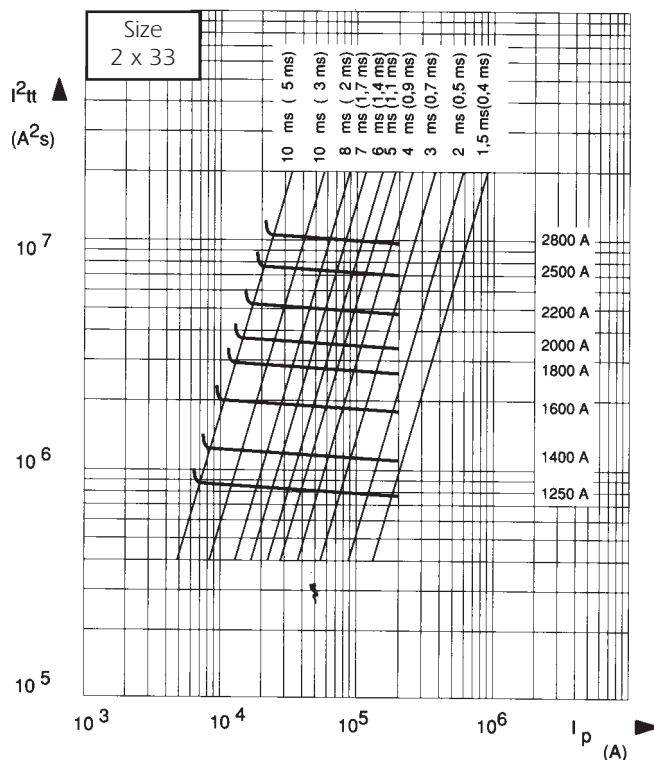

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

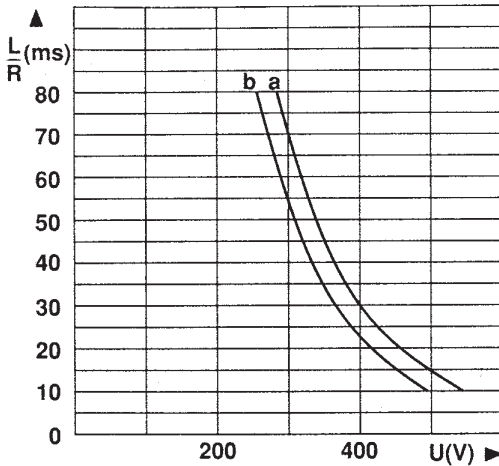

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

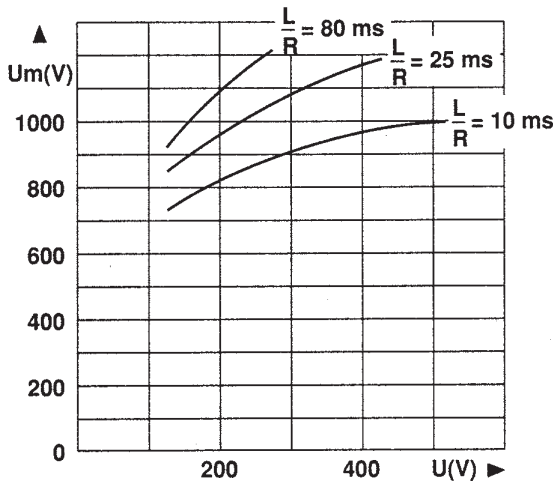

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

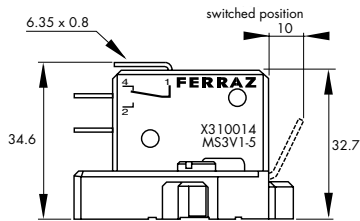


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

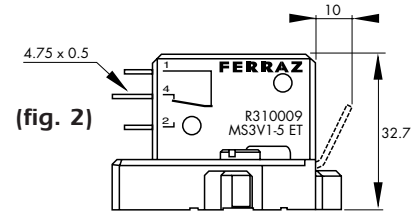


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

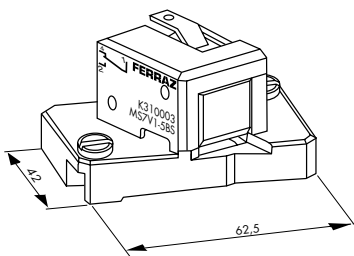

(fig. 5)

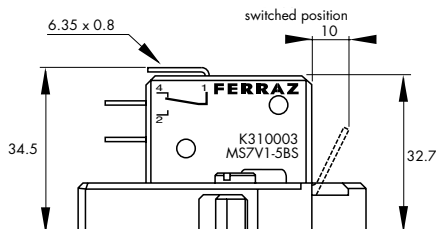


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

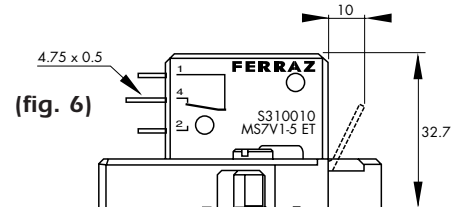



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

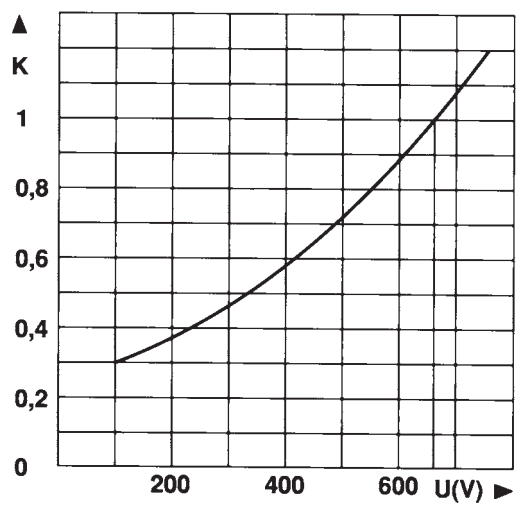

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

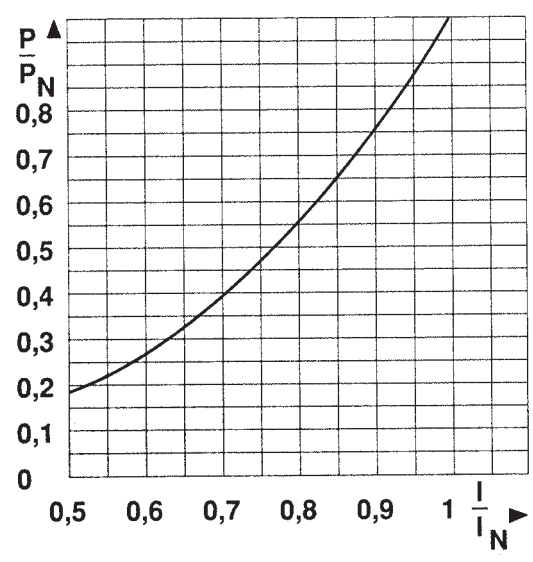

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

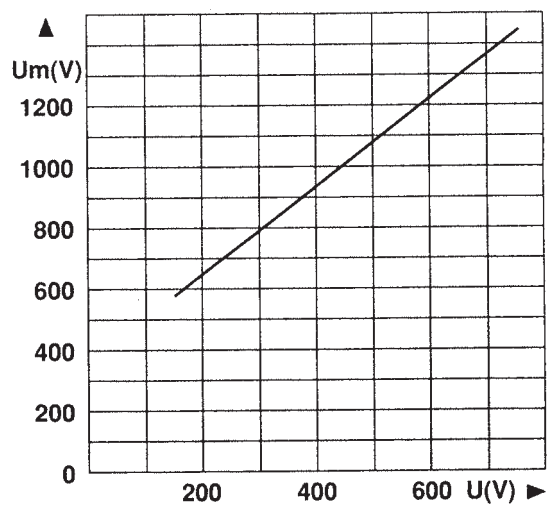


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

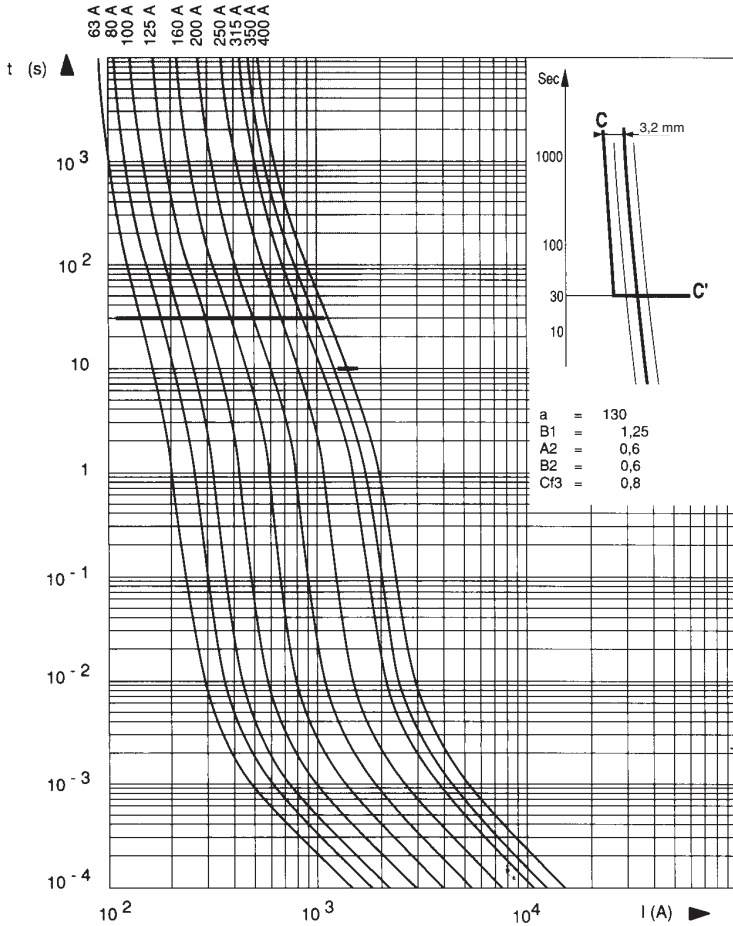

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

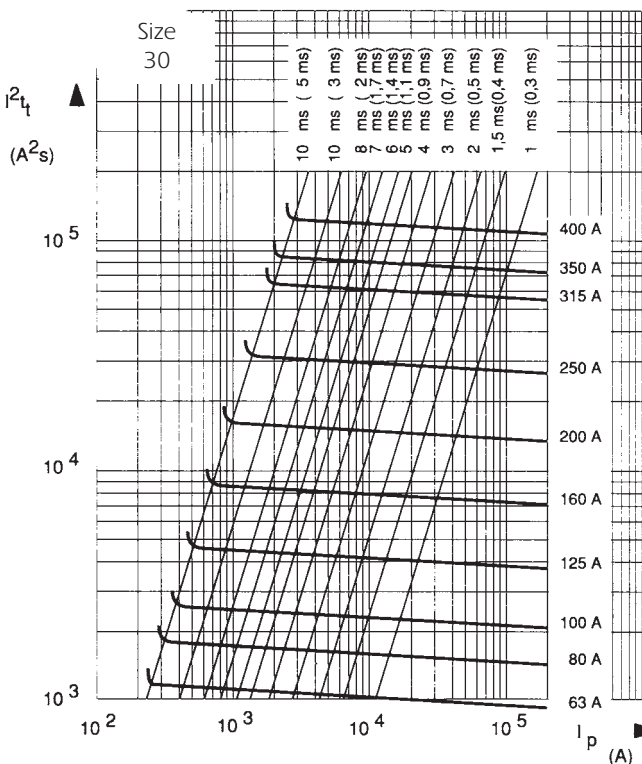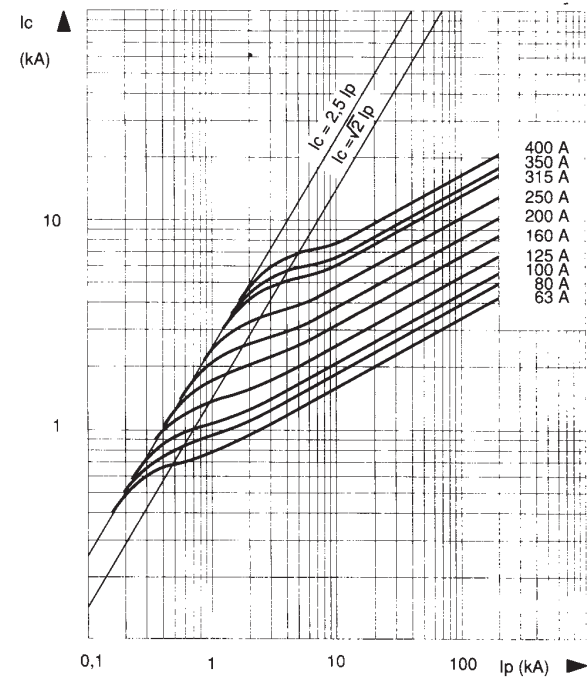

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

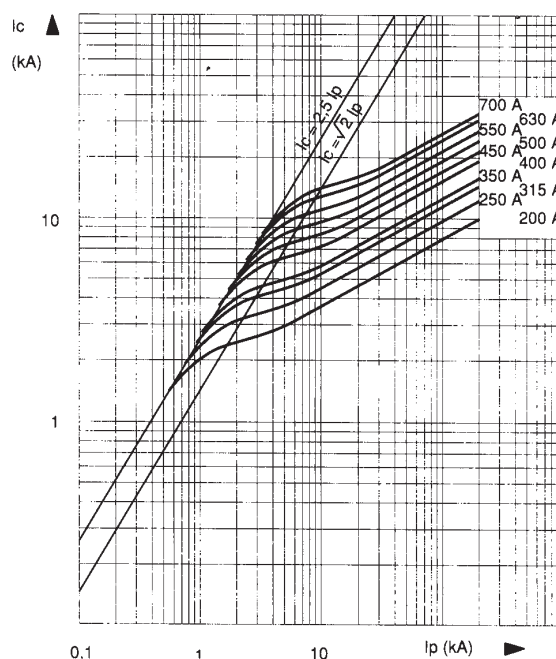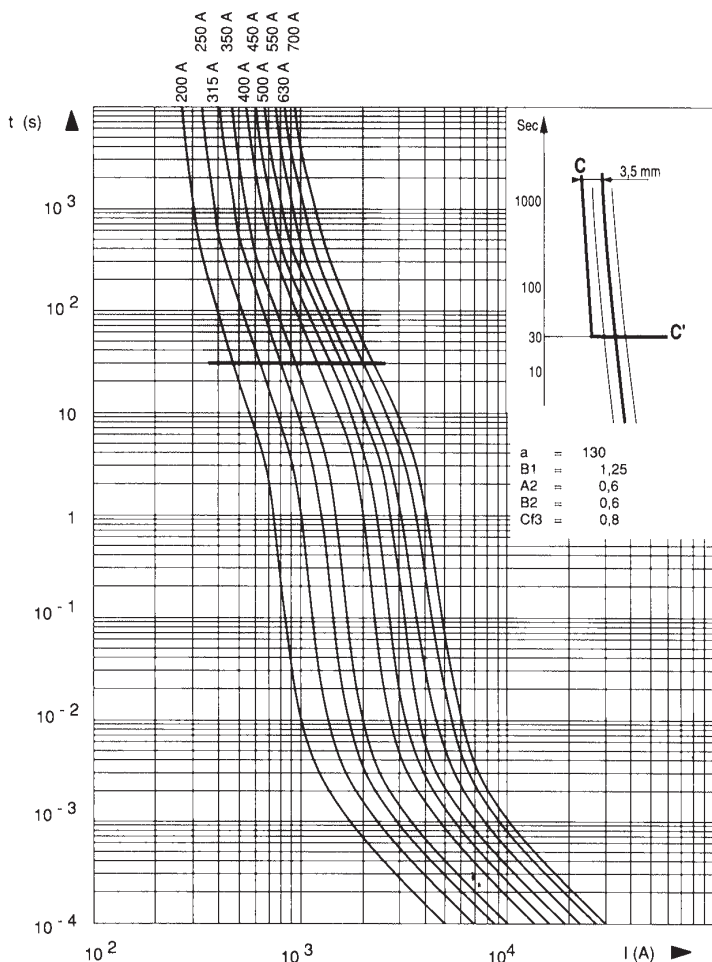


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

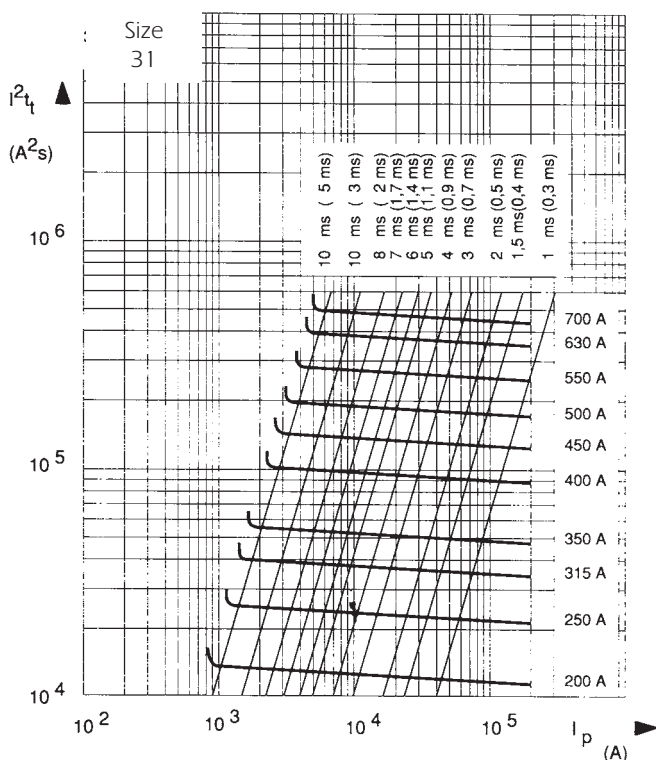





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

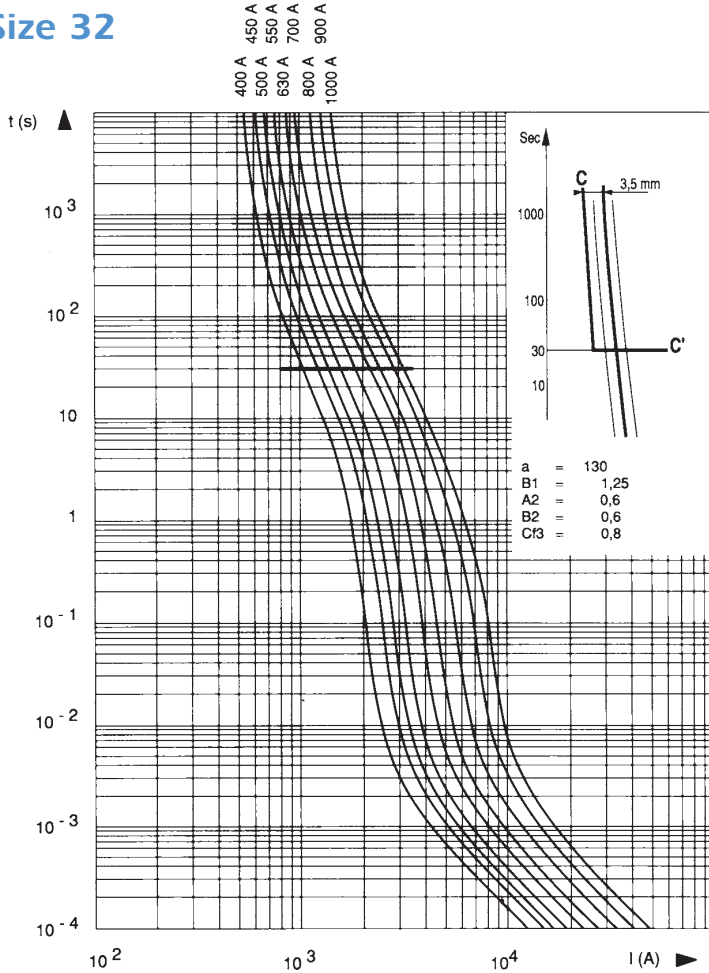

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

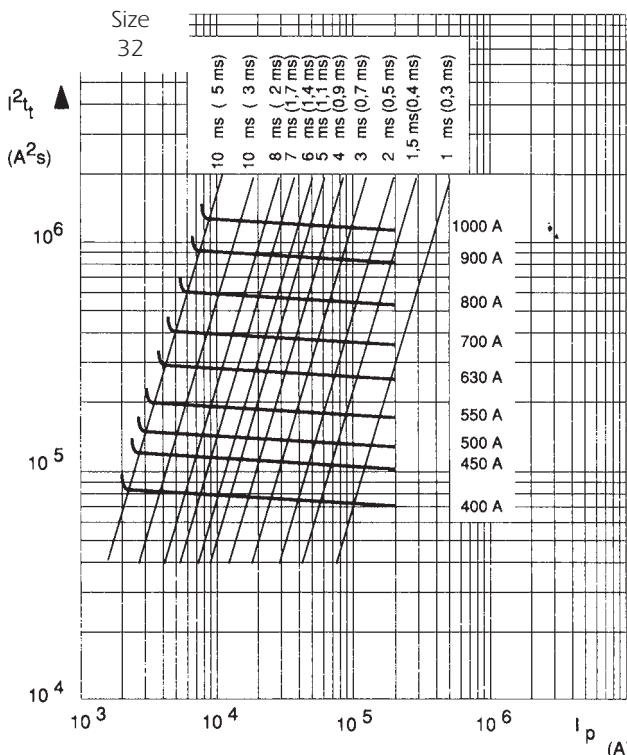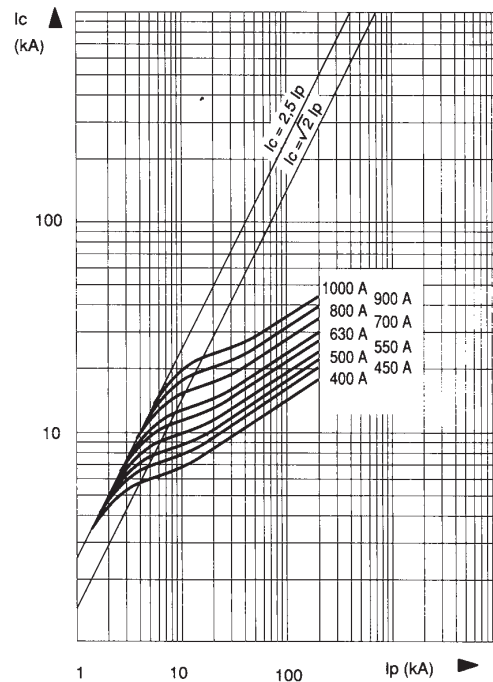

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

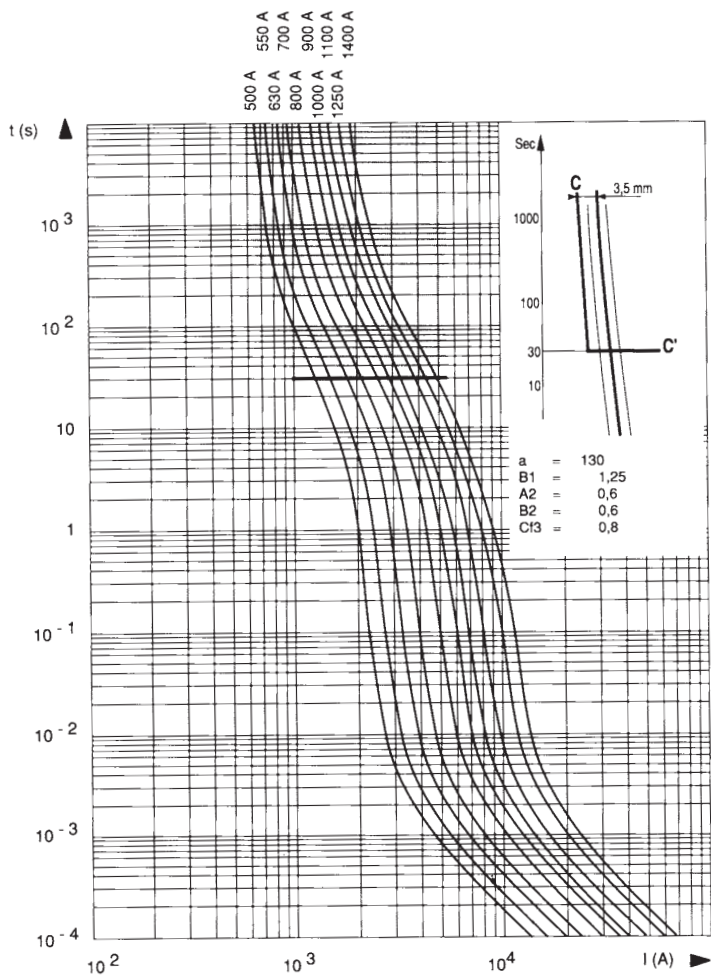

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

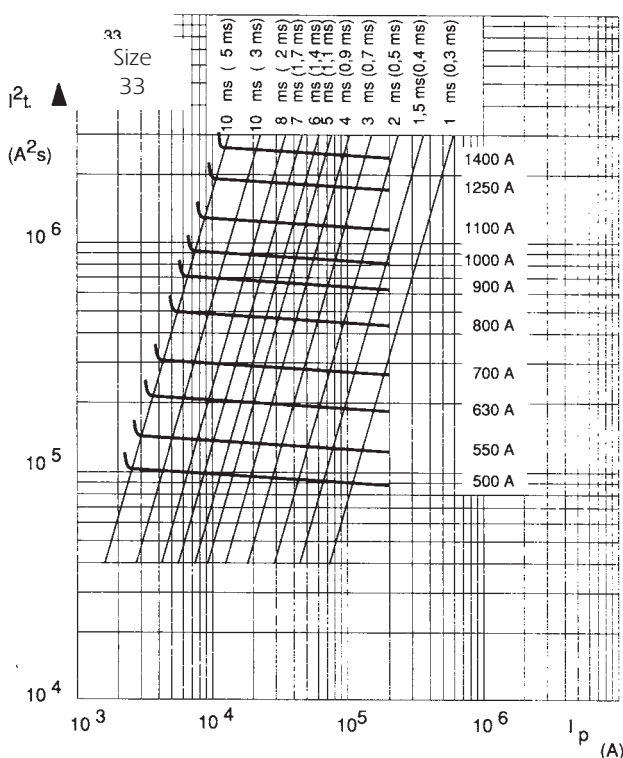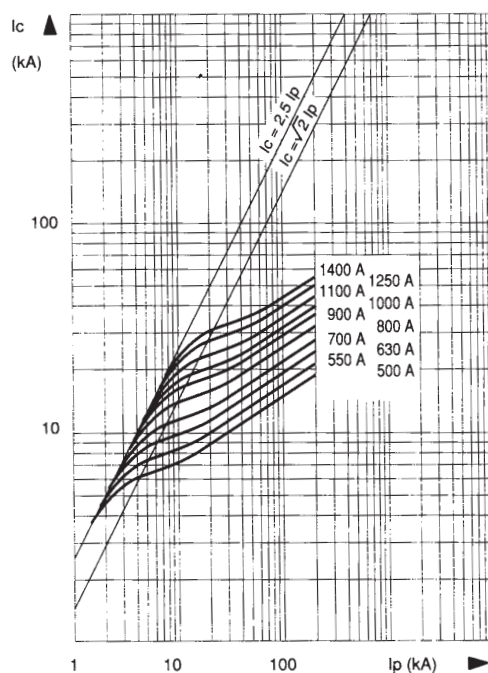

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

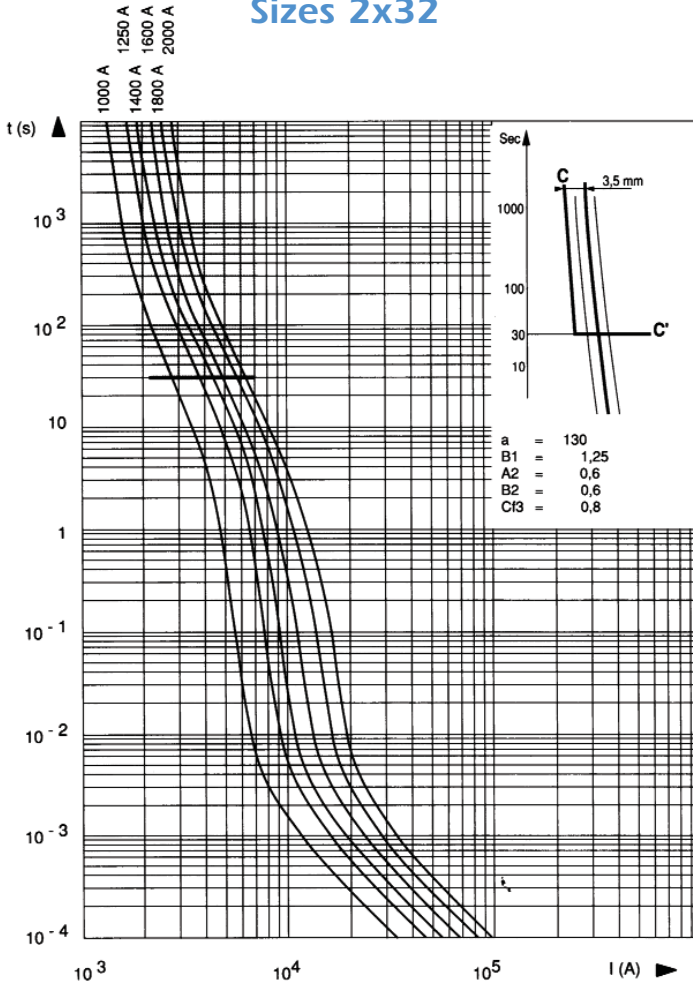

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

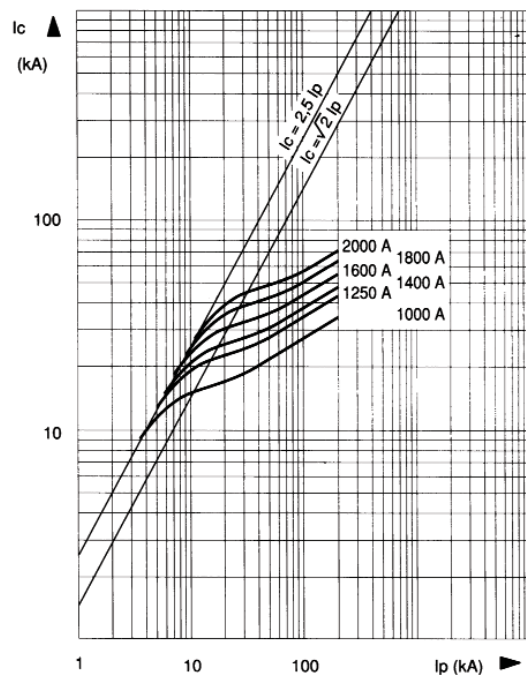

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

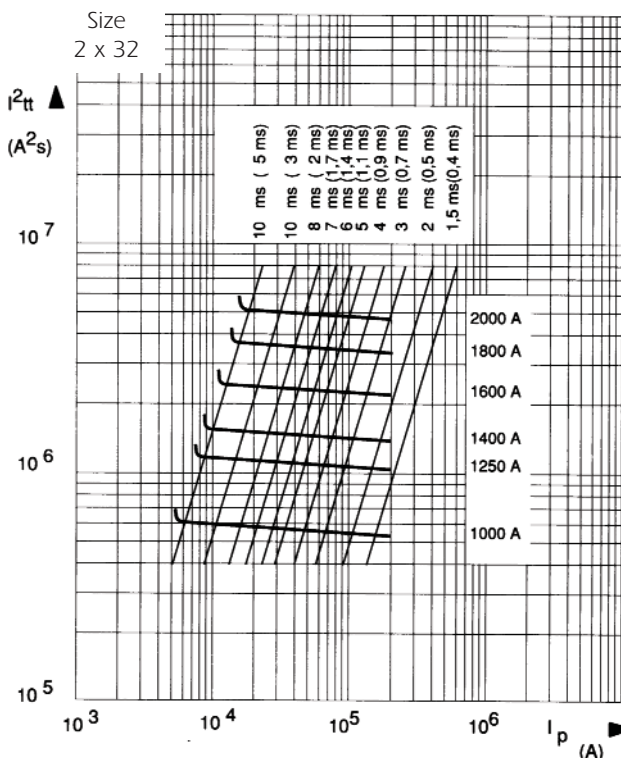

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

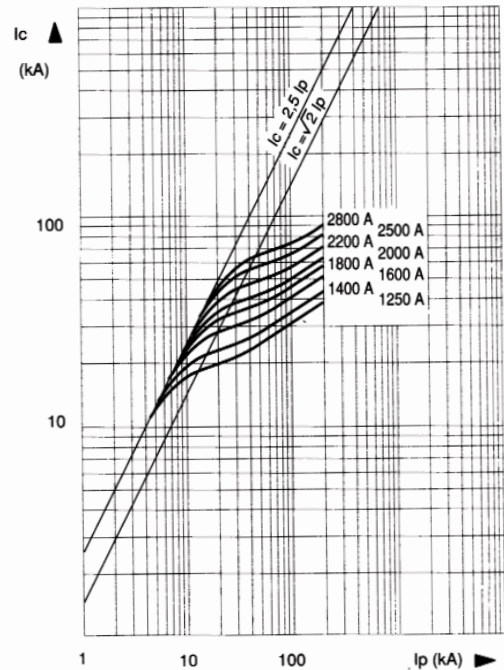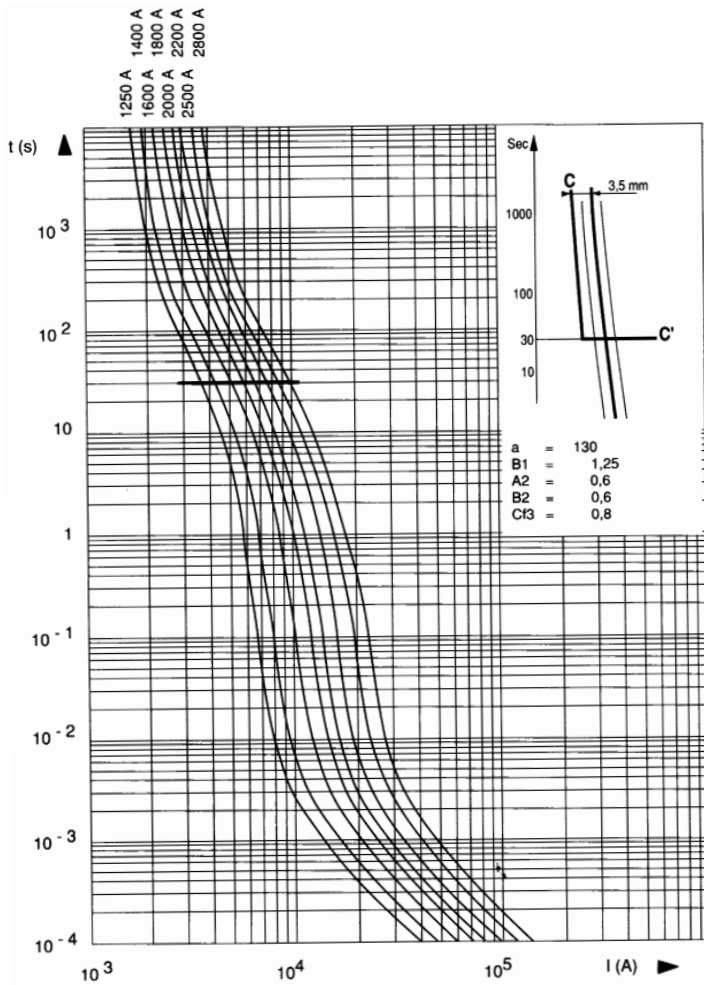

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

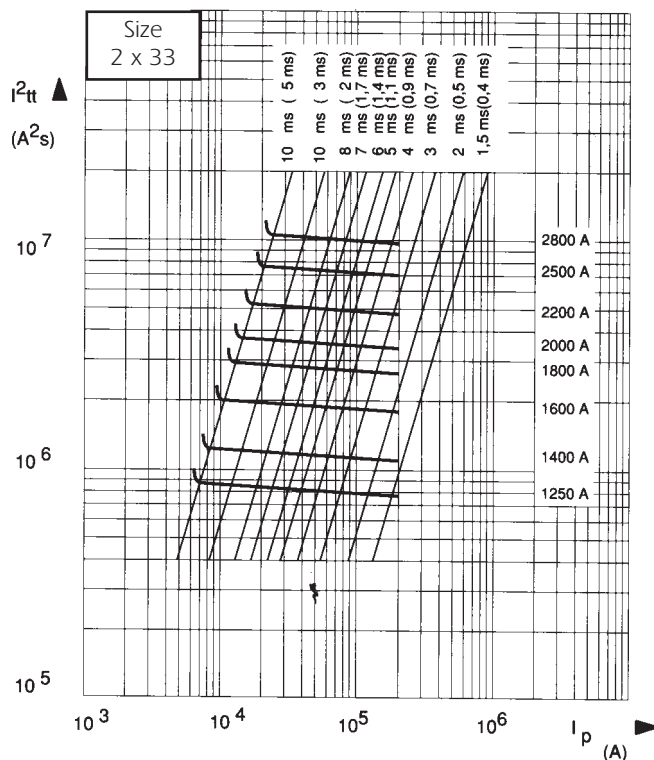

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

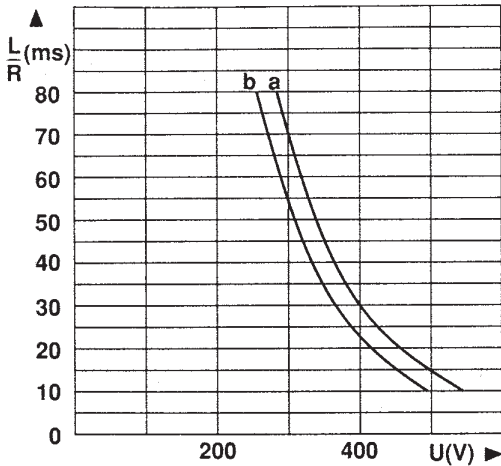

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

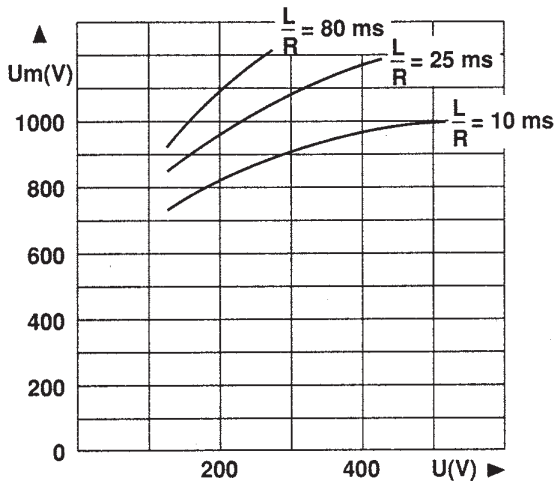

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

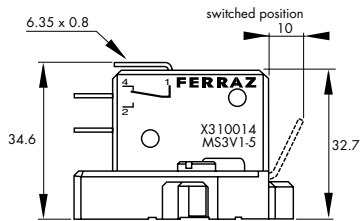


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1
but with 2 microswitches side by side


(9) Watertightness class

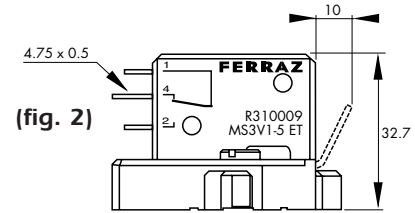


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

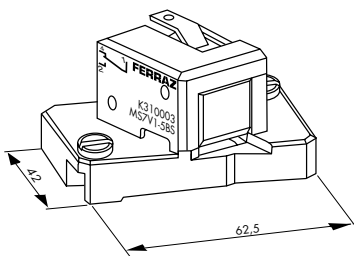

(fig. 5)

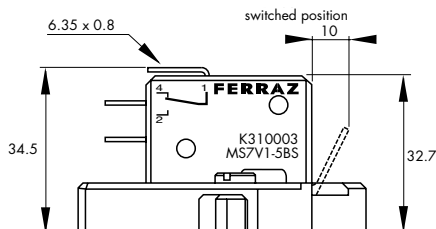


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

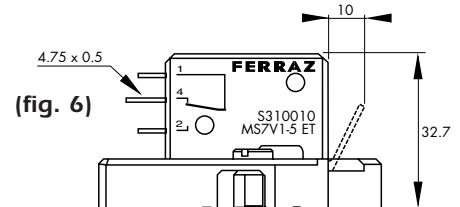



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46



NH Solid Blades 690 VAC sizes 000 to 3

gS-class Protistor® NH 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, engineered to provide state of the art protection for power semiconductors in drives.

These solid blades square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in bound sand which provides optimized I^2t and high breaking capacity.

All contact surfaces are silver plated and all hardware non-magnetic.

These products comply with the RoHS European Directive.

All fuses are standard with a low voltage dual blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.



The first gS-class range
in the marketplace!

Features/Benefits

Broad range of ampere ratings in each body size for design flexibility IEC 60269-4 compliance for fuses for worldwide semiconductor applications

Ratings

AC: up to 630 A - 690 VAC - 160 kA IR

DC: up to 510 V L/R 10ms

for high di/dt (capacitor discharges), consult us

Approvals

AC: Tested to IEC 269.4 at 690V +10%

UL/CSA recognized pending

Features


- Ultra fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Reduced power losses
- No derating in standard NH fusegear (ref. to page 9)
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

Innovations

The first gS-class range in the market




Electrical characteristics


Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms (A ² s)	Total I ² t @ 690 V (A ² s)	Pn: Power losses (W) PV 43620 0,8In	Breaking capacities @ Un kA
690V IEC 700V UL	000	gS	25	17,1	96	7	160
	000	gS	32	38,7	218	8	160
	000	gS	40	68,7	386	9	160
	000	gS	50	136	764	10	160
	000	gS	63	275	1540	11	160
	000	gS	80	543	3050	13	160
	000	gS	100	1064	5980	14	160
	00	gS	125	2170	10850	16	160
	00	gS	160	4269	21340	19	160
	1	gS	125	1712	8560	21	160
	1	gS	160	3858	19290	23	160
	1	gS	200	7560	37800	26	160
	1	gS	250	15432	77160	29	160
	1	gS	280	18663	93310	33	160
	2	gS	250	12482	62410	33	160
	2	gS	315	27952	139760	36	160
	2	gS	350	38280	191400	38	160
	2	gS	400	54252	271260	41	160
	2	gS	450	81092	405460	43	160
	3	gS	315	19531	97650	42	160
	3	gS	350	28132	140660	44	160
	3	gS	400	42050	210250	47	160
	3	gS	450	58674	293370	50	160
	3	gS	500	87028	435140	52	160
3	gS	550	111808	559040	56	160	
3	gS	630	149889	749440	63	160	

DC working voltage possibilities

Peak Arc Voltage vs Applied DC voltage

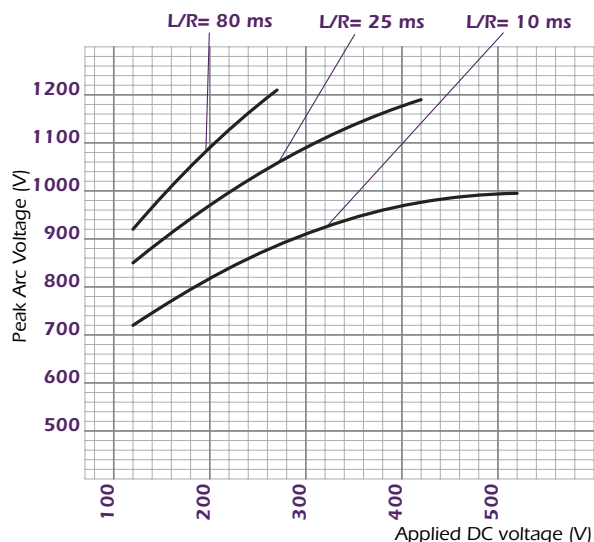


L/R Time constant vs DC voltage capability

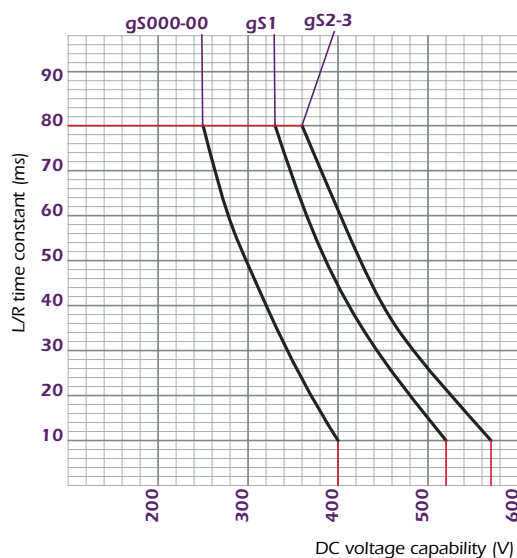



Main dimensions and references

Size	Cat Number	Reference	Weight [kg]	Pack [pcs]
000	NH000GS69V25PV	S322039C	135	3
000	NH000GS69V32PV	X322043C	135	3
000	NH000GS69V40PV	B322047C	135	3
000	NH000GS69V50PV	F322051C	135	3
000	NH000GS69V63PV	K322055C	135	3
000	NH000GS69V80PV	P322059C	135	3
000	NH000GS69V100PV	T322063C	135	3
00	NH00GS69V125PV	E322165C	200	3
00	NH00GS69V160PV	J322169C	200	3
1	NH1GS69V125PV	X322365C	250	3
1	NH1GS69V160PV	B322369C	250	3
1	NH1GS69V200PV	D322371C	250	3
1	NH1GS69V250PV	H322375C	250	3
1	NH1GS69V280PV	L302897C	250	3
2	NH2GS69V250PV	R322475C	430	3
2	NH2GS69V315PV	W322479C	430	3
2	NH2GS69V350PV	X322480C	430	3
2	NH2GS69V400PV	A322483C	430	3
2	NH2GS69V450PV	C322485C	430	3
3	NH3GS69V315PV	E322579A	600	1
3	NH3GS69V350PV	F322580A	600	1
3	NH3GS69V400PV	J322583A	600	1
3	NH3GS69V450PV	L322585A	600	1
3	NH3GS69V500PV	N322587A	600	1
3	NH3GS69V550PV	P322588A	600	1
3	NH3GS69V630PV	Q322589A	600	1

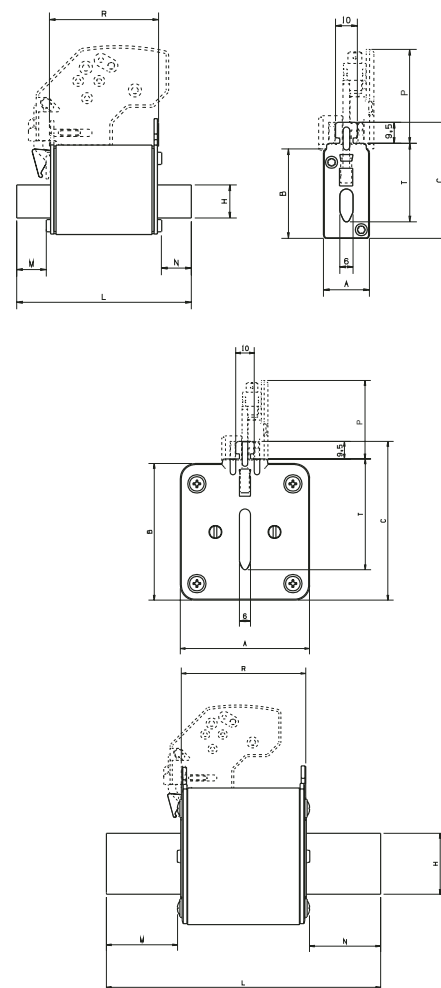

Microswitches


MSNHB6 + PRES: consult us (6,3mm clips)

MSNHB2 + PRES: consult us (2.8 mm clips)


Automatically resetable, these microswitch systems indicate fuse presence (PRES) and proper mounting

In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)


Size	A	B	C	H	L	M	N	P	R	T
000	20,8	40,5	52,5	15	79	13,5	13,5	43,4	49,5	35
000	0.82"	1.59"	2.07"	0.59"	3.11"	0.53"	0.53"	1.71"	1.95"	1.38"
00	29,5	47,5	59,5	15	79	13,1	13,1	43,4	50	35
00	1.16"	1.87"	2.34"	0.59"	3.11"	0.52"	0.52"	1.71"	1.97"	1.38"
1	39,5	52,5	64,5	20	135	32,1	32,1	43,4	68	40
1	1.56"	2.07"	2.54"	0.79"	5.32"	1.26"	1.26"	1.71"	2.68"	1.57"
2	51	60	72	26	150	38,85	38,85	43,4	68	48
2	2.01"	2.36"	2.85"	1.02"	5.91"	1.53"	1.53"	1.71"	2.68"	1.89"
3	70	74	86	33	150	38,85	38,85	43,4	68	60
3	2.76"	2.91"	3.39"	1.30"	5.91"	1.53"	1.53"	1.71"	2.68"	2.36"




Times/Current Characteristics size 000-00

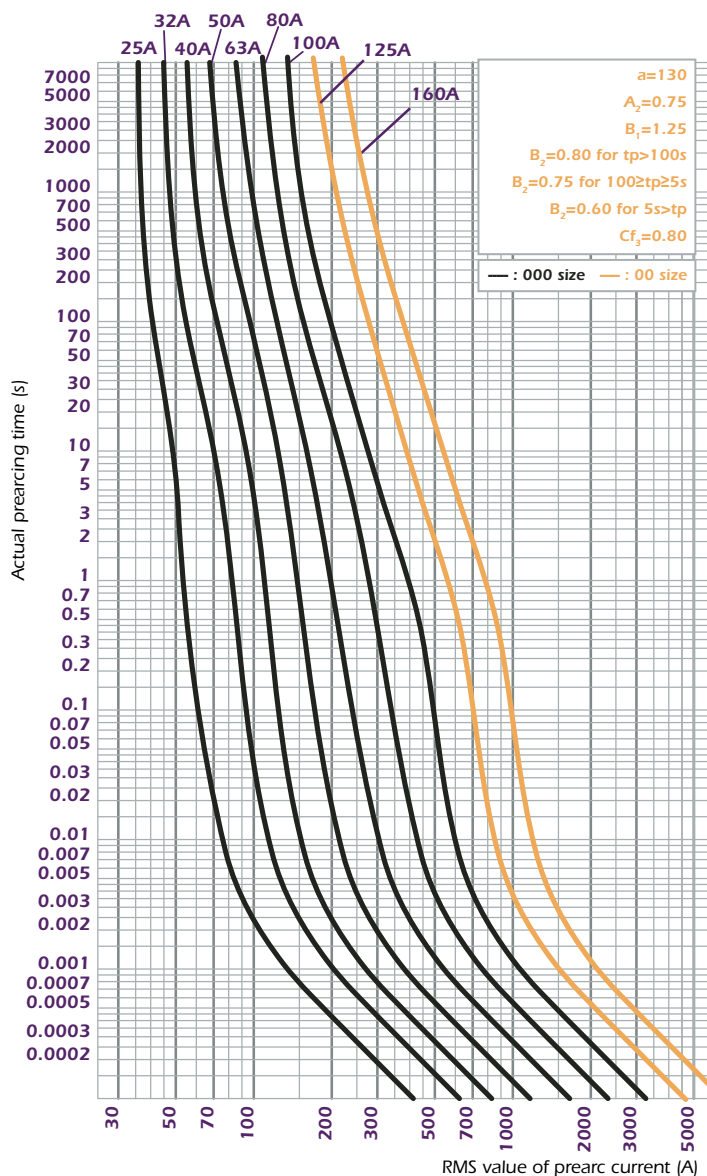


Cut off characteristics - Peak let thru current - size 000-00

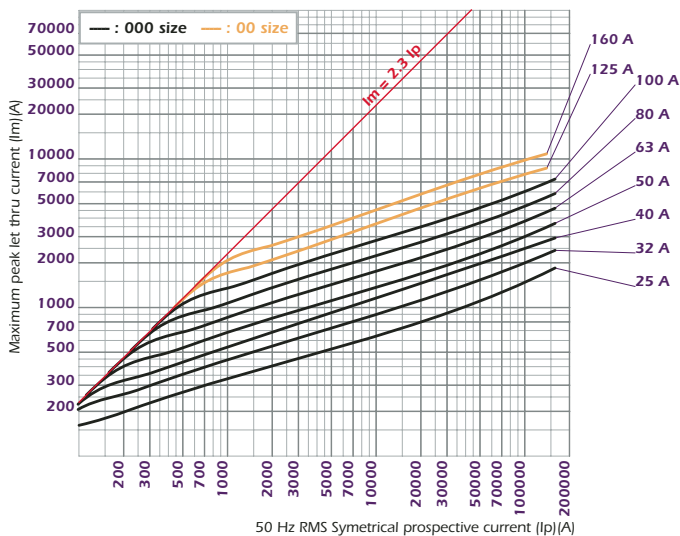


Peak arc voltage vs applied AC voltage size 000

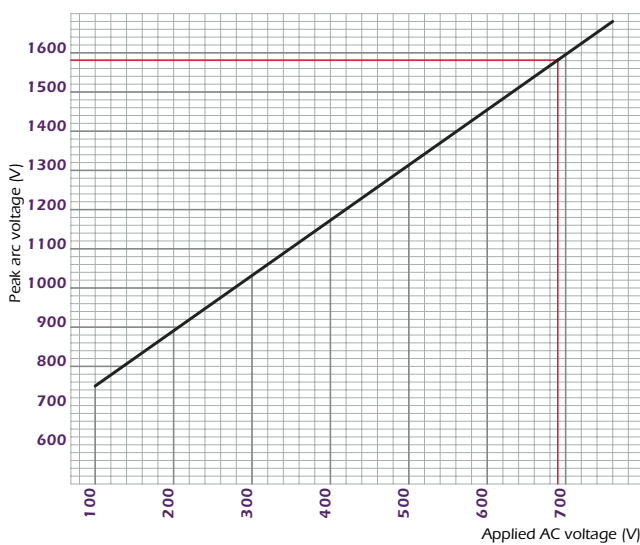

Clearing I²t and arcing time correction factor vs Applied AC voltage size 000-00

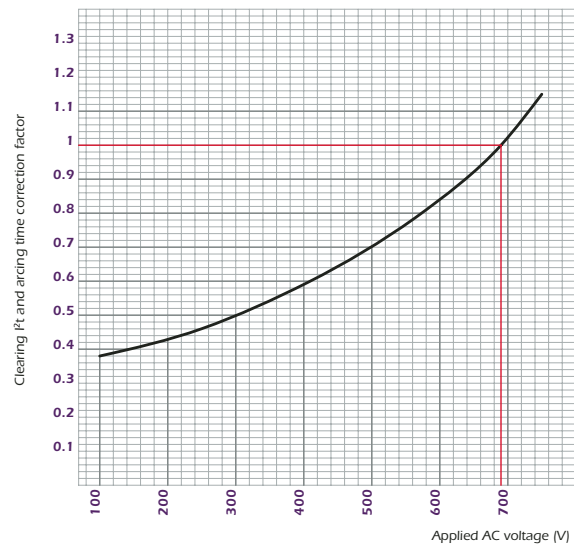


Watts loss vs % rated current size 000-00

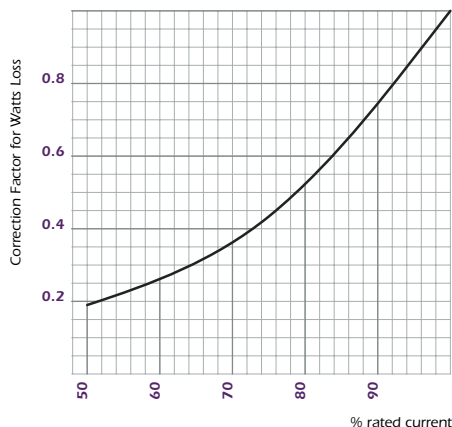





Times/Current Characteristics size 1

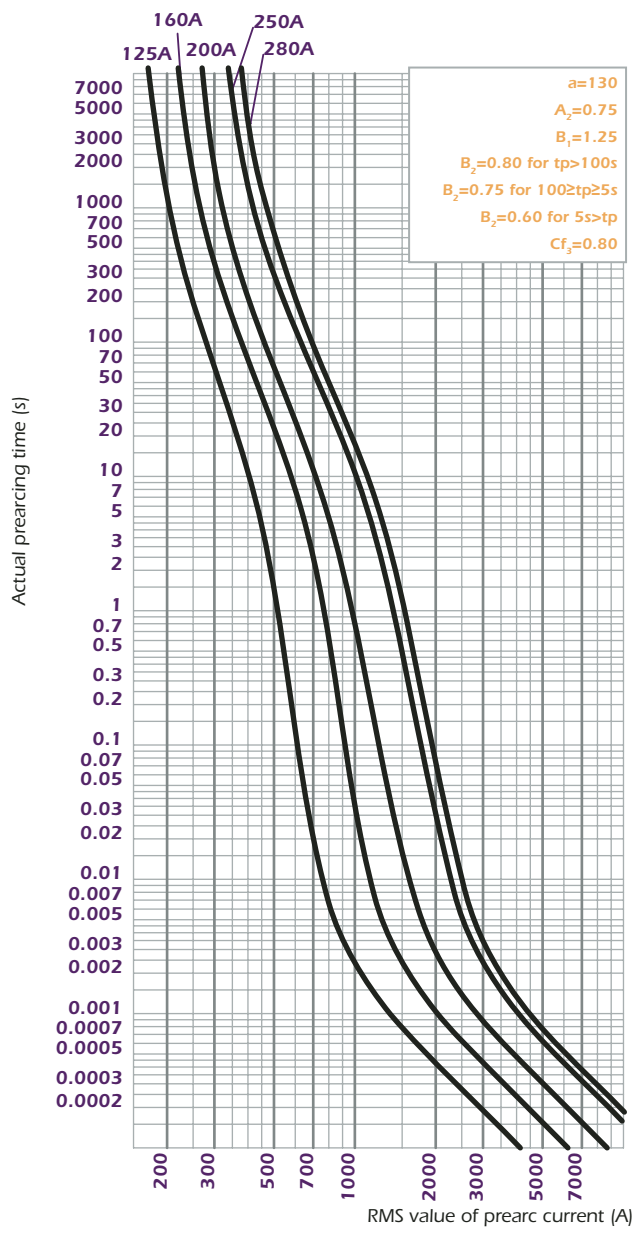


Cut off characteristics - Peak let thru current - size 1

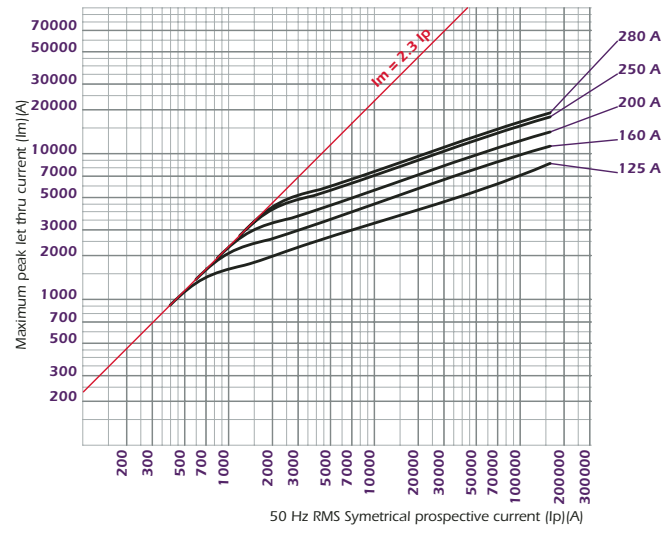


Peak arc voltage vs applied AC voltage size 1

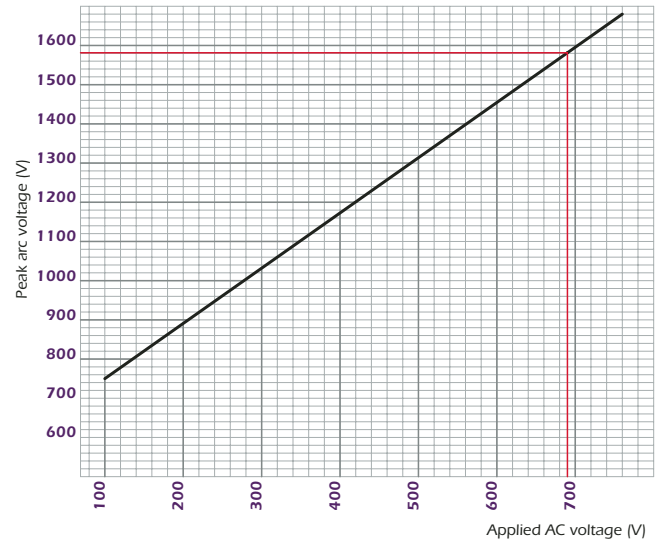

Clearing I²t and arcing time correction factor vs Applied AC voltage size 1

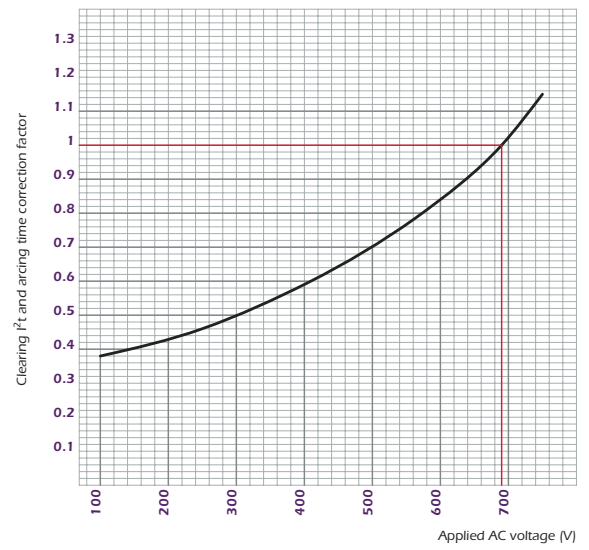


Watts loss vs % rated current size 1

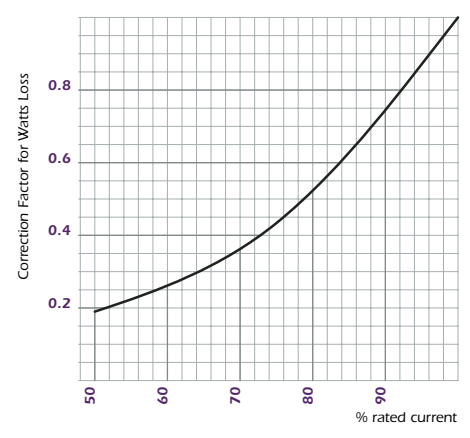





Times/Current Characteristics size 2

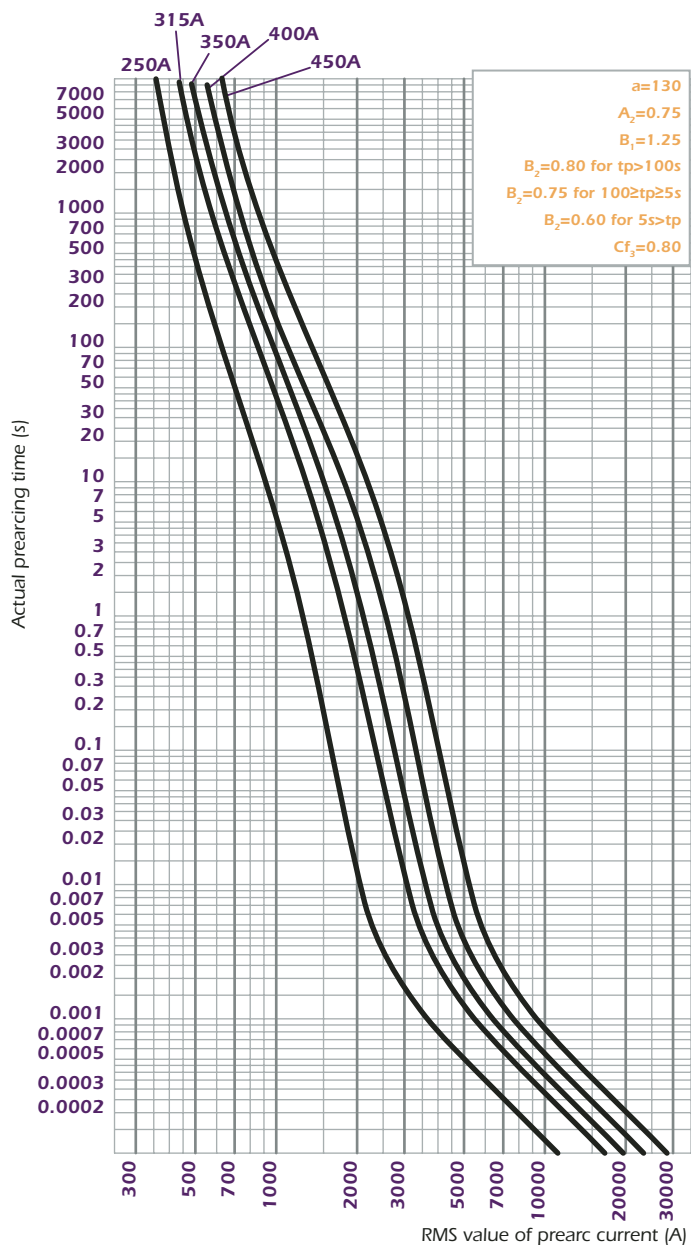


Cut off characteristics - Peak let thru current - size 2

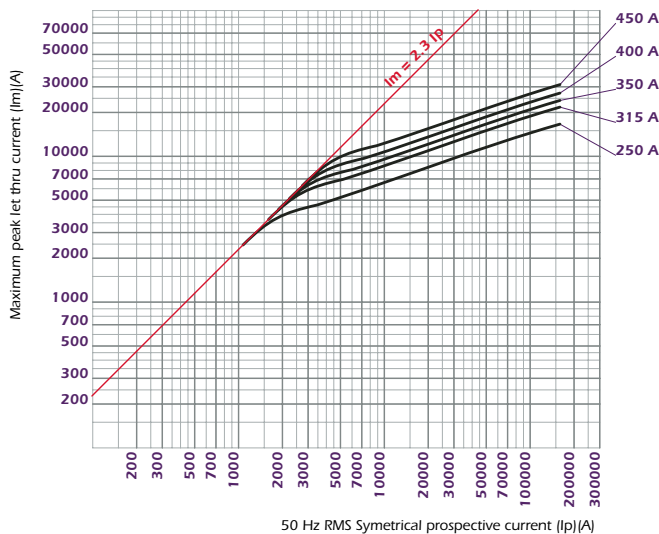


Peak arc voltage vs applied AC voltage size 2

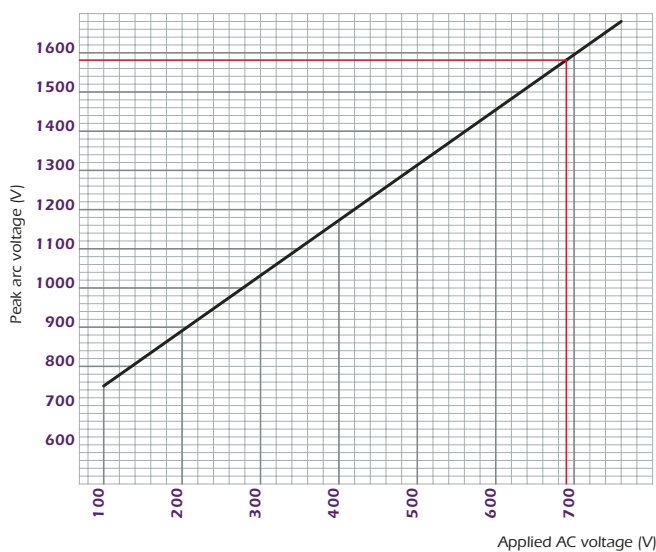

Clearing I²t and arcing time correction factor vs Applied AC voltage size 2

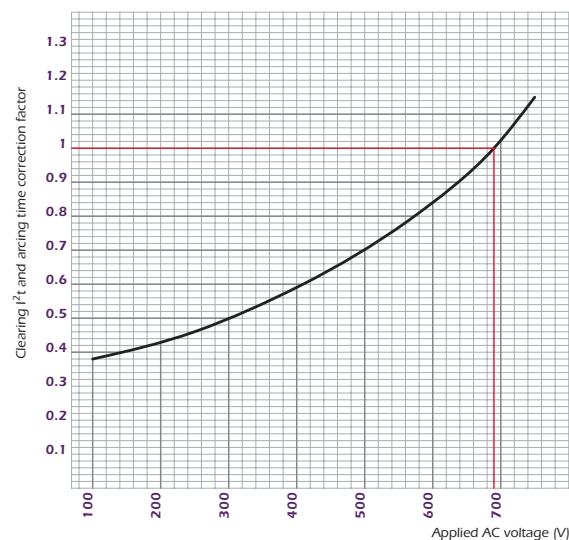


Watts loss vs % rated current size 2

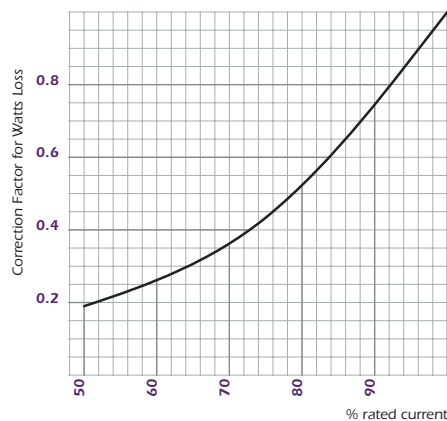





Times/Current Characteristics size 3

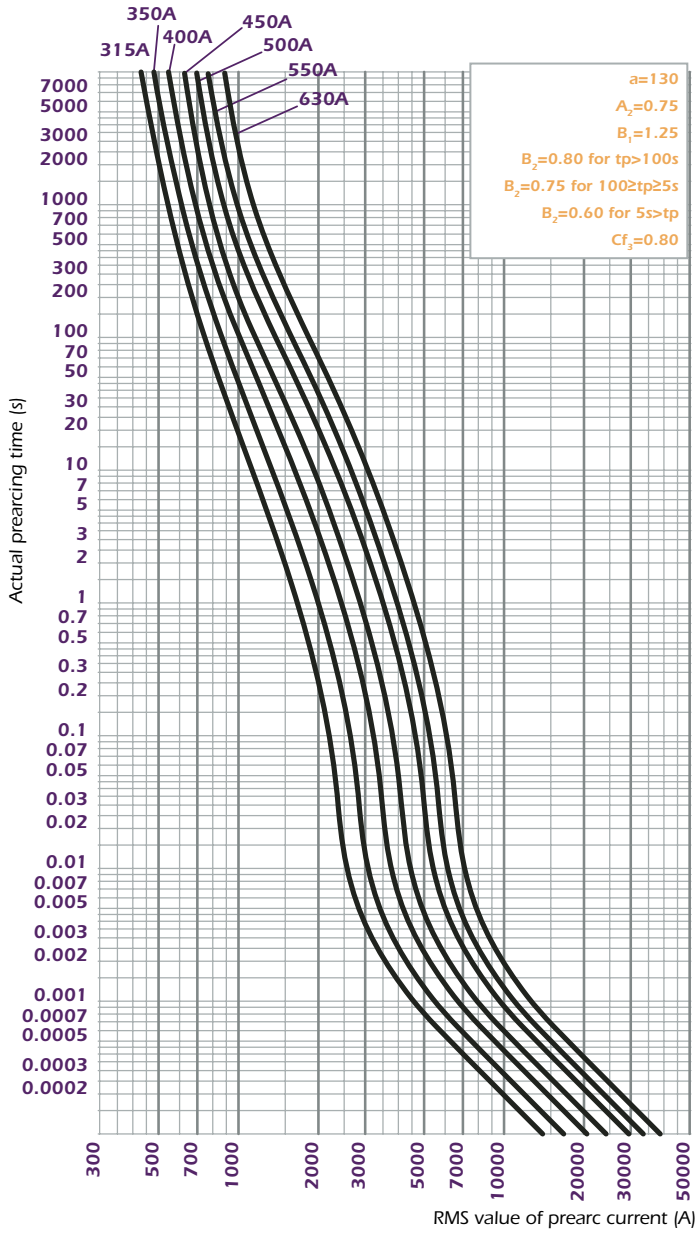


Cut off characteristics - Peak let thru current - size 3

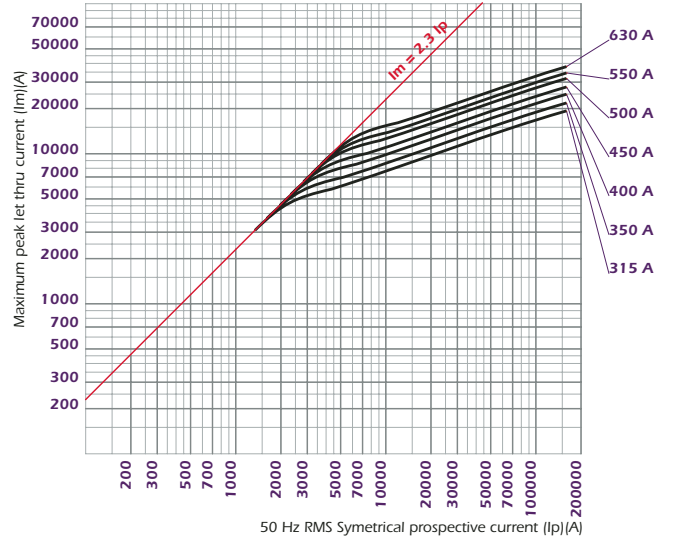


Peak arc voltage vs applied AC voltage size 3

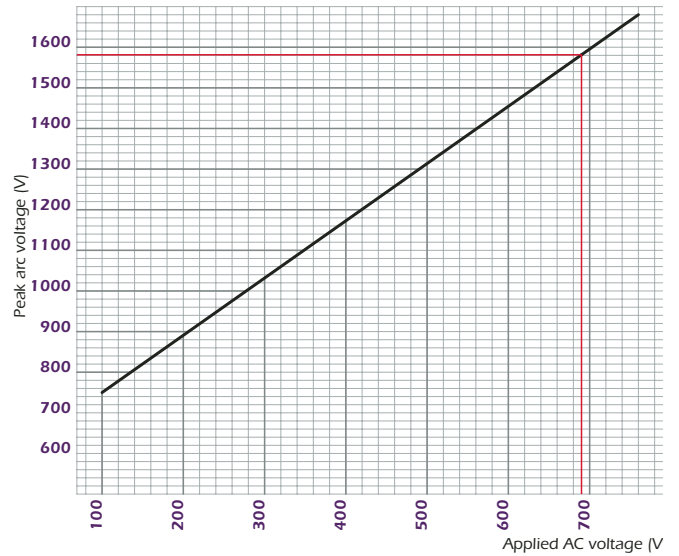

Clearing I²t and arcing time correction factor vs Applied AC voltage size 3

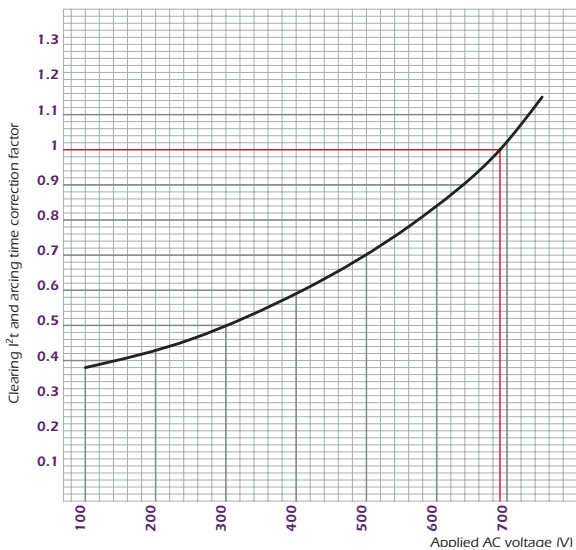

Watts loss vs % rated current size 3

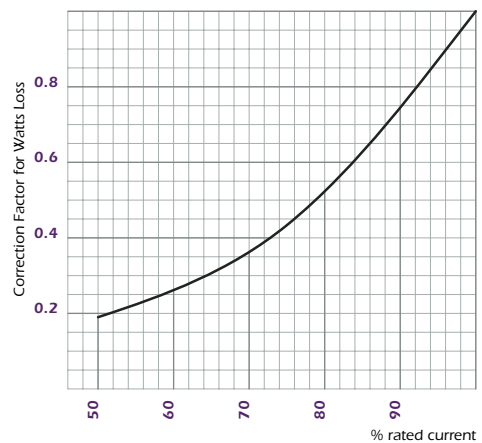



Fuse holders and switch-disconnectors



Fuse holder
unprotect



Fuse holder
finger safe



Switch
Disconnector



Fuse switch
Disconnector
fast handle

Type	Characteristics	Poles	Size 000/00	Size 1	Size 2	Size 3	Mounting
Fuse holder	Unprotected ⁽⁴⁾ screw connection for hole and bar terminals for 35mm Din rail	1	R216192	A223008	E211075	X213644	DIN Rail
Fuse holder		2	F218758	G200796	V211595	B214154	DIN Rail
Fuse holder		3	V229121	Y201340	D212109	F214664	DIN Rail
Fuse holder		4	Z223007	H201855	R212627	K215174	DIN Rail
Fuse holder	Unprotected ⁽⁴⁾ screw connection for holes or bar terminals for panels	1	F215170	E218757	F201853	W213643	Screw
Fuse holder		2	A217212	F222484	S211593	D214662	Screw
Fuse holder		3	W229122	Y223006	B212107	H215172	Screw
Fuse holder		4	S219275	X201339	C213143	L215681	Screw
Fuse holder	Finger Safe Protected for DIN rail	1	S218240	P226724	R226726	T226728	DIN Rail
Fuse holder		3	S229119	Q226725	S226727	V226729	DIN Rail
		3	T229120				Screw
Switch disconnector Linocur	Horizontal	2xM8	1	N216626			
Switch disconnector Linocur		S/BL	1	N222882			
Switch disconnector Linocur		2xM8	2	B218685			
Switch disconnector Linocur		S/BL	2	C201781			
Switch disconnector Linocur		2xM8	3	Y212035			
Switch disconnector Linocur		S/BL	3	W213574			
Multibloc	clamp connection	3	J229295				Screw
Multibloc	screw connection	3	H229294	S229878			Screw
Fused switch discon. front handle	ITC 63 III complete ⁽⁵⁾	3	M235347				
Fused switch discon. front handle	ITC 160 III complete ⁽⁵⁾	3	T235353				
Fused switch discon. front handle	ITC 250 III complete ⁽⁵⁾	3		A235359 + Y210770 ⁽³⁾			
Fused switch discon. front handle	ITC 400 III complete ⁽⁵⁾	3			N235371 + Y210770 ⁽³⁾		
Fused switch discon. front handle	ITC 630 III complete ⁽⁵⁾	3				B235383 + Y210770 ⁽³⁾	
Fused switch discon. front handle	ITC 800 III complete ⁽⁵⁾	3				W229674 + Y210770 ⁽³⁾	

(3) Necessary heighten for the use of microswitch (MSNHB2 or MSNHB6)

(4) Unprotected against accidental contact-not finger safe

(5) Finger safe (IP20)

“Warning : for all holders, please check maximum fuse and fuse holder operating limit”.

Derating

size 00 Max I_{RMS} 110A for the 125A model

size 00 Max I_{RMS} 140A for the 160A model

size 000 Max I_{RMS} 95A for the 100A model

no derating for other models



Fuse monitoring

The most suitable and reliable solution for monitoring the Protistor® NH gS fuses.

No need of microswitch !!

Snap-on mounting on ITC switch disconnectors and screw mounting on NH bases


For technical data, refer to GP009 Fuse Monitoring brochure.



on NH base



on ITC 250



Microswitches

Main Characteristics

Catalog Number	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating (A)	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MSNHB2	1000 V	20V 100 mA	5A	50Hz DC	4A -	4A -	5A -	- -	5A 2A	5A 0,4A	12 kV 8 kV	16 kV 13 kV	V0
MSNHB6	1000 V	20V 50 mA	10A	50/60Hz DC	10A 8A	10A 0,4A	10A 0,2A	10A 4A	10A 0,2A	10A 0,1A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)



** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Catalog Number	Ref. Number	Weight	Pack.
MSNHB2	Consult us	30	3
MSNHB6	Consult us	26	3

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.


In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

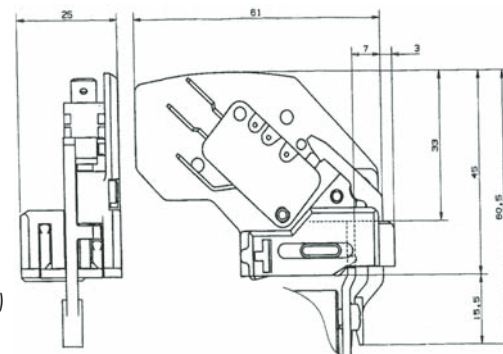

6.3 mm clips



2.8 mm clips

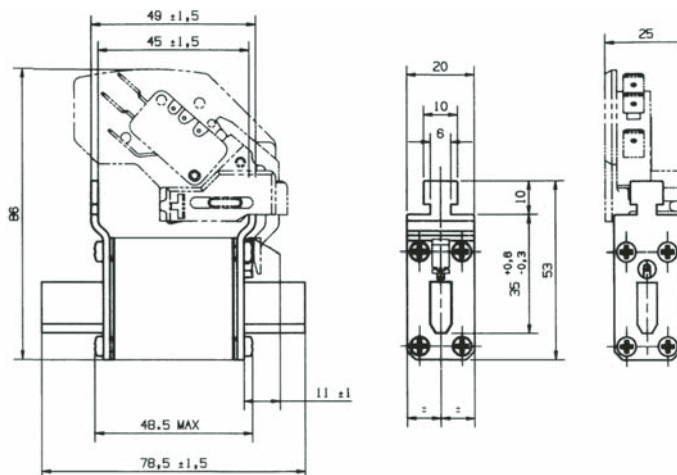




Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Ferraz Shawmut PSC-URD 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic. All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

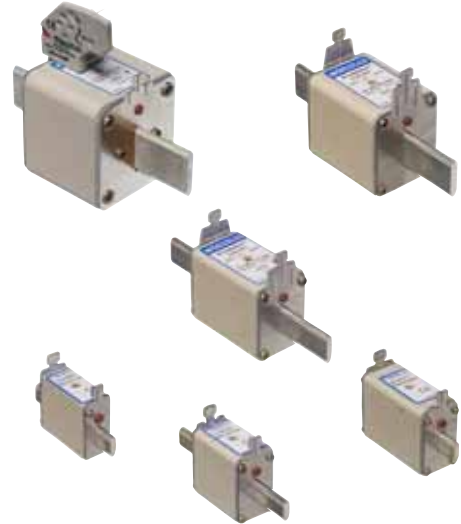

Features/Benefits

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Beige melted



Red non melted

Ratings

AC: up to 1000 A
500 - 690 VAC
80-170 kA IR

DC: Consult Factory

Approvals

AC: Tested to IEC 269.4

Features

- Ultra fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

Innovations

- Double indicator (Visual and mechanical).
- Largest range of the market
- Connexion improvement between trip indicator - Micro switch
- Cd / Pb free
- Low voltage indicator - 50V

Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms (A ² s)	Total I ² t @ 690 V (A ² s)	Pn: Power losses (W) PV 43620 0,8In	Breaking capacities @ Un kA
690 V CEI 700V UL	000	URD	16	10	48	1,0	80
		URD	20	15	90	1,5	
		URD	25	22	130	2,0	
		URD	32	45	270	2,5	
		URD	40	69	400	4,0	
		URD	50	107	630	5,0	
		URD	63	220	1 300	6,0	
		URD	80	350	2 000	8,0	
		URD	100	720	4 300	9,5	
		URD	125	1 400	8 200	10,5	
		URD	160	2 100	12 200	15,0	
		URD	200	3 900	22 700	18,0	
URD	250	7 600	44 400	22,0			
500V CEI 550V UL		URD	315	15 400	90 700	30,0	
690 V CEI 700V UL	00	URD	20	15	90	1,5	170
		URD	25	22	130	2,0	
		URD	32	45	270	2,5	
		URD	40	69	400	4,0	
		URD	50	110	630	5,0	
		URD	63	220	1 300	6,0	
		URD	80	350	2 000	8,0	
		URD	100	720	4 300	8,5	
		URD	125	1 390	8 200	10,0	
		URD	160	2 100	12 200	14,0	
		URD	200	3 900	22 700	17,0	
		URD	250	7 600	44 400	20,0	
690 V CEI 700V UL	0	URD	315	15 400	90 700	29,0	170
		URD	32	32	170	9,5	
		URD	40	53	280	10,0	
		URD	50	87	470	10,5	
		URD	63	130	700	11,5	
		URD	80	180	970	12,5	
		URD	100	390	2 080	15,0	
		URD	125	720	3 890	18,0	
		URD	160	1 550	8 320	22,0	
		URD	200	2 950	15 900	27,0	
		URD	250	5 560	29 900	33,0	
		URD	315	11 600	62 300	40,0	

Time/current characteristics

Cut off characteristics

Total I²t and total operating time

Other curves

Fuse holder derating

} See following pages




Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Voltage	Size	Type	Rating In (A)	Pre-Arcing I _t @ 1ms (A ² s)	Total I ² t @ 690 V (A ² s)	Pn: Power losses (W) PV 43620 0,8In	Breaking capacities @ Un kA
690 V CEI 700V UL	1	URD	63	130	700	18	170
		URD	80	220	1 170	21,5	
		URD	100	290	1 570	23,0	
		URD	125	620	3 320	26,0	
		URD	160	1 170	6 270	29,0	
		URD	200	2 470	13 300	33,0	
		URD	250	4 670	25 100	37,0	
		URD	315	9 570	51 400	42,0	
		URD	350	13 400	72 300	44,0	
690 V CEI 700V UL	2	URD	160	960	5 180	38	170
		URD	200	1 710	9 220	42	
		URD	250	3 480	18 700	46,5	
		URD	315	6 860	36 900	54,0	
		URD	350	9 570	51 400	58,0	
		URD	400	13 400	72 300	62,5	
		URD	450	21 000	113 000	69,0	
		URD	500	27 400	147 000	73,0	
		URD	550	38 300	206 000	78,0	
		URD	630	58 700	315 000	85,0	
690 V CEI 700V UL	3	URD	315	5 251	28 200	57,0	170
		URD	350	7 562	40 600	58,0	
		URD	400	10 500	56 500	65,5	
		URD	450	15 700	84 300	70,0	
		URD	500	22 200	119 000	75,0	
		URD	550	30 200	163 000	80,0	
		URD	630	42 000	226 000	89,0	
		URD	700	61 700	332 000	100,0	
		URD	800	88 900	478 000	112,0	
		URD	900	123 900	666 000	125,0	
URD	1000	178 400	959 000	140,0			

Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Size	Designation	Reference Number	Catalog Number	Weight	Pack. (g)		
000	6,9 URD 000 PV 0016	P320035	NH000UD 69V 16PV	135	3		
	6,9 URD 000 PV 0020	R320037	NH000UD 69V 20PV				
	6,9 URD 000 PV 0025	T320039	NH000UD 69V 25PV				
	6,9 URD 000 PV 0032	Y320043	NH000UD 69V 32PV				
	6,9 URD 000 PV 0040	C320047	NH000UD 69V 40PV				
	6,9 URD 000 PV 0050	G320051	NH000UD 69V 50PV				
	6,9 URD 000 PV 0063	L320055	NH000UD 69V 63PV				
	6,9 URD 000 PV 0080	Q320059	NH000UD 69V 80PV				
	6,9 URD 000 PV 0100	V320063	NH000UD 69V 100PV				
	6,9 URD 000 PV 0125	X320065	NH000UD 69V 125PV				
	6,9 URD 000 PV 0160	B320069	NH000UD 69V 160PV				
	6,9 URD 000 PV 0200	D320071	NH000UD 69V 200PV				
	6,9 URD 000 PV 0250	H320075	NH000UD 69V 250PV				
	5 URD 000 PV 0315	M320079	NH000UD 50V 315PV				
	Neutral	Z218269					10
Extraction puller	P215592	NH HANDLE		1			
00	6,9 URD 00 PV 0020	A320137	NH00UD 69V 20PV	200	3		
	6,9 URD 00 PV 0025	C320139	NH00UD 69V 25PV				
	6,9 URD 00 PV 0032	G320143	NH00UD 69V 32PV				
	6,9 URD 00 PV 0040	L320147	NH00UD 69V 40PV				
	6,9 URD 00 PV 0050	Q320151	NH00UD 69V 50PV				
	6,9 URD 00 PV 0063	V320155	NH00UD 69V 63PV				
	6,9 URD 00 PV 0080	Z320159	NH00UD 69V 80PV				
	6,9 URD 00 PV 0100	D320163	NH00UD 69V 100PV				
	6,9 URD 00 PV 0125	F320165	NH00UD 69V 125PV				
	6,9 URD 00 PV 0160	K320169	NH00UD 69V 160PV				
	6,9 URD 00 PV 0200	M320171	NH00UD 69V 200PV				
	6,9 URD 00 PV 0250	R320175	NH00UD 69V 250PV				
	6,9 URD 00 PV 0315	W320179	NH00UD 69V 315PV				
	Neutral	Z218269					10
	Extraction puller	P215592	NH HANDLE				1
0	6,9 URD 0 PV 0032	Q320243	NH0UD 69V 32PV	250	3		
	6,9 URD 0 PV 0040	V320247	NH0UD 69V 40PV				
	6,9 URD 0 PV 0050	Z320251	NH0UD 69V 50PV				
	6,9 URD 0 PV 0063	D320255	NH0UD 69V 63PV				
	6,9 URD 0 PV 0080	H320259	NH0UD 69V 80PV				
	6,9 URD 0 PV 0100	M320263	NH0UD 69V 100PV				
	6,9 URD 0 PV 0125	P320265	NH0UD 69V 125PV				
	6,9 URD 0 PV 0160	T320269	NH0UD 69V 160PV				
	6,9 URD 0 PV 0200	W320271	NH0UD 69V 200PV				
	6,9 URD 0 PV 0250	A320275	NH0UD 69V 250PV				
	6,9 URD 0 PV 0315	E320279	NH0UD 69V 315PV				
	Neutral	Z219304					10
	Extraction puller	P215592	NH HANDLE				1

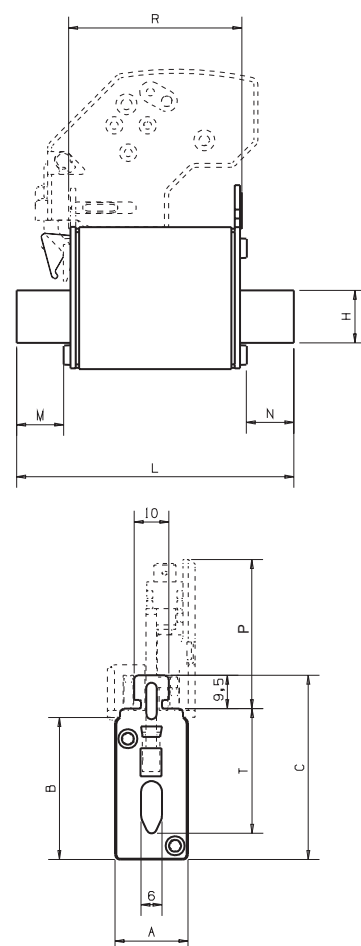

Microswitches

MS 4L 2-5 B6 + PRES	F210156	(6,3mm clips)
MS 4L 2-5 B2 + PRES	G210157	(2.8 mm clips)

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting
In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

Microswitches supplied separately


Size	A	B	C	H	L	M	N	P	R	T
000	20,8	40,5	52,5	15	79	13,5	13,5	43,4	49,5	35
	0.82"	1.59"	2.07"	0.59"	3.11"	0.53"	0.53"	1.71"	1.95"	1.38"
00	29,5	47,5	59,5	15	79	13,1	13,1	43,4	50	35
	1.16"	1.87"	2.34"	0.59"	3.11"	0.52"	0.52"	1.71"	1.97"	1.38"
0	29,5	47,5	59,5	15	125	29,1	29,1	43,4	66	35
	1.16"	1.87"	2.34"	0.59"	4.92"	1.15"	1.15"	1.71"	2.60"	1.38"

Fuse holder solution, see Gear and Fuse gear section.



Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Size	Designation	Reference Number	Catalog Number	Weight	Pack. (g)	
1	6,9 URD 1 PV 0063	M320355	NH1UD 69V 63PV	430	3	
	6,9 URD 1 PV 0080	K320399	NH1UD 69V 80PV			
	6,9 URD 1 PV 0100	W320363	NH1UD 69V 100PV			
	6,9 URD 1 PV 0125	Y320365	NH1UD 69V 125PV			
	6,9 URD 1 PV 0160	C320369	NH1UD 69V 160PV			
	6,9 URD 1 PV 0200	E320371	NH1UD 69V 200PV			
	6,9 URD 1 PV 0250	J320375	NH1UD 69V 250PV			
	6,9 URD 1 PV 0315	N320379	NH1UD 69V 315PV			
	6,9 URD 1 PV 0350	P320380	NH1UD 69V 350PV			
	6,9 URD 1 PV 0400	S320383	NH1UD 69V 400PV			
	Neutral	A219834				5
	Extraction puller	P215592	NHHANDLE			1
	2	6,9 URD 2 PV 0160	L320469			NH2UD 69V 160PV
6,9 URD 2 PV 0200		N320471	NH2UD 69V 200PV			
6,9 URD 2 PV 0250		S320475	NH2UD 69V 250PV			
6,9 URD 2 PV 0315		X320479	NH2UD 69V 315PV			
6,9 URD 2 PV 0350		Y320480	NH2UD 69V 350PV			
6,9 URD 2 PV 0400		B320483	NH2UD 69V 400PV			
6,9 URD 2 PV 0450		D320485	NH2UD 69V 450PV			
6,9 URD 2 PV 0500		F320487	NH2UD 69V 500PV			
6,9 URD 2 PV 0550		G320488	NH2UD 69V 550PV			
6,9 URD 2 PV 0630		H320489	NH2UD 69V 630PV			
6,9 URD 2 PV 0700		J320490	NH2UD 69V 700PV			
Neutral		N222514		5		
Extraction puller		P215592	NHHANDLE	1		
3	6,9 URD 3 PV 0315	F320579	NH3UD 69V 315PV	750	3	
	6,9 URD 3 PV 0350	G320580	NH3UD 69V 350PV			
	6,9 URD 3 PV 0400	K320583	NH3UD 69V 400PV			
	6,9 URD 3 PV 0450	M320585	NH3UD 69V 450PV			
	6,9 URD 3 PV 0500	P320587	NH3UD 69V 500PV			
	6,9 URD 3 PV 0550	Q320588	NH3UD 69V 550PV			
	6,9 URD 3 PV 0630	R320589	NH3UD 69V 630PV			
	6,9 URD 3 PV 0700	S320590	NH3UD 69V 700PV			
	6,9 URD 3 PV 0800	T320591	NH3UD 69V 800PV			
	6,9 URD 3 PV 0900	V320592	NH3UD 69V 900PV			
	6,9 URD 3 PV 1000	W320593	NH3UD 69V 1000PV			
	Neutral	E223035				51
	Extraction puller	P215592	NHHANDLE			

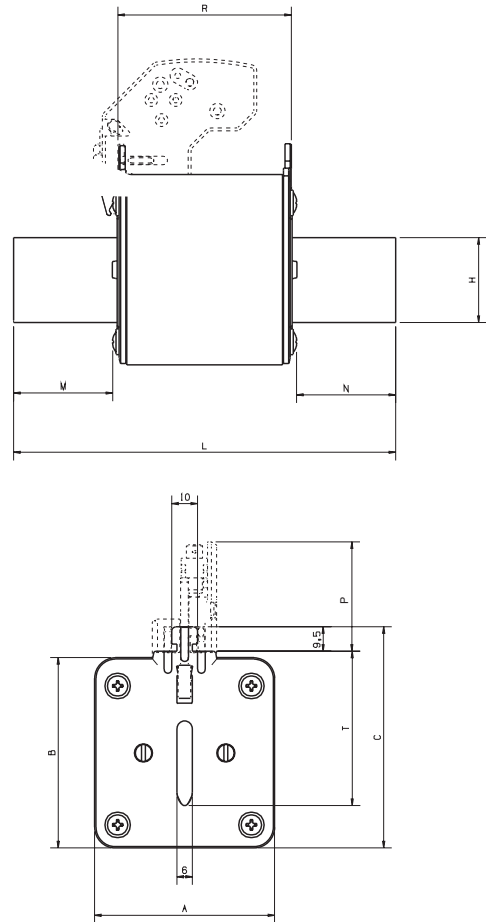

Microswitches

MS 4L 2-5 B6 + PRES	F210156	(6,3mm clips)
MS 4L 2-5 B2 + PRES	G210157	(2.8 mm clips)

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting. In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

Microswitches supplied separately

Size	A	B	C	H	L	M	N	P	R	T
1	39,5	52,5	64,5	20	135	32,1	32,1	43,4	68	40
	1.56"	2.07"	2.54"	0.79"	5.32"	1.26"	1.26"	1.71"	2.68"	1.57"
2	51	60	72	26	150	38,85	38,85	43,4	68	48
	2.01"	2.36"	2.85"	1.02"	5.91"	1.53"	1.53"	1.71"	2.68"	1.89"
3	70	74	86	33	150	38,85	38,85	43,4	68	60
	2.76"	2.91"	3.39"	1.30"	5.91"	1.53"	1.53"	1.71"	2.68"	2.36"



Fuse holder solution, see Gear and Fuse gear section.





Semiconductor (AC) fuses

Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3


Times/Current Characteristics

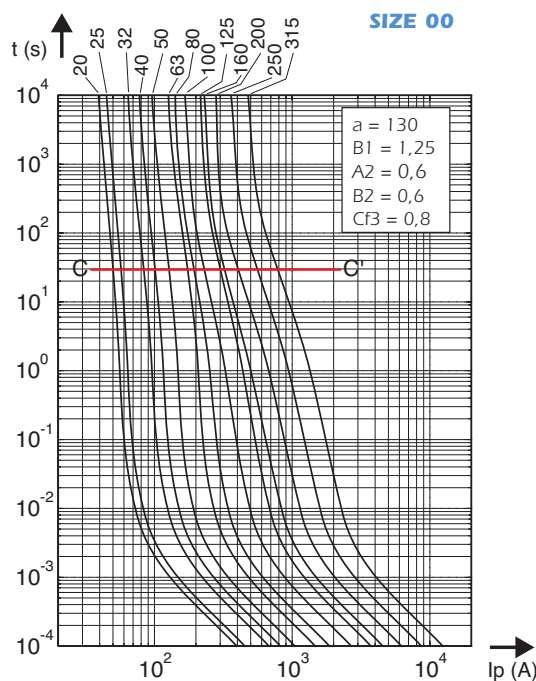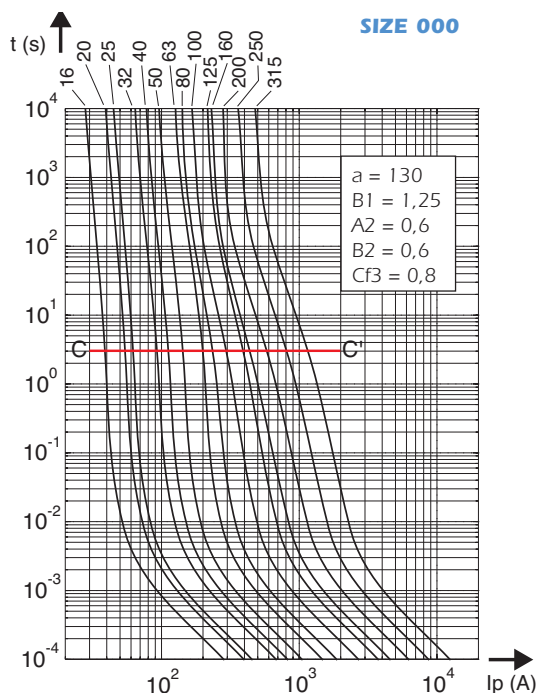


Cut off characteristics - Peak let thru current

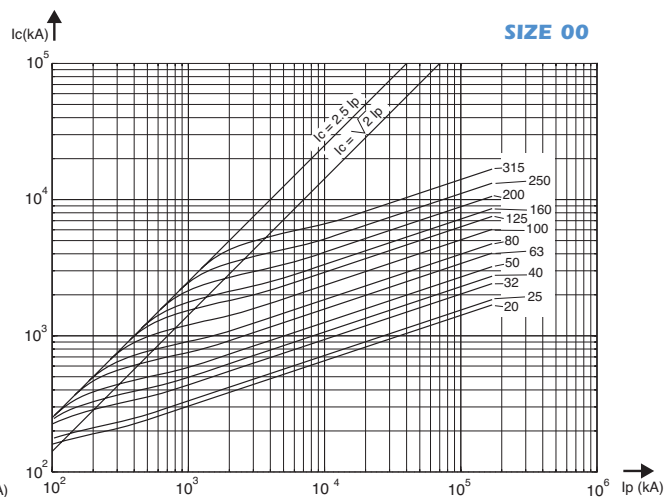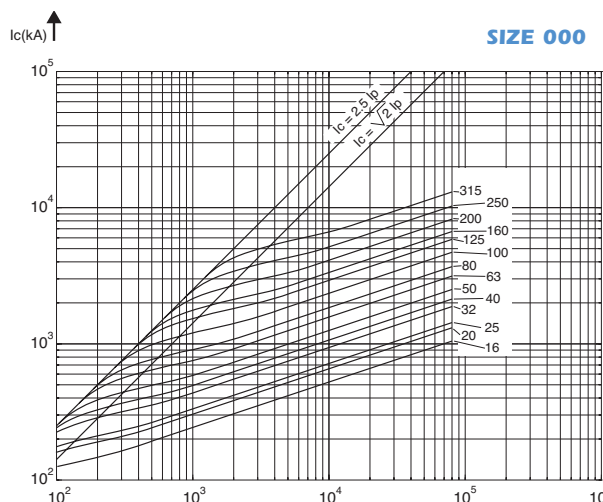

Total I²t and total operating time @ 690 V

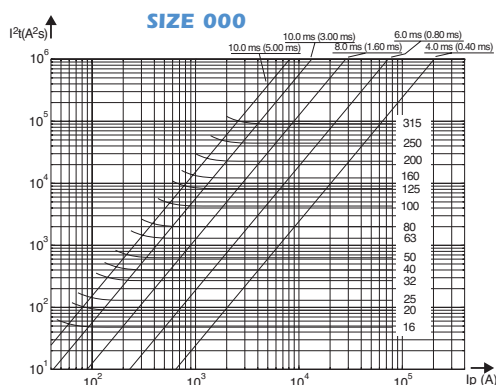

Value between parentheses pertain to prearcing I²t


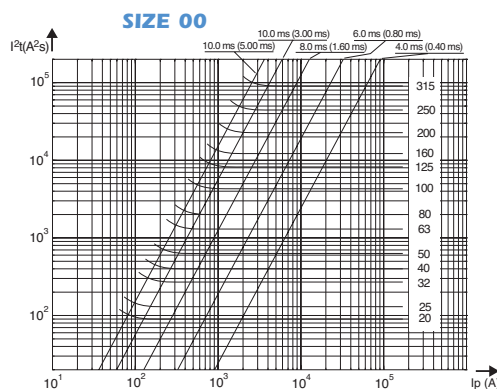


Semiconductor (AC) fuses





Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3


Times/Current Characteristics

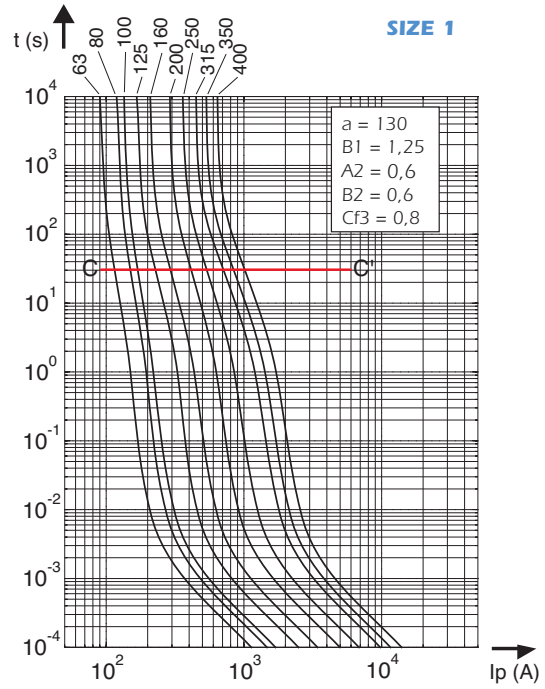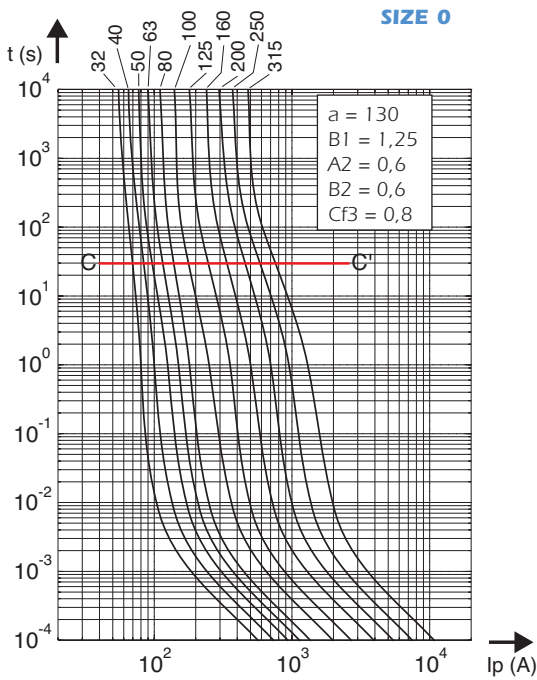


Cut off characteristics - Peak let thru current

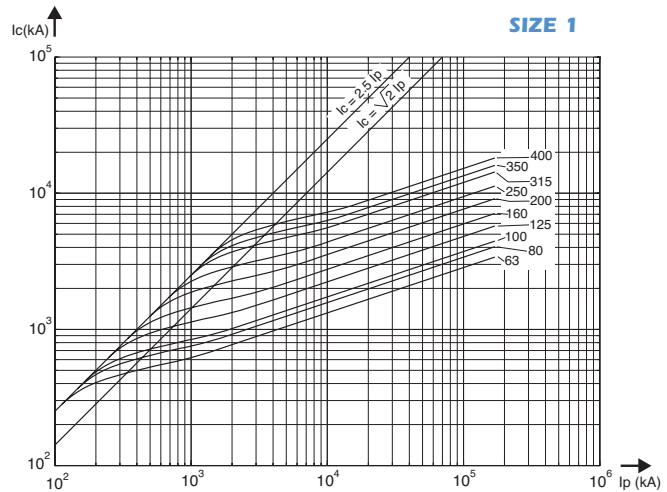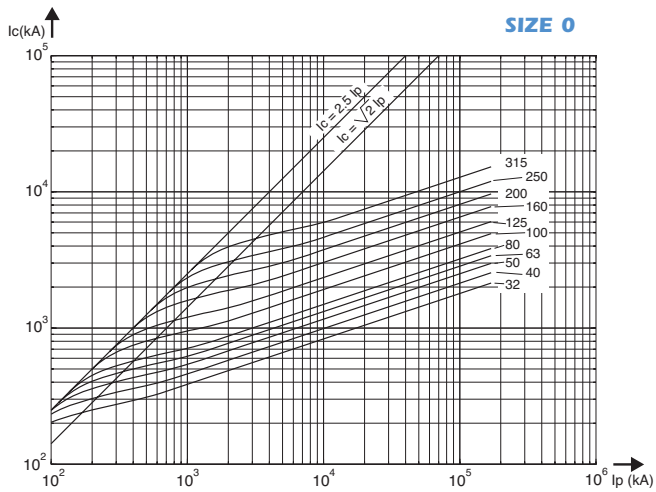

Total I²t and total operating time @ 690 V


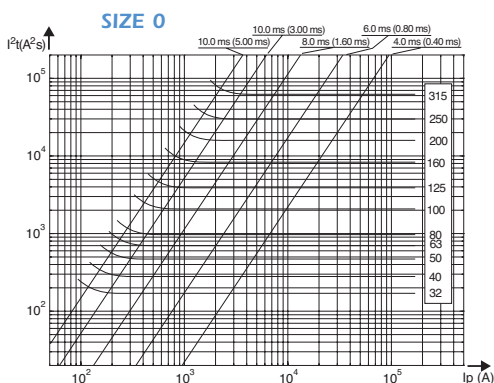


Value between parentheses pertain to pre-arcing I²t


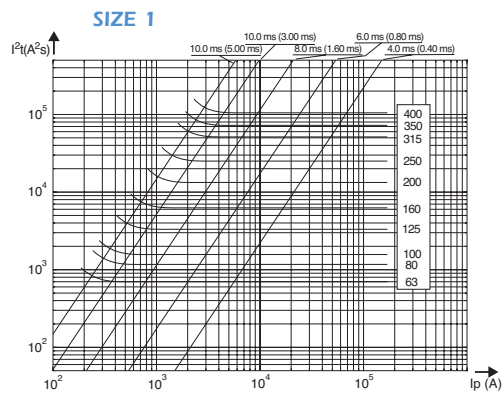


Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3



Times/Current Characteristics

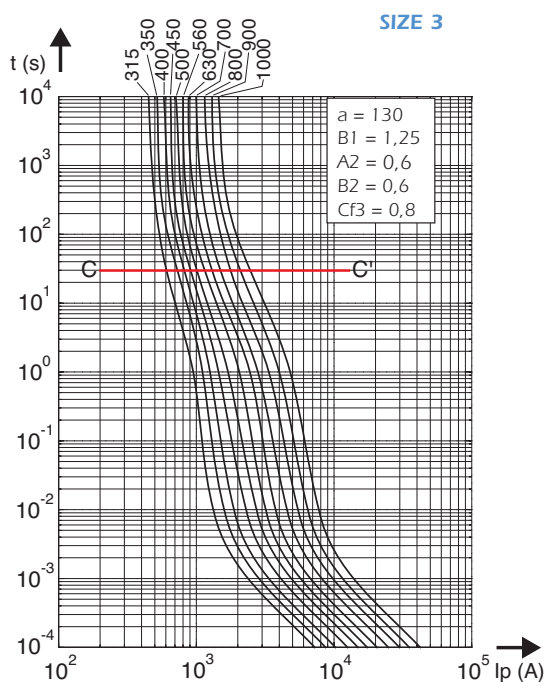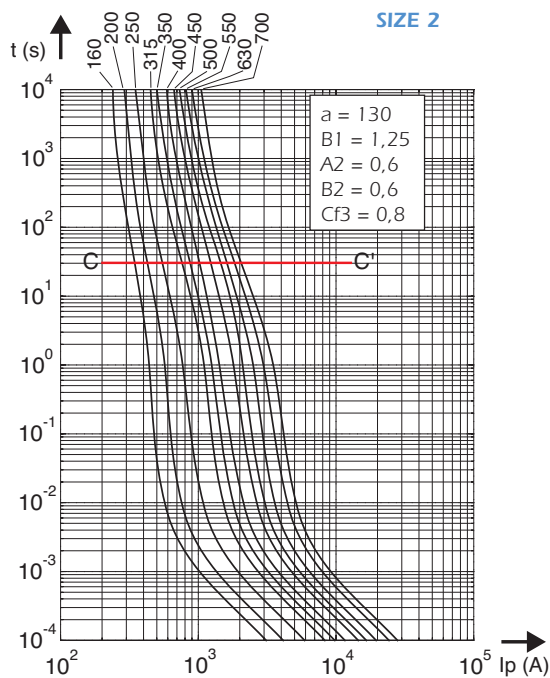

Cut off characteristics - Peak let thru current

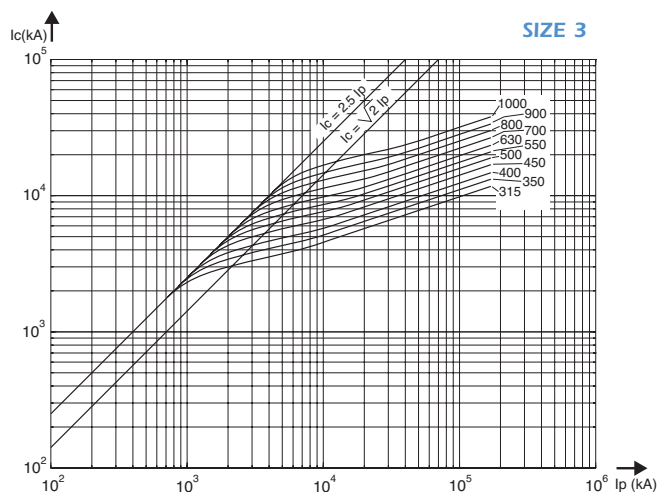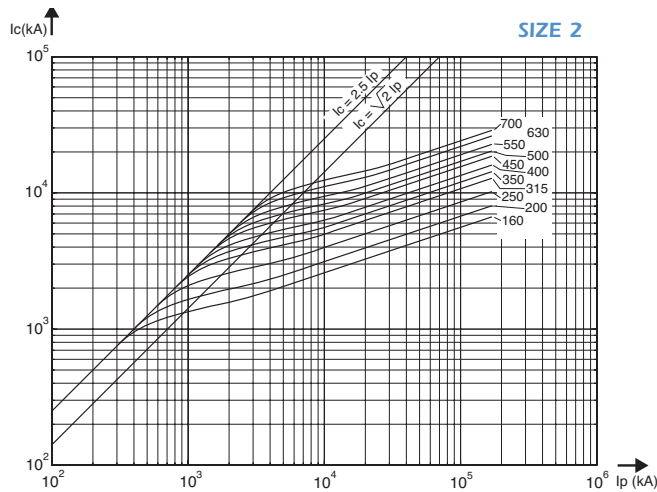

Total I²t and total operating time @ 690 V

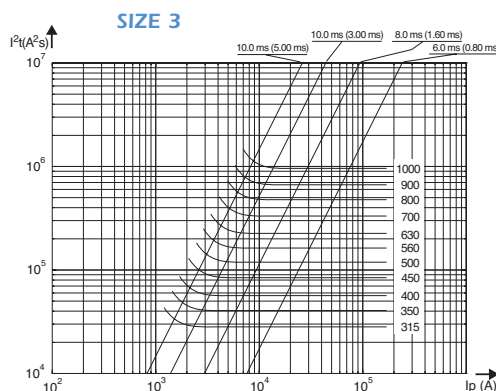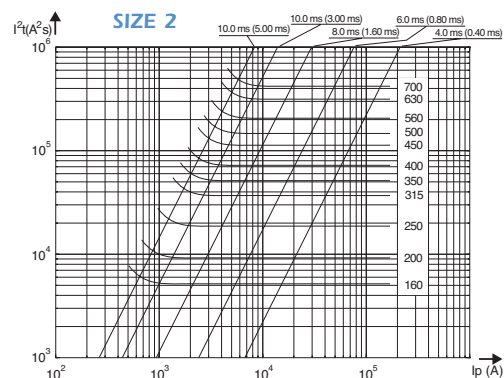


Value between parentheses pertain to prearcing I²t




Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3


$k=f(U)$
Multiplier coefficient
to calculate total I^2t
and total operating time

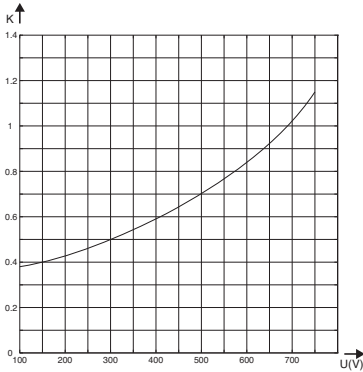

P/PN
Multiplier coefficient
to calculate the power
losses at various currents

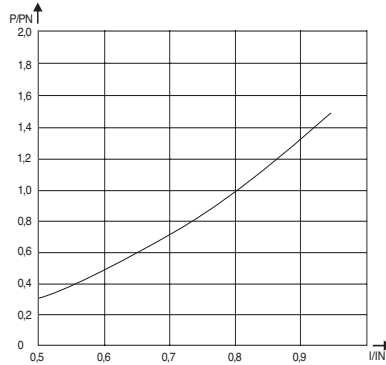

Peak arc voltage

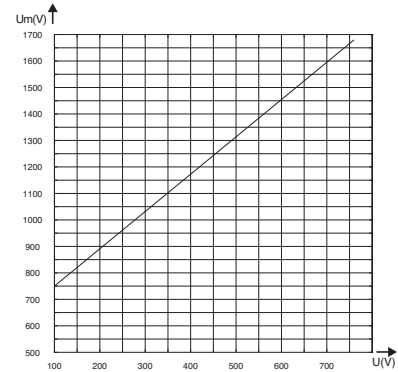

Derating in fuse holders

- 1- Derating for fuse holder unprotected
- 2- Derating for finger safe fuseholders and switch disconnecter Linocur
- 3- Derating for fused switch-disconnectors ITC
- 4- Derating for fused switch-disconnectors ITC with finger safe protection

	In	1	2	3	4
Size 000	16	1,00	1,00	1,00	1,00
	20	1,00	1,00	1,00	1,00
	25	1,00	1,00	1,00	1,00
	32	1,00	1,00	1,00	1,00
	40	1,00	1,00	1,00	1,00
	50	1,00	1,00	0,90	0,90
	63	1,00	1,00	0,90	0,90
	80	1,00	0,90	0,75	0,75
	100	1,00	0,90	0,75	0,75
	125	1,00	0,85	0,70	0,70
	160	0,90	0,75	0,60	0,60
	200	0,85	0,70	0,55	0,55
250	0,75	0,60	0,50	0,50	
315	0,70	0,55	0,45	0,45	
Size 00	20	1,00	1,00	1,00	1,00
	25	1,00	1,00	1,00	1,00
	32	1,00	1,00	1,00	1,00
	40	1,00	1,00	1,00	1,00
	50	1,00	1,00	1,00	1,00
	63	1,00	1,00	1,00	1,00
	80	1,00	0,95	0,95	0,95
	100	1,00	0,90	0,90	0,90
	125	1,00	0,85	0,85	0,85
	160	0,90	0,75	0,75	0,75
	200	0,85	0,70	0,70	0,70
	250	0,80	0,65	0,65	0,65
315	0,70	0,55	0,55	0,55	
Size 0	32	1,00			
	40	1,00			
	50	1,00			
	63	1,00			
	80	0,95			
	100	0,95			
	125	0,85			
	160	0,85			
	200	0,80			
	250	0,75			
	315	0,65			

	In	1	2	3	4	
Size 1	63	1,00	0,95	1,00	1,00	
	80	0,95	0,85	0,95	0,90	
	100	0,85	0,75	0,85	0,80	
	125	0,85	0,75	0,85	0,80	
	160	0,80	0,70	0,80	0,75	
	200	0,80	0,70	0,80	0,70	
	250	0,75	0,70	0,75	0,70	
	315	0,75	0,65	0,75	0,70	
	350	0,70	0,65	0,70	0,65	
	400	0,65	0,60	0,65	0,60	
	Size 2	160	0,90	0,80	0,90	0,85
		200	0,85	0,75	0,85	0,80
250		0,85	0,70	0,80	0,75	
315		0,75	0,65	0,70	0,65	
350		0,70	0,65	0,70	0,65	
400		0,70	0,60	0,70	0,60	
450		0,70	0,60	0,65	0,60	
500		0,70	0,60	0,65	0,60	
550		0,65	0,60	0,65	0,60	
630		0,65	0,55	0,65	0,60	
700		0,60	0,55	0,60	0,55	
Size 3		315	0,85	0,75	0,80	0,75
	350	0,85	0,75	0,80	0,75	
	400	0,80	0,70	0,75	0,70	
	450	0,80	0,70	0,75	0,70	
	500	0,75	0,65	0,75	0,70	
	550	0,75	0,65	0,75	0,70	
	630	0,70	0,60	0,70	0,65	
	700	0,70	0,60	0,65	0,60	
	800	0,65	0,55	0,60	0,55	
	900	0,60	0,50	0,60	0,55	
	1000	0,60	0,50	0,55	0,50	

Protistor® Square-body Fuses NH Plain Blades - 690 VAC aR - 690 VAC sizes 000 to 3

Fuse holders and switch-disconnector



Fuse holder
unprotect



Fuse holder
finger safe



Fuse switch
fast handle



Switch
Disconnecter



Type	Characteristics	Poles	Size 000/00	Size 0	Size 1	Size 2	Size 3
Fuse holder	Unprotected (4)	1	R216192	T218241	A223008	E211075	X213644
	screw connection	2	F218758	G218759	G200796	V211595	B214154
	for hole and bar terminals	3	V219277	W219278	Y201340	D212109	F214664
	for 35mm Din rail	4	Z223007	H222486	H201855	R212627	K215174
	Unprotected (4)	1	F215170	N216695	E218757	F201853	W213643
	screw connection	2	A217212	B217213	F222484	S211593	D214662
	for holes or bar terminals	3	F217723	G217724	Y223006	B212107	H215172
	for panels	4	S219275	R218239	X201339	C213143	L215681
	Finger Safe Protected	1	S218240	G226717	P226724	R226726	T226728
	screw connection	3	G222485	J226719A	Q226725	S226727	V226729
for hole and bar terminals							
Switch-disconnector	Horizontal Linocur AC23	1	N216626 N222882				
		2	B218685 C201781				
		3	Y212035 W213574				
Fused switch- disconnecter front handle	ITCP 160 III(4)	3	F210409				
	ITC 63 III complete (5)	3	G210824				
	ITC 160 III complete (5)	3	K227824				
	ITC 250 III complete (5)	3			N210830 + Y210770 (3)		
	ITC 400 III complete(5)	3				Q210832 + Y210770 (3)	
	ITC 630 III complete(5)	3					P210831 + Y210770 (3) W229674 + Y210770 (3)
ITC 800 III complete(5)	3						

(1) Impossible to use microswitch

(2) The axis of operation must be fragmented if the heighten (Y210770A) is not used - Internal or external control.

(3) Necessary heighten for the use of microswitch (F210156C or G210157C)

(4) Unprotected against accidental contact-not finger safe

(5) Finger safe

Warning : for all holders, please check maximum fuse and fuse holder operating limit".



Protistor® Square-body Fuses PSC gR/aR sizes 000/00 Microswitches for PSC sizes 000/00 for NH

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:

- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses




Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 μs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)



** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals

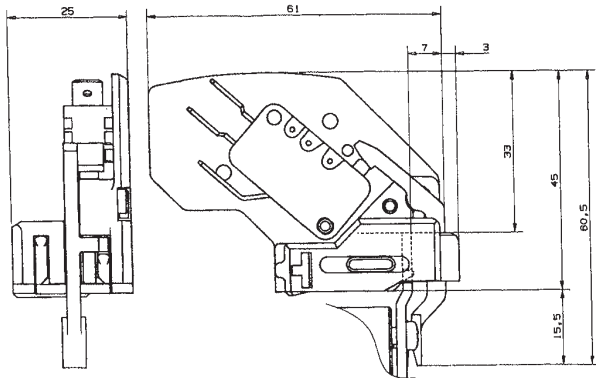

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.
In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

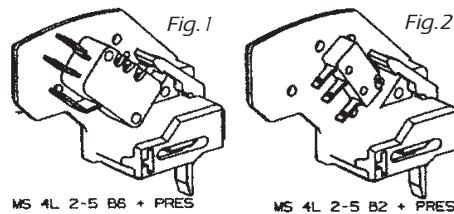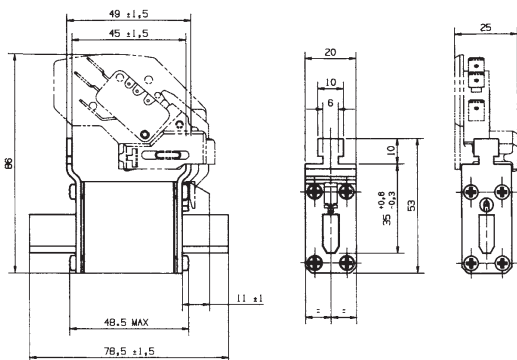

(1) 6.3 mm clips
(2) 2.8 mm clips



Protistor® Square-body Fuses PSC gR/aR sizes 000/00 Microswitches for PSC sizes 000/00 for NH

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FUSES:


- PSC sizes 000/00 (brackets) DIN43653
- NH Fuses (plain blades) see details in "General Purpose IEC Fuses" section
- NH plain blades 690 VAC Protistor square-body Fuses



Main Characteristics




Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Interrupting rating						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 μs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 4L 2-5 B2 + Pres	1000 V	20 V 100 mA	5 A	50 Hz DC	4A -	4A -	5A -	- -	5A 2 A	5 A 0,4 A	12 kV 8 kV	16 kV 13 kV	V0
MS 4L 2-5 B6 + Pres	1000 V	20 V 50 mA	10 A	50/60 Hz DC	10 A 8 A	10 A 0,4 A	10 A 0,2 A	10 A 4 A	10 A 0,2 A	10 A 0,1 A	8 kV	10 kV	V0

- * Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)
- ** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1
- *** Between power circuit and microswitch terminals

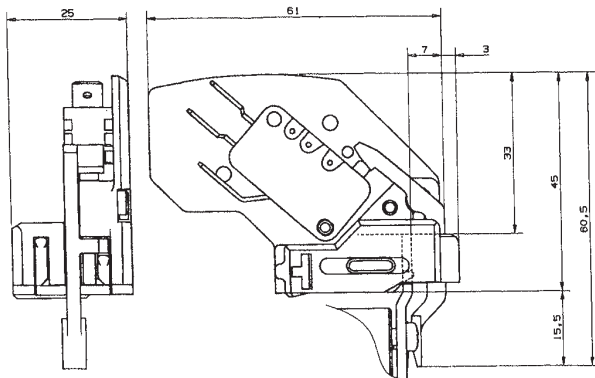

Designation	Ref. Number	Weight (g)	Pack.	Catalog Number
MS 4L 2-5 B6 + PRES (Fig. 1) (1)	F210156	30	3	MS 4L2-5B6PRES
MS 4L 2-5 B2 + PRES (Fig. 2) (2)	G210157	26	3	MS 4L2-5B2PRES

Automatically resettable, these microswitch systems indicate fuse presence (PRES) and proper mounting.
In case of improper mounting or fuse melting, this is indicated (terminal 1-4 closed)

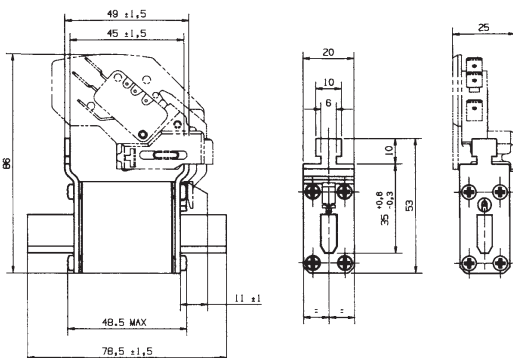

- (1) 6.3 mm clips
- (2) 2.8 mm clips

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment.

This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	gRB	125	1,06	6,2	18	35	18	35		
	gRB	160	2,4	14	19	38	19	38		
	gRB	200	5	29,5	21	41	21	42		
	gRB	250	9,5	56	23	46	24	48		
	gRB	315	18,5	108	27	53	27	54		
	gRB	350	23	140	29	58	30	60		
	gRB	400	38	225	30	59	31	61		
	gRB	450	62	360	30	59	31	61		
	gRB	500	78	460	32	64	34	67		
	gRB	200	4,2	25	23	45	23	45		
	gRB	250	8,5	50	25	49	25	50		
	gRB	315	17	100	28	55	29	57		
	gRB	350	23	140	29	58	30	60		
	gRB	400	34	200	32	63	33	65		
	gRB	450	47	280	34	67	35	70		
	gRB	500	68	400	35	69	36	72		
	gRB	550	84	495	38	75	39	78		
	gRB	630	124	730	41	81	43	86		
	gRB	700	155	910	45	89	48	95		
	gRB	315	12	69	33	66	34	67		
	gRB	350	17	100	34	68	35	69		
	gRB	400	27	160	36	71	37	73		
	gRB	450	34	200	40	79	41	82		
	gRB	500	47	280	42	84	43	86		
	gRB	550	68	400	42	84	44	87		
	gRB	630	102	600	45	89	47	94		
	gRB	700	139	820	47	94	50	100		
	gRB	800	227	1330	48	96	52	104		
	gRB	900	280	1640	55	109	60	119		
	gRB	1000	385	2270	58	115	64	127		

Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves

} see following pages

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment.

This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	71	gRB	125	1,06	6,2	18	35	18	35	
		gRB	160	2,4	14	19	38	19	38	
		gRB	200	5	29,5	21	41	21	42	
		gRB	250	9,5	56	23	46	24	48	
		gRB	315	18,5	108	27	53	27	54	
		gRB	350	23	140	29	58	30	60	
		gRB	400	38	225	30	59	31	61	
		gRB	450	62	360	30	59	31	61	
		gRB	500	78	460	32	64	34	67	
	72	gRB	200	4,2	25	23	45	23	45	
		gRB	250	8,5	50	25	49	25	50	
		gRB	315	17	100	28	55	29	57	
		gRB	350	23	140	29	58	30	60	
		gRB	400	34	200	32	63	33	65	
		gRB	450	47	280	34	67	35	70	
		gRB	500	68	400	35	69	36	72	
		gRB	550	84	495	38	75	39	78	
		gRB	630	124	730	41	81	43	86	
	73	gRB	700	155	910	45	89	48	95	
		gRB	315	12	69	33	66	34	67	
		gRB	350	17	100	34	68	35	69	
		gRB	400	27	160	36	71	37	73	
		gRB	450	34	200	40	79	41	82	
		gRB	500	47	280	42	84	43	86	
		gRB	550	68	400	42	84	44	87	
		gRB	630	102	600	45	89	47	94	
		gRB	700	139	820	47	94	50	100	
		gRB	800	227	1330	48	96	52	104	
		gRB	900	280	1640	55	109	60	119	
		gRB	1000	385	2270	58	115	64	127	

Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves


} see following pages

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC French 70-73 End contacts

Size	Designation	Reference Number	Weight (g)	Catalog Number
70	6,9 gRB 70 TTF 050	C301279	340	PC70GB69V50TF
	6,9 gRB 70 TTF 063	D301280		PC70GB69V63TF
	6,9 gRB 70 TTF 080	E301281		PC70GB69V80TF
	6,9 gRB 70 TTF 100	F301282		PC70GB69V100TF
	6,9 gRB 70 TTF 125	G301283		PC70GB69V125TF
	6,9 gRB 70 TTF 160	L301310		PC70GB69V160TF
	6,9 gRB 70 TTF 200	M301311		PC70GB69V200TF
	6,9 gRB 70 TTF 250	N301312		PC70GB69V250TF
	6,9 gRB 70 TTF 315	P301313		PC70GB69V315TF
6,9 gRB 70 TTF 350				
71	6,9 gRB 71 TTF 125	Q301314	520	PC71GB69V125TF
	6,9 gRB 71 TTF 160	R301315		PC71GB69V160TF
	6,9 gRB 71 TTF 200	S301316		PC71GB69V200TF
	6,9 gRB 71 TTF 250	T301317		PC71GB69V250TF
	6,9 gRB 71 TTF 315	N301427		PC71GB69V315TF
	6,9 gRB 71 TTF 350	V301318		PC71GB69V350TF
	6,9 gRB 71 TTF 400	W301319		PC71GB69V400TF
	6,9 gRB 71 TTF 450	X301320		PC71GB69V450TF
	6,9 gRB 71 TTF 500	S301707		PC71GB69V500TF
72	6,9 gRB 72 TTF 200	F301328	810	PC72GB69V200TF
	6,9 gRB 72 TTF 250	G301329		PC72GB69V250TF
	6,9 gRB 72 TTF 315	H301330		PC72GB69V315TF
	6,9 gRB 72 TTF 350	W301710		PC72GB69V350TF
	6,9 gRB 72 TTF 400	J301331		PC72GB69V400TF
	6,9 gRB 72 TTF 450	X301711		PC72GB69V450TF
	6,9 gRB 72 TTF 500	K301332		PC72GB69V500TF
	6,9 gRB 72 TTF 550	L301333		PC72GB69V550TF
	6,9 gRB 72 TTF 630	M301334		PC72GB69V630TF
6,9 gRB 72 TTF 700	Y301712	PC72GB69V700TF		
73	6,9 gRB 73 TTF 315	W301342	1220	PC73GB69V315TF
	6,9 gRB 73 TTF 350	B301715		PC73GB69V350TF
	6,9 gRB 73 TTF 400	X301343		PC73GB69V400TF
	6,9 gRB 73 TTF 450	Y301344		PC73GB69V450TF
	6,9 gRB 73 TTF 500	C301716		PC73GB69V500TF
	6,9 gRB 73 TTF 550	Z301345		PC73GB69V550TF
	6,9 gRB 73 TTF 630	A301346		PC73GB69V630TF
	6,9 gRB 73 TTF 700	B301347		PC73GB69V700TF
	6,9 gRB 73 TTF 800	D301717		PC73GB69V800TF
6,9 gRB 73 TTF 900	S301638	PC73GB69V900TF		
6,9 gRB 73 TTF 1000	F301719	PC73GB69V100TF		

Packaging: 3 pieces sizes 70 and 71 / 1 piece size 72 and 73

Microswitches: MS 7V 1-5	Ref.J310002	Standard NO-NC
MS 7V 1-5 UR	Ref.Z310039	Standard NO-NC
MS 7V 1-5 BS	Ref.K310003	Low level NO-NC
MS 7V 1-9 BS	Ref.P310007	Double pole NO-NC-low level
MS 7V 1-5 ET	Ref.S310010	Low level NO-NC-IP 50

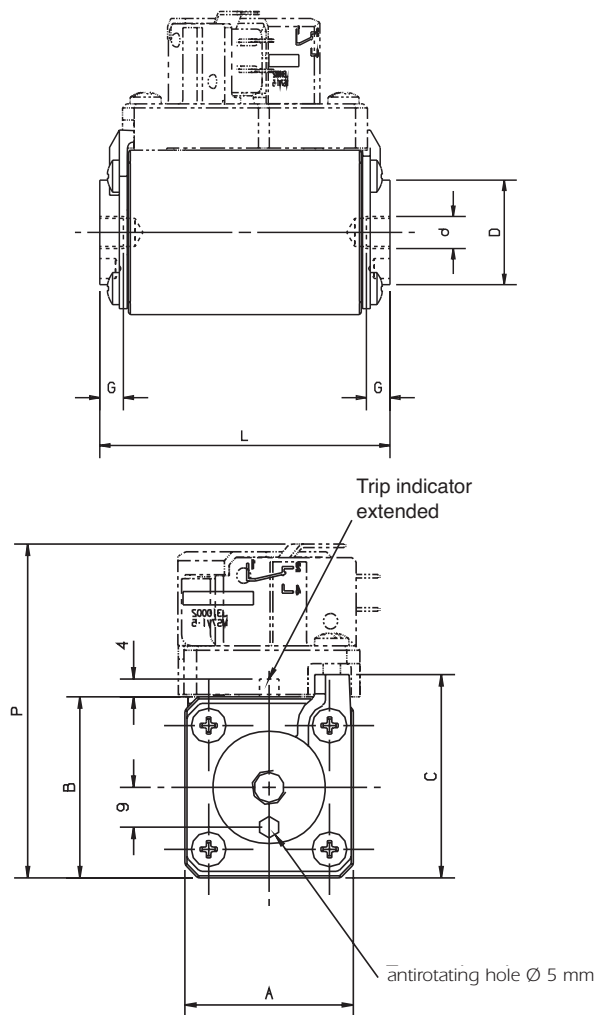

Threaded studs :

M8 x 20 mm: Réf.V099171
M10 x 30 mm: Réf.M099946
M12 x 35 mm: Réf.J099966
exists in other length

Threaded studs and Microswitches supplied separately

Size	A	B	C	D	L	d	G ²	P
70	39,8	41,8	46,5	26	74	M 8	6	81,8
	1.57"	1.65"	1.83"	1.02"	2.91"		0.24"	3.22"
71	51	51	56,5	30	74	M 8	9	85.5
	2.00"	2.00"	2.22"	1.18"	2.91"		0.35"	3.37"
72	60	60	65.5	38	74	M 10	9	93.6
	2.36"	2.36"	2.58"	1.50"	2.91"		0.35"	3.69"
73	74,4	74,4	78,5	46	74	M 12	9	107.6
	2.93"	2.93"	3.09"	1.81"	2.91"		0.35"	4.24"


Fuse holder solution, see Fuse gear section.




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Times/Current Characteristics


Size 70

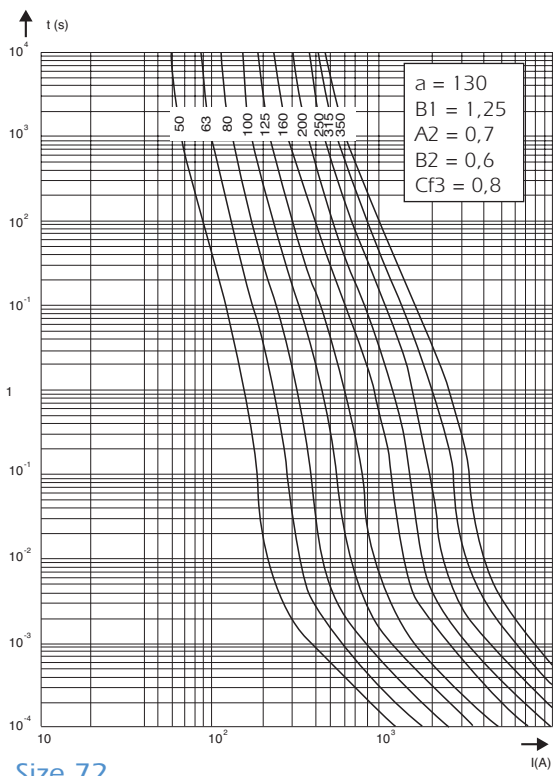


Size 71

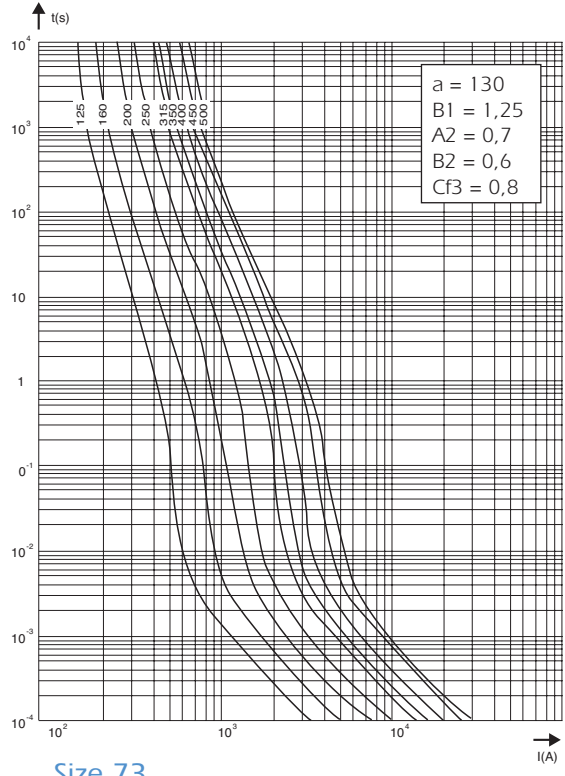

Size 72

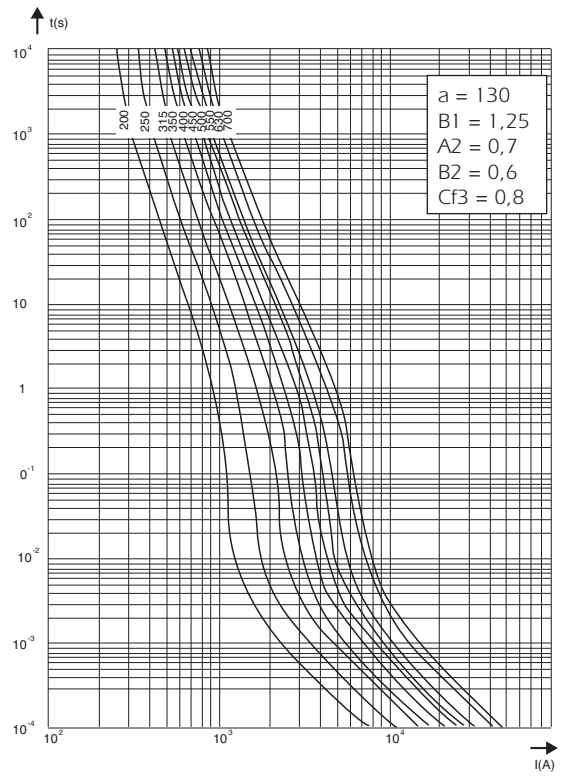

Size 73

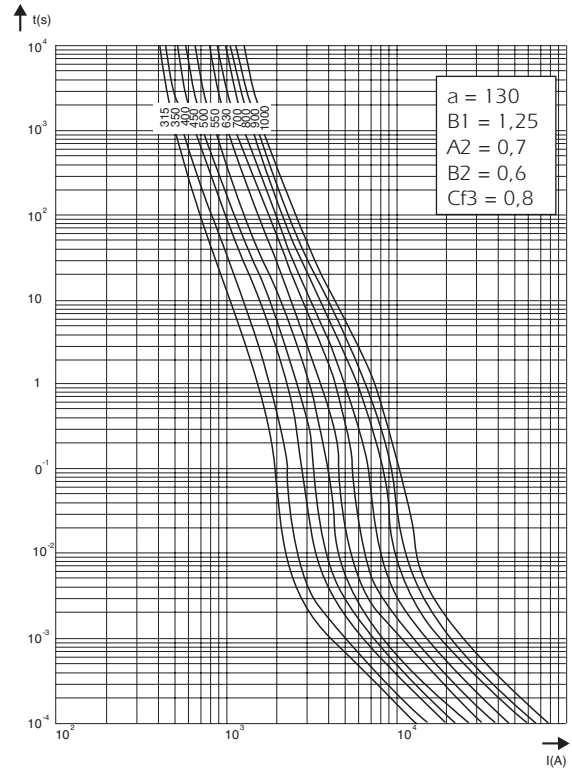





Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Cut off characteristics Peak let thru current


Size 70

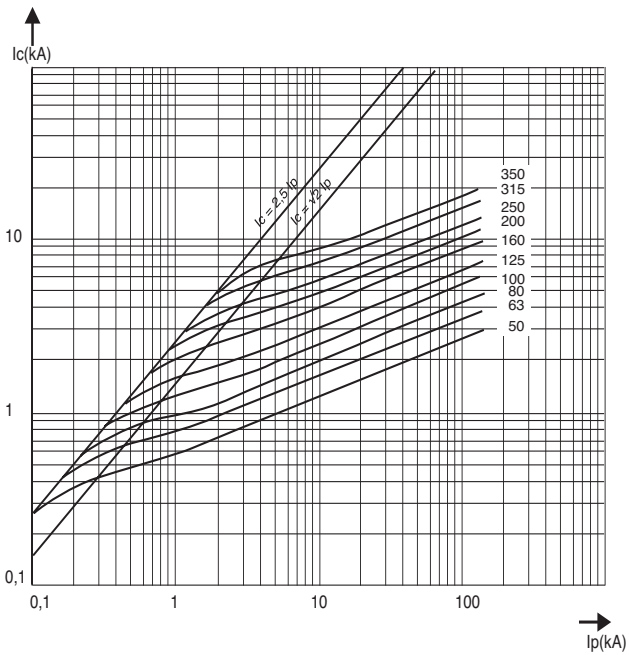


Size 71

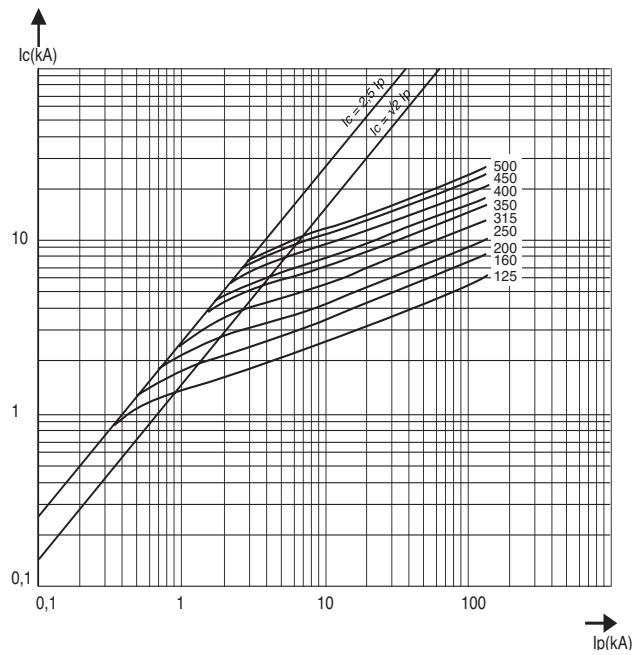

Size 72

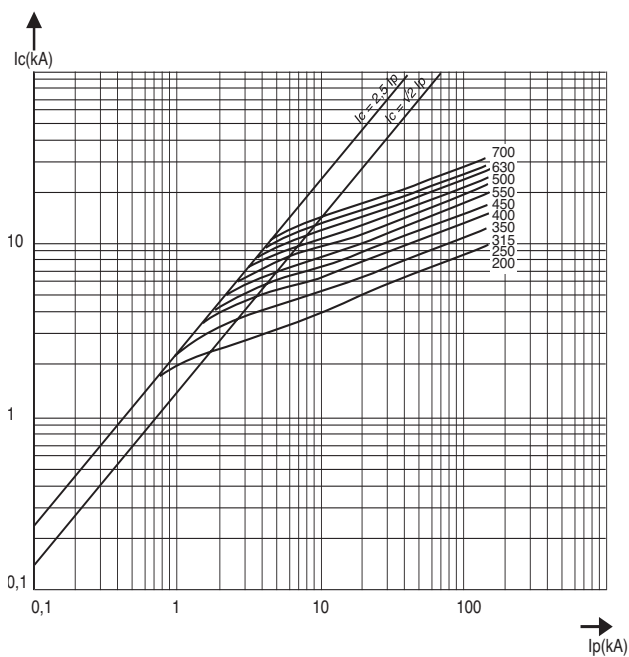

Size 73

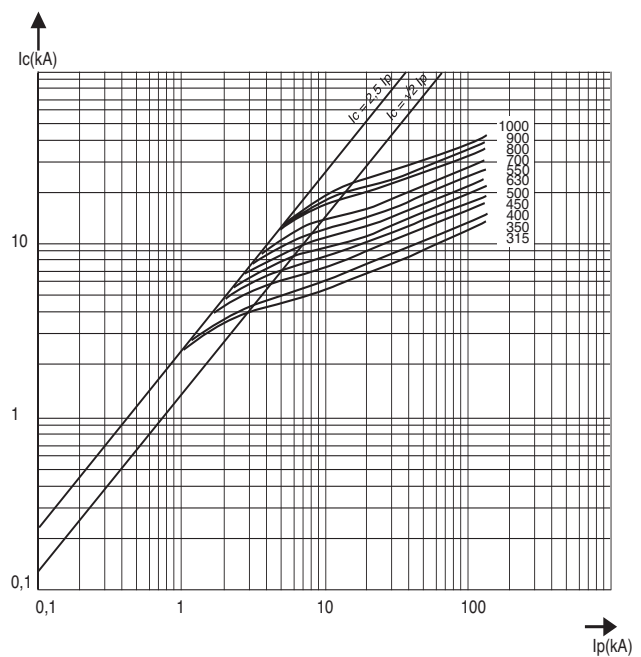




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


Total I²t and total operating time @ 690 V

Size 70

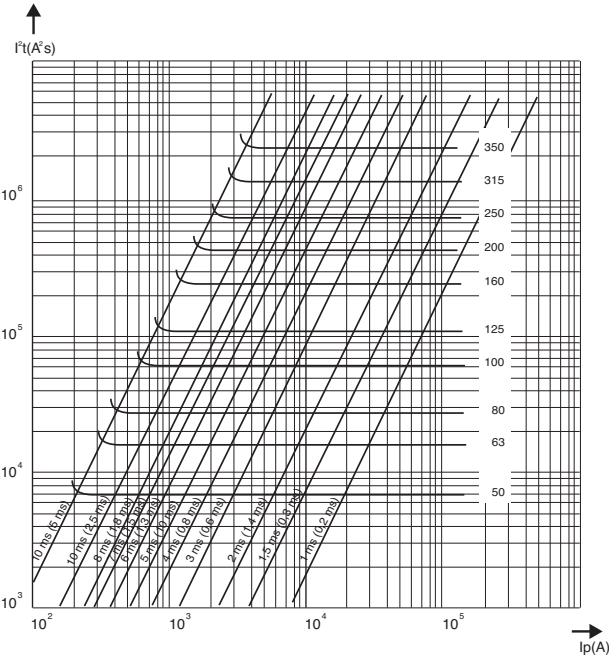


Value between parentheses pertain to prearcing I²t

Size 71

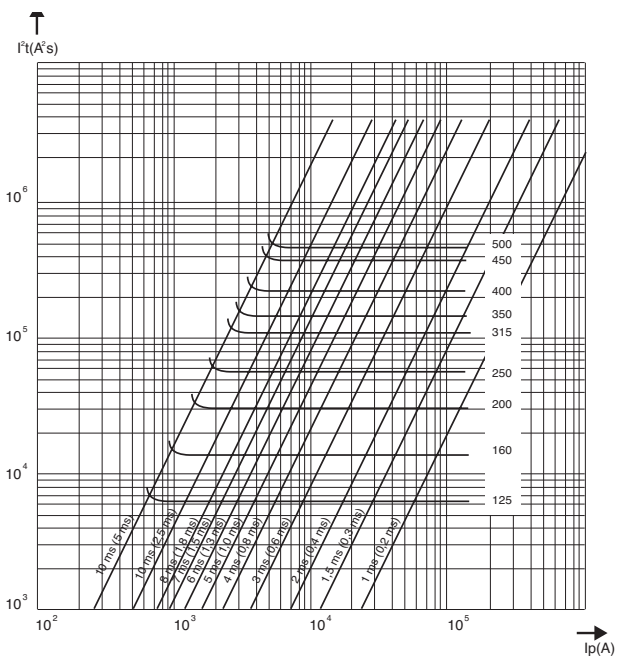


Size 72

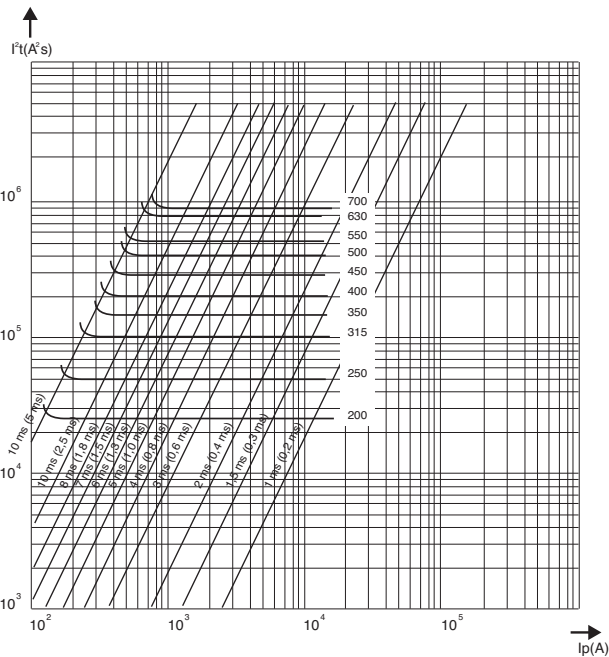

Value between parentheses pertain to prearcing I²t


Size 73

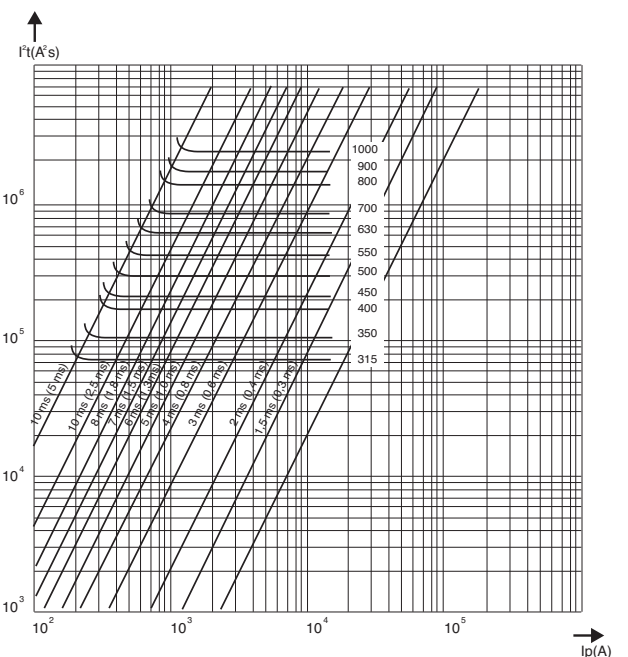




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


$k=f(U)$
Multiplier coefficient
to calculate total I^2t
and total operating time

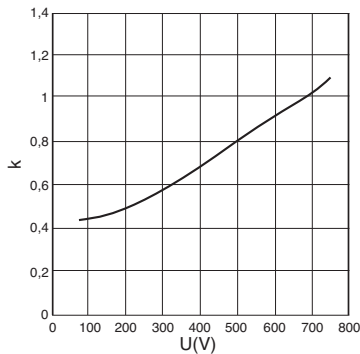

P/PN
Multiplier coefficient
to calculate the power
losses at various currents

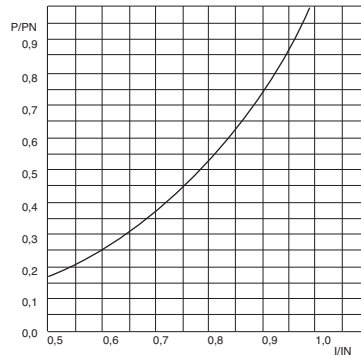

Peak arc voltage

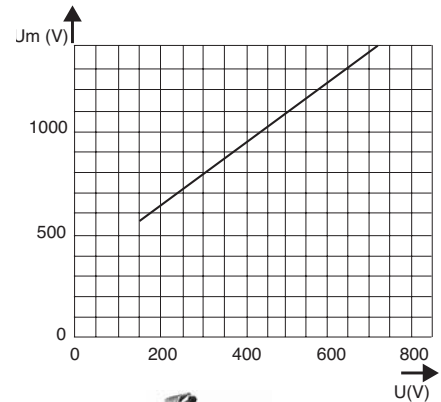

PA terminals fuse holder

Size	1 pole	2 poles	3 poles	4 poles	wall	separators	fuse shields
70	T218241	G218759	W219278	H222486	Z213669	V216724	K200822
71	A223008	G200796	Y201340	H201855	J214690	N217753	M222513
72	E211075	V211595	D212109	R212627	J214690	N217753	Y211621
73	X213644	B214154	F214664	K215174	Q215708	M218787	X212655




End contacts TTF terminal fuse holders

Size	1 pole
70/71	C301233
72/73	E301235



French blades EF terminal fuse holders

Size	SP/SE/SF
70	F096099
71	V098711
72	W098712
73	C209187



Din blades 110 mm DI N 43653 terminal fuse holders

Size	Fuses holders
70/71/72/73	L091941



Warning: for all holders, please check maximum fuse and fuse holders operating limit. in Gear and Fuse gear section
Tightning torque see Gear and Fuse gear section.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.

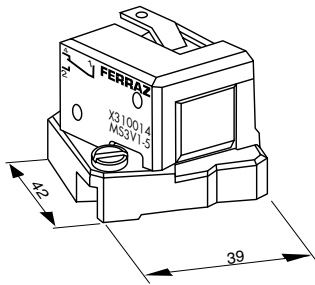

(fig. 1)

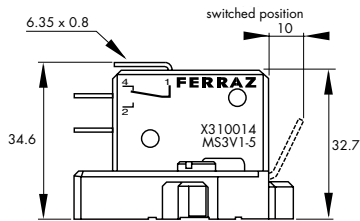


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

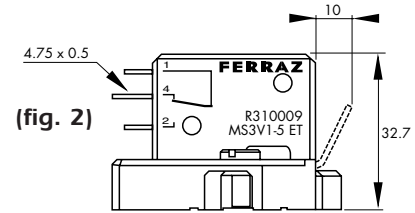


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

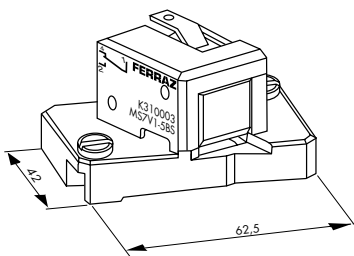

(fig. 5)

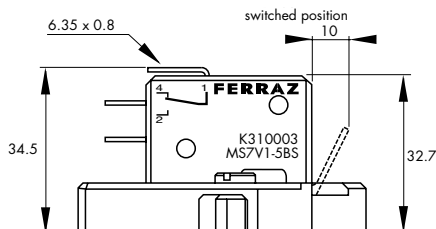


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

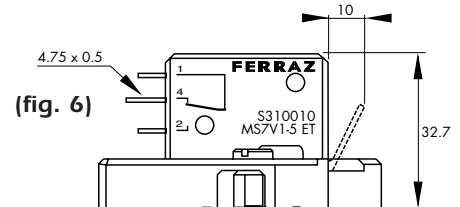

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	gRB	125	1,06	6,2	18	35	18	35		
	gRB	160	2,4	14	19	38	19	38		
	gRB	200	5	29,5	21	41	21	42		
	gRB	250	9,5	56	23	46	24	48		
	gRB	315	18,5	108	27	53	27	54		
	gRB	350	23	140	29	58	30	60		
	gRB	400	38	225	30	59	31	61		
	gRB	450	62	360	30	59	31	61		
	gRB	500	78	460	32	64	34	67		
	gRB	200	4,2	25	23	45	23	45		
	gRB	250	8,5	50	25	49	25	50		
	gRB	315	17	100	28	55	29	57		
	gRB	350	23	140	29	58	30	60		
	gRB	400	34	200	32	63	33	65		
	gRB	450	47	280	34	67	35	70		
	gRB	500	68	400	35	69	36	72		
	gRB	550	84	495	38	75	39	78		
	gRB	630	124	730	41	81	43	86		
	gRB	700	155	910	45	89	48	95		
	gRB	315	12	69	33	66	34	67		
	gRB	350	17	100	34	68	35	69		
	gRB	400	27	160	36	71	37	73		
	gRB	450	34	200	40	79	41	82		
	gRB	500	47	280	42	84	43	86		
	gRB	550	68	400	42	84	44	87		
	gRB	630	102	600	45	89	47	94		
	gRB	700	139	820	47	94	50	100		
	gRB	800	227	1330	48	96	52	104		
	gRB	900	280	1640	55	109	60	119		
	gRB	1000	385	2270	58	115	64	127		



Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves

} see following pages



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC French 70-73 Blades

Size	Designation	Reference Number	Weight (g)	Catalog Number
70	6,9 gRB 70 EF 050	P301405	370	PC70GB69V50EF
	6,9 gRB 70 EF 063	Q301406		PC70GB69V63EF
	6,9 gRB 70 EF 080	R301407		PC70GB69V80EF
	6,9 gRB 70 EF 100	S301408		PC70GB69V100EF
	6,9 gRB 70 EF 125	T301409		PC70GB69V125EF
	6,9 gRB 70 EF 160	V301410		PC70GB69V160EF
	6,9 gRB 70 EF 200			
	6,9 gRB 70 EF 250			
	6,9 gRB 70 EF 315			
71	6,9 gRB 71 EF 125	Y301321	540	PC71GB69V125EF
	6,9 gRB 71 EF 160	Z301322		PC71GB69V160EF
	6,9 gRB 71 EF 200	A301323		PC71GB69V200EF
	6,9 gRB 71 EF 250	B301324		PC71GB69V250EF
	6,9 gRB 71 EF 315			
	6,9 gRB 71 EF 350	C301325		PC71GB69V350EF
	6,9 gRB 71 EF 400	D301326		PC71GB69V400EF
	6,9 gRB 71 EF 450	E301327		PC71GB69V450EF
	6,9 gRB 71 EF 500	G301858		PC71GB69V500EF
72	6,9 gRB 72 EF 200	N301335	810	PC72GB69V200EF
	6,9 gRB 72 EF 250	P301336		PC72GB69V250EF
	6,9 gRB 72 EF 315	Q301337		PC72GB69V315EF
	6,9 gRB 72 EF 350			
	6,9 gRB 72 EF 400	R301338		PC72GB69V400EF
	6,9 gRB 72 EF 450			
	6,9 gRB 72 EF 500	S301339		PC72GB69V500EF
	6,9 gRB 72 EF 550	T301340		PC72GB69V550EF
	6,9 gRB 72 EF 630	V301341		PC72GB69V630EF
73	6,9 gRB 73 EF 315	C301348	1150	PC73GB69V315EF
	6,9 gRB 73 EF 350			
	6,9 gRB 73 EF 400	D301349		PC73GB69V400EF
	6,9 gRB 73 EF 450	E301350		PC73GB69V450EF
	6,9 gRB 73 EF 500			
	6,9 gRB 73 EF 550	F301351		PC73GB69V550EF
	6,9 gRB 73 EF 630	G301352		PC73GB69V630EF
	6,9 gRB 73 EF 700	H301353		PC73GB69V700EF
	6,9 gRB 73 EF 800			
6,9 gRB 73 EF 900				
6,9 gRB 73 EF 1000				

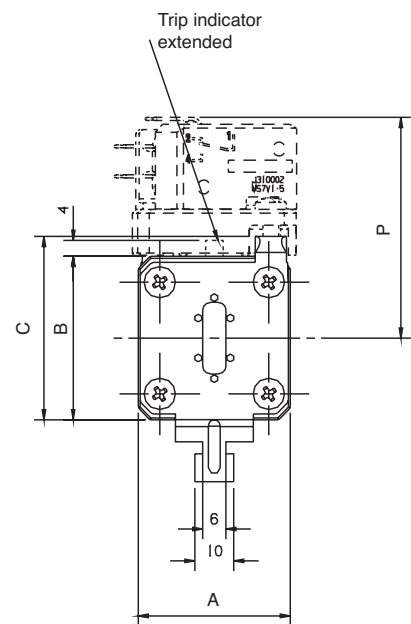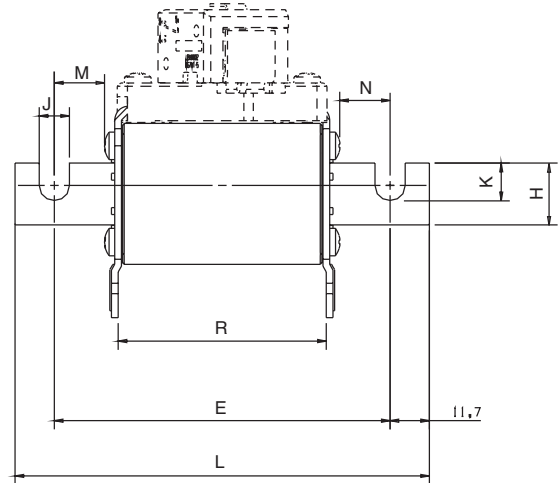

Packaging: 3 pieces sizes 70 and 71 / 1 piece size 72 and 73

Microswitches: MS 7V 1-5		Réf.J310002	Standard NO-NC
MS 7V 1-5 UR		Réf.Z310039	Standard NO-NC
MS 7V 1-5 BS		Réf.K310003	Low level NO-NC
MS 7V 1-9 BS		Réf.P310007	Double pole NO-NC-low level
MS 7V 1-5 ET		Réf.S310010	Low level NO-NC-IP 50

Microswitches supplied separately

Size	A	B	C	E ^{+1,3}	H	J	K	L ^{+1,5}	M	N	P	R
70	39,8	41,8	46,5	100	18	9	11	123,4	28,2	28,2	77	68
	1.57"	1.65"	1.83"	3.94"	0.71"	0.35"	0.43"	4.86"	1.11"	1.11"	3.03"	2.68"
71	51	51	56,5	110	25	10,5	16	133,4	32,7	32,7	91	68
	2.00"	2.00"	2.22"	4.33"	0.98"	0.41"	0.63"	5.25"	1.29"	1.29"	3.58"	2.68"
72	60	60	65,5	114,4	32	13	21,2	149,4	40,7	40,7	100	68
	2.36"	2.36"	2.58"	4.50"	1.26"	0.51"	0.83"	5.88"	1.60"	1.60"	3.93"	2.68"
73	74,4	74,4	78,5	114,4	40	13	19,5	149,4	40,7	40,7	114,4	68
	2.93"	2.93"	3.09"	4.50"	1.58"	0.51"	0.77"	5.88"	1.60"	1.60"	4.50"	2.68"

Reinforced and longer knives available under designation ESF
Fuse holder solution, see Fuse gear section.




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

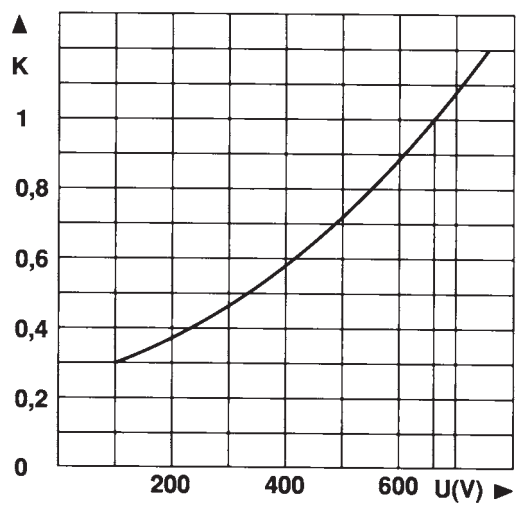

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

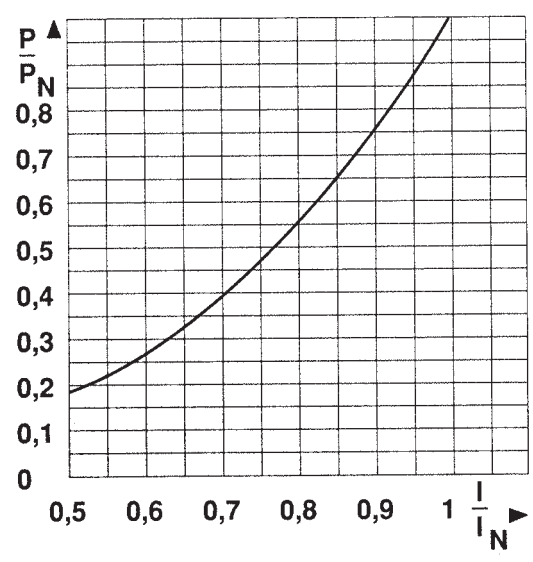

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

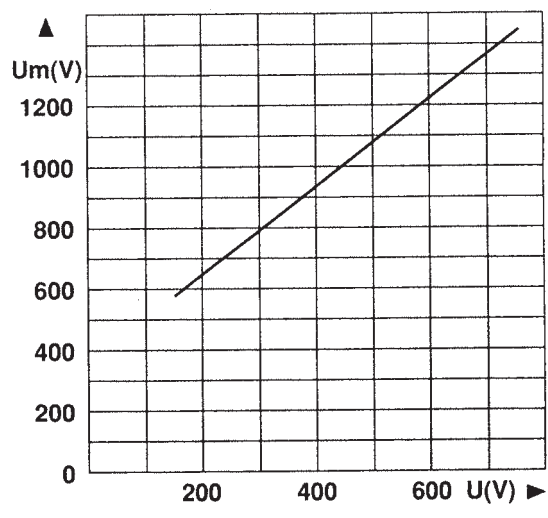


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

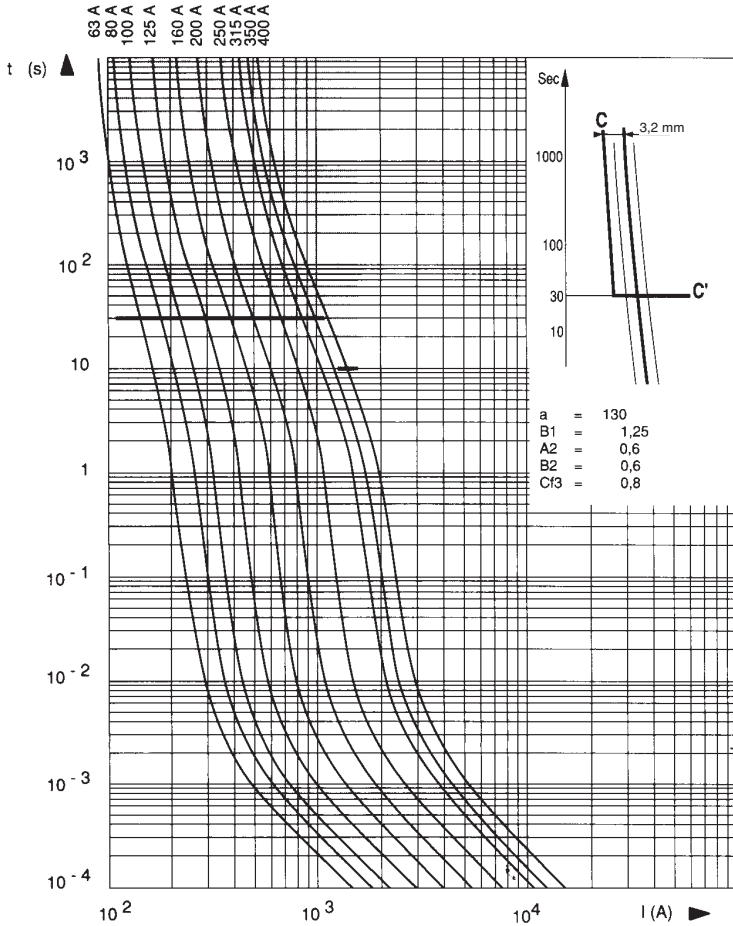

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

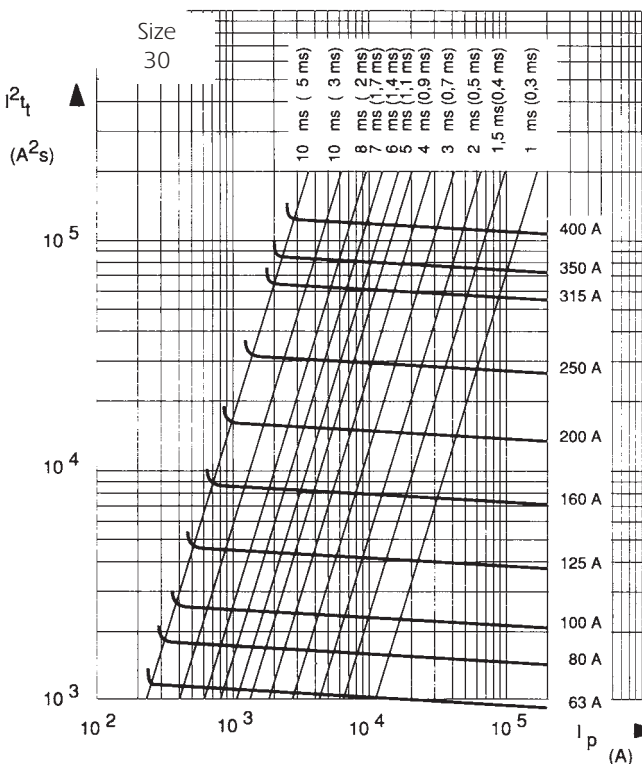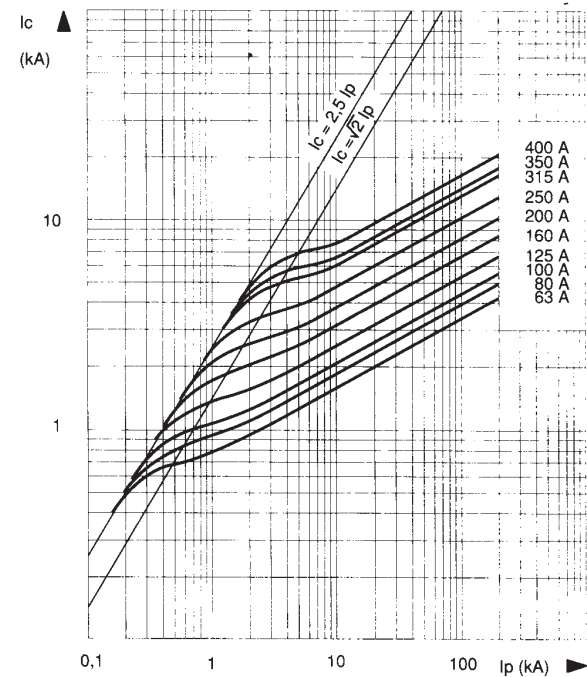

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times




Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

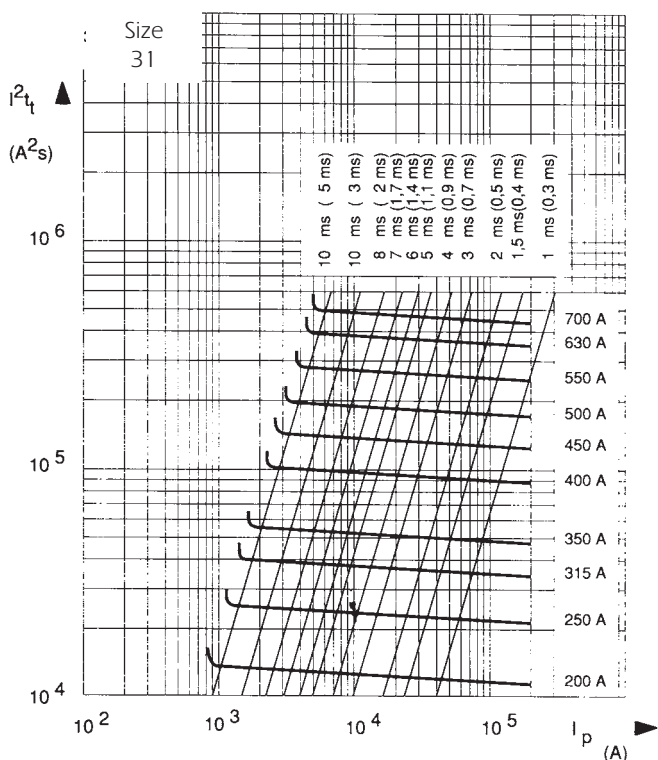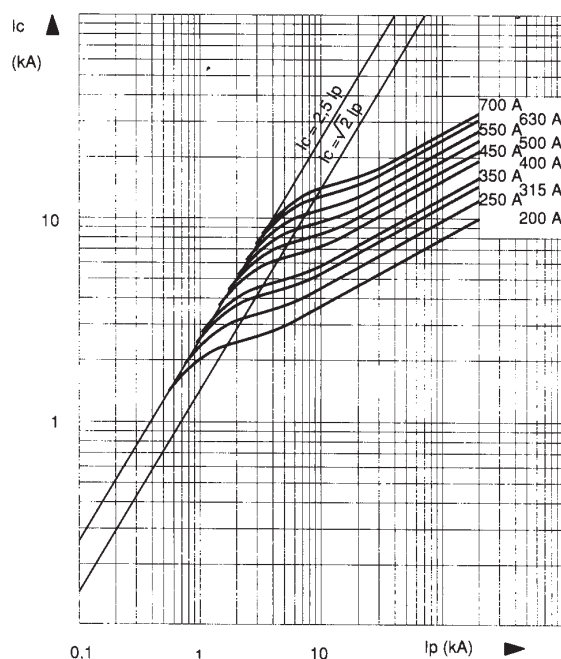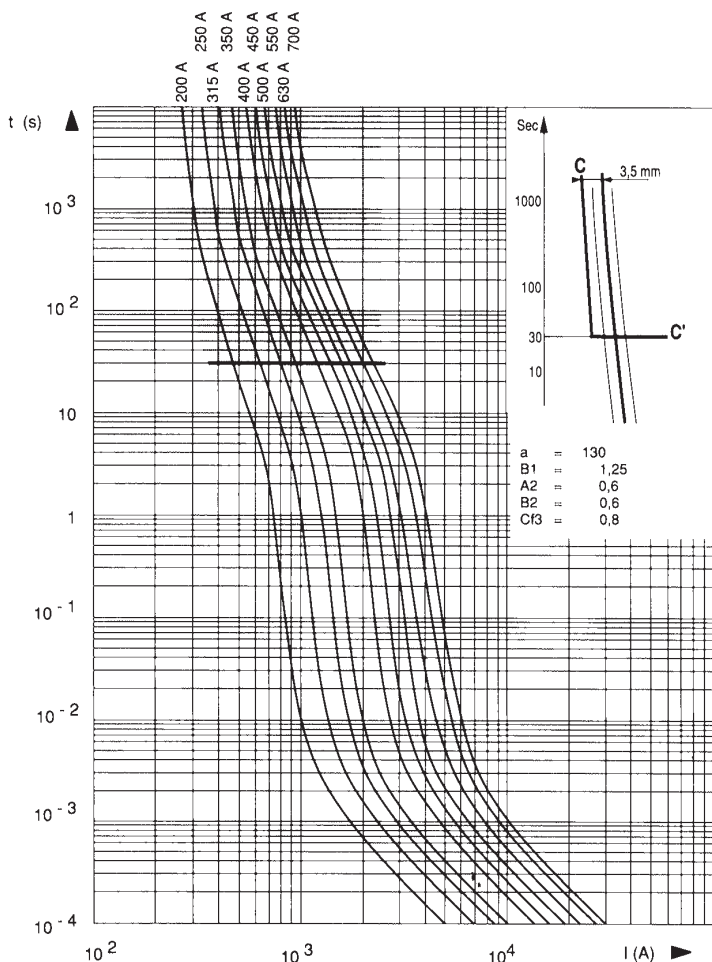

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

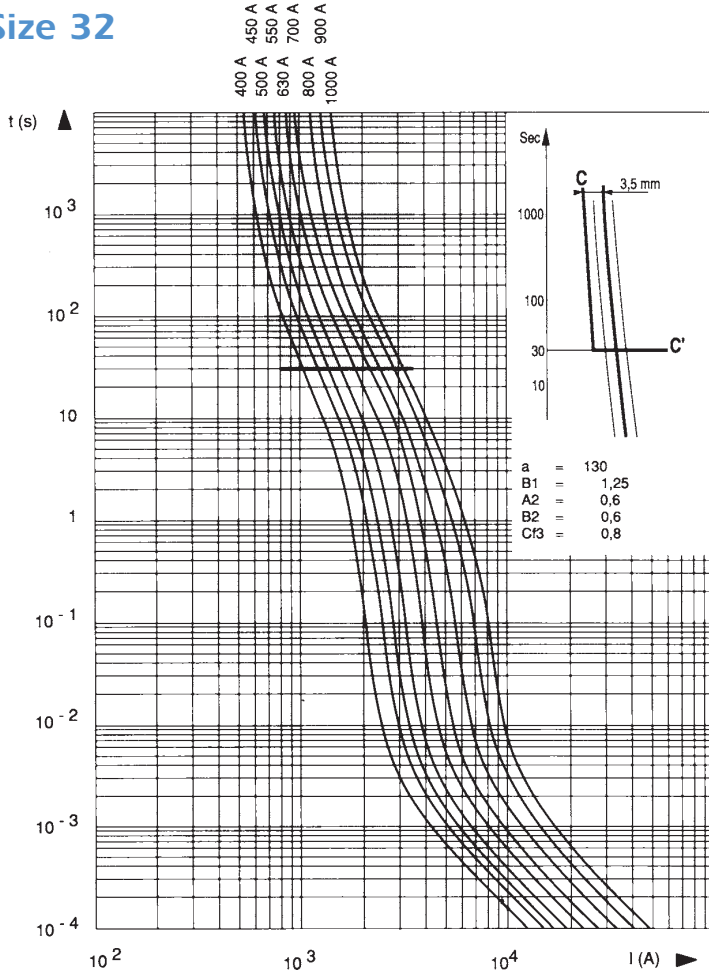

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

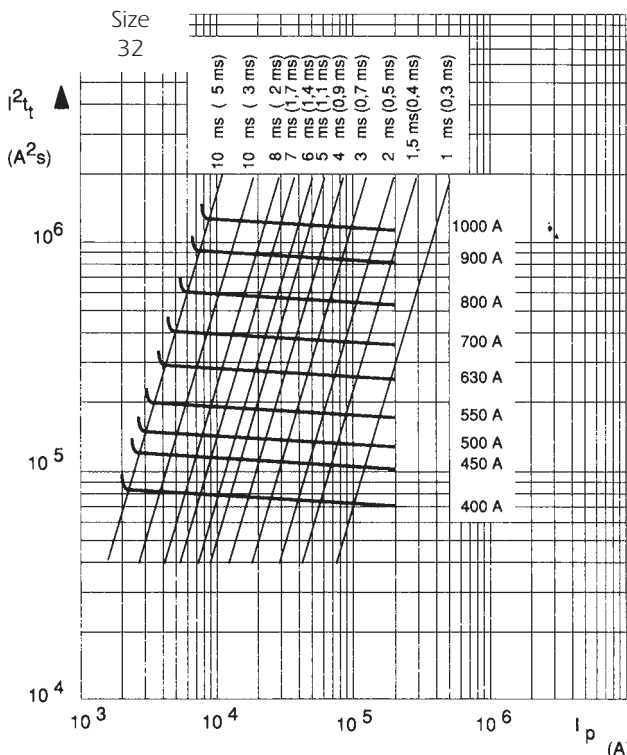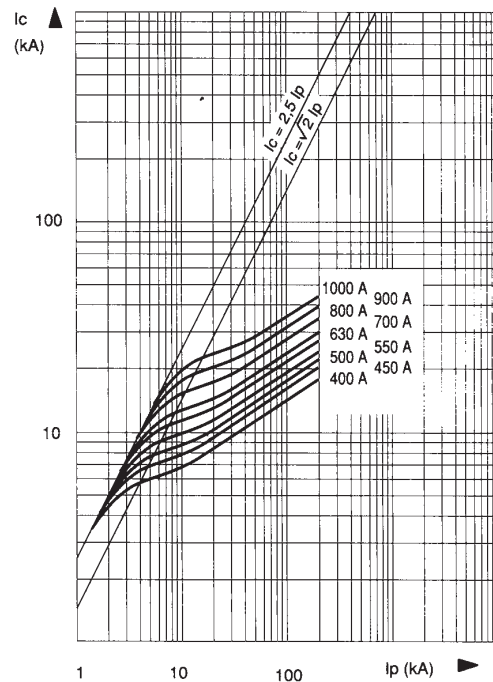

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

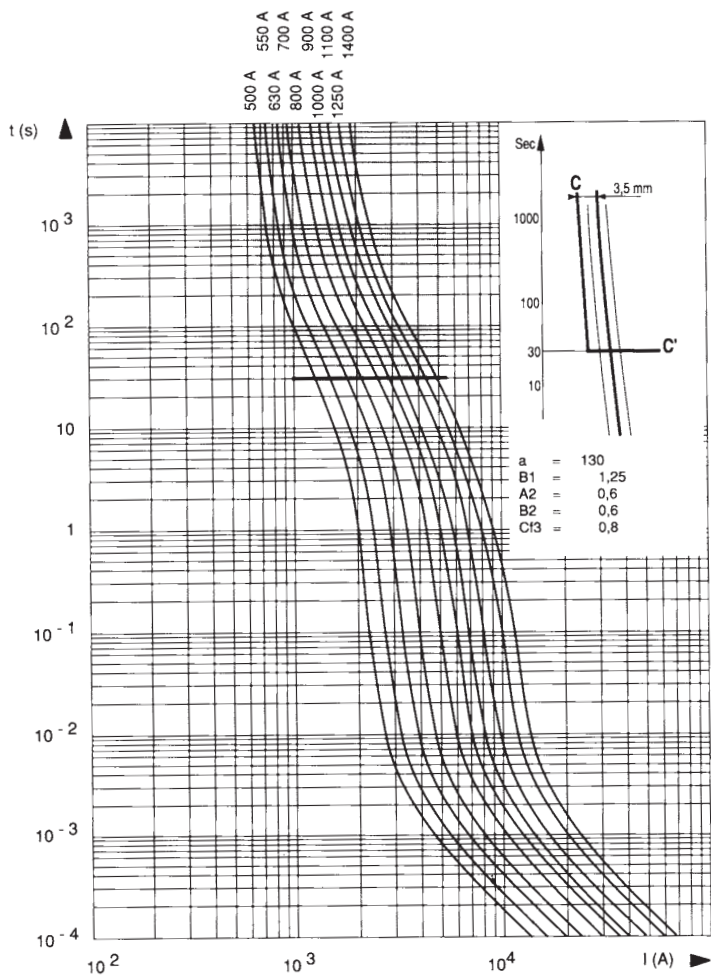

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

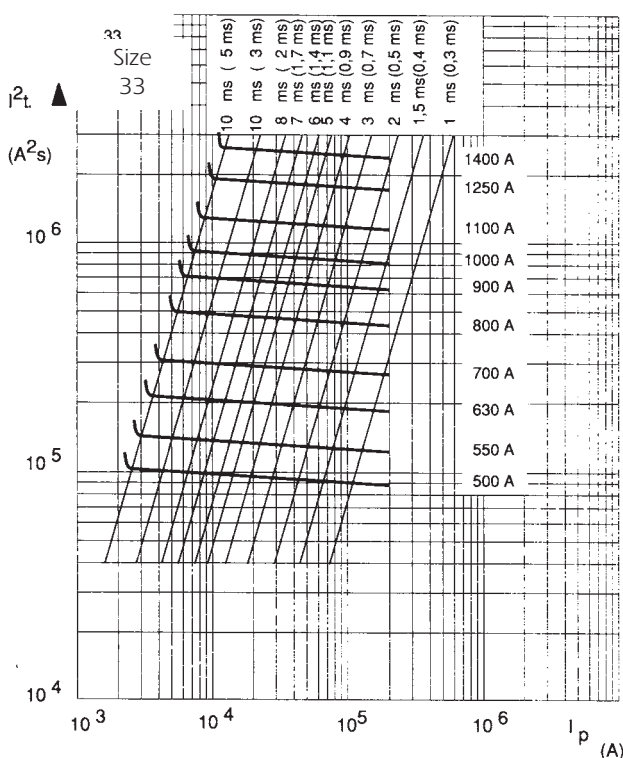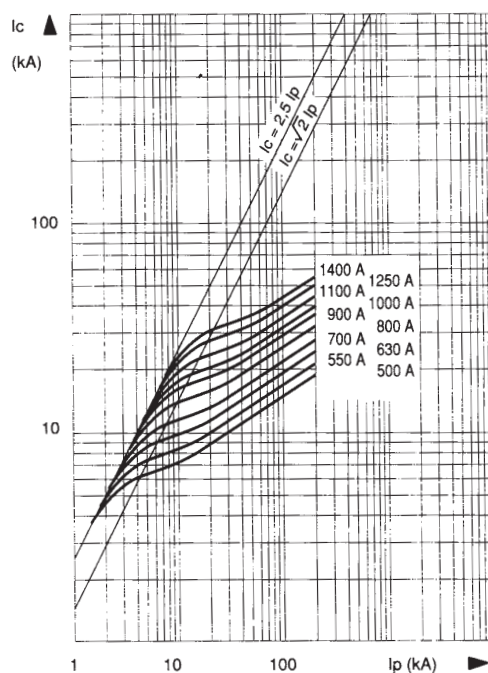

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

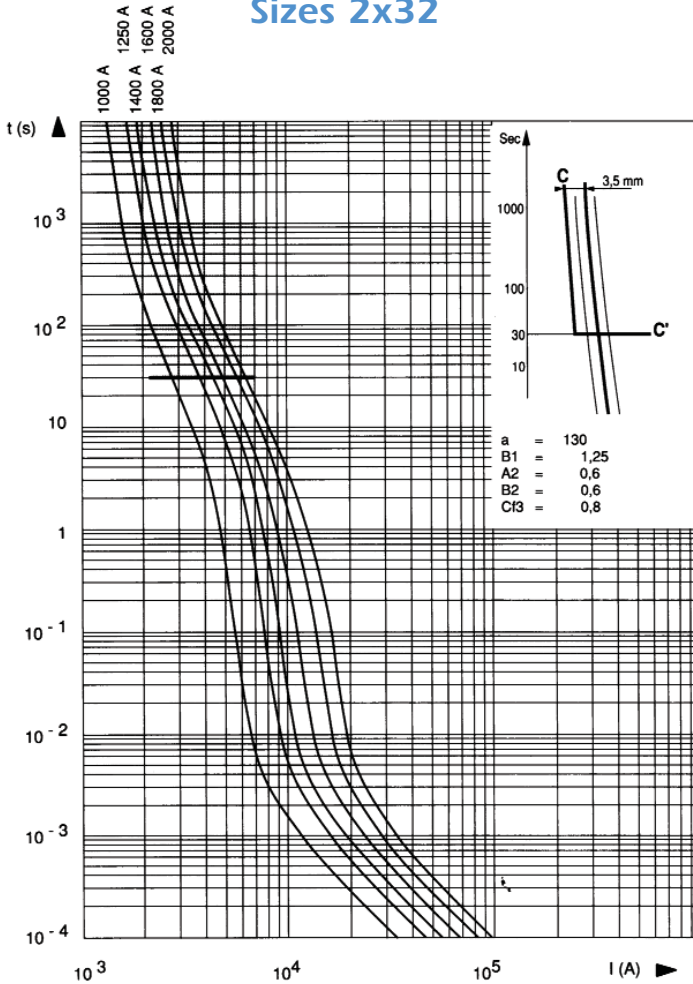

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

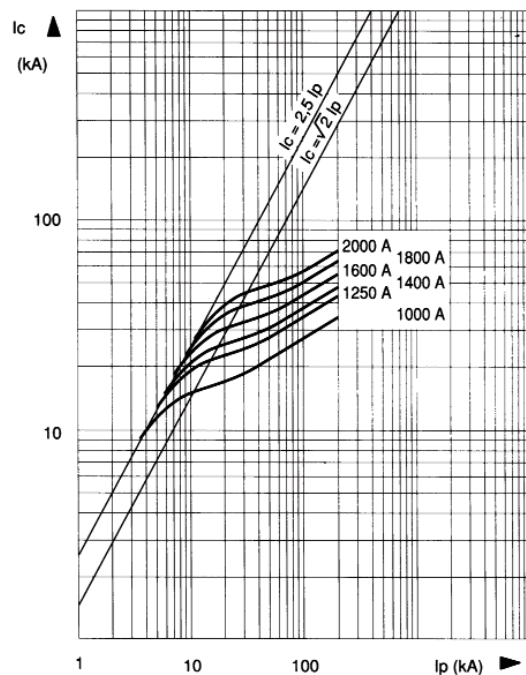

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

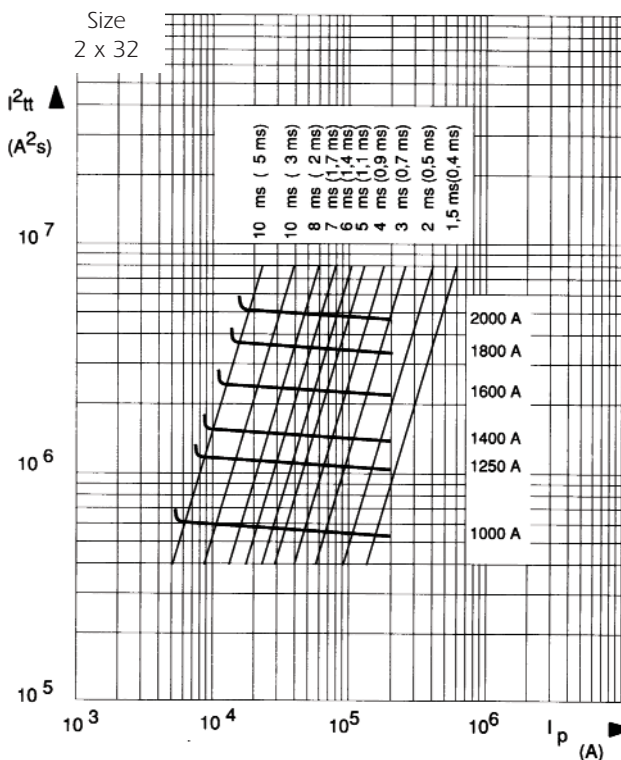

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

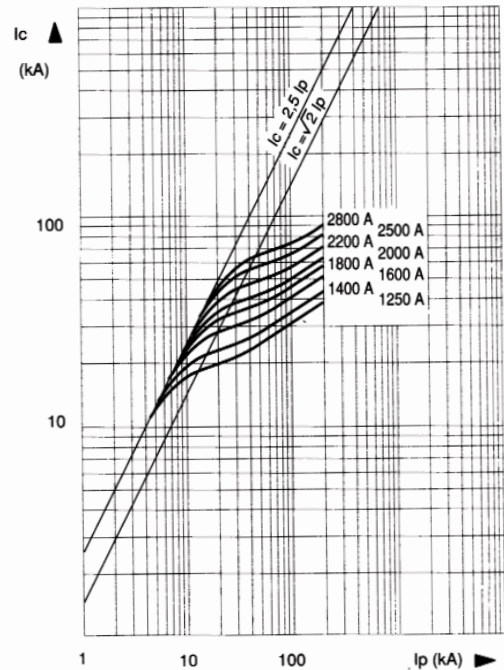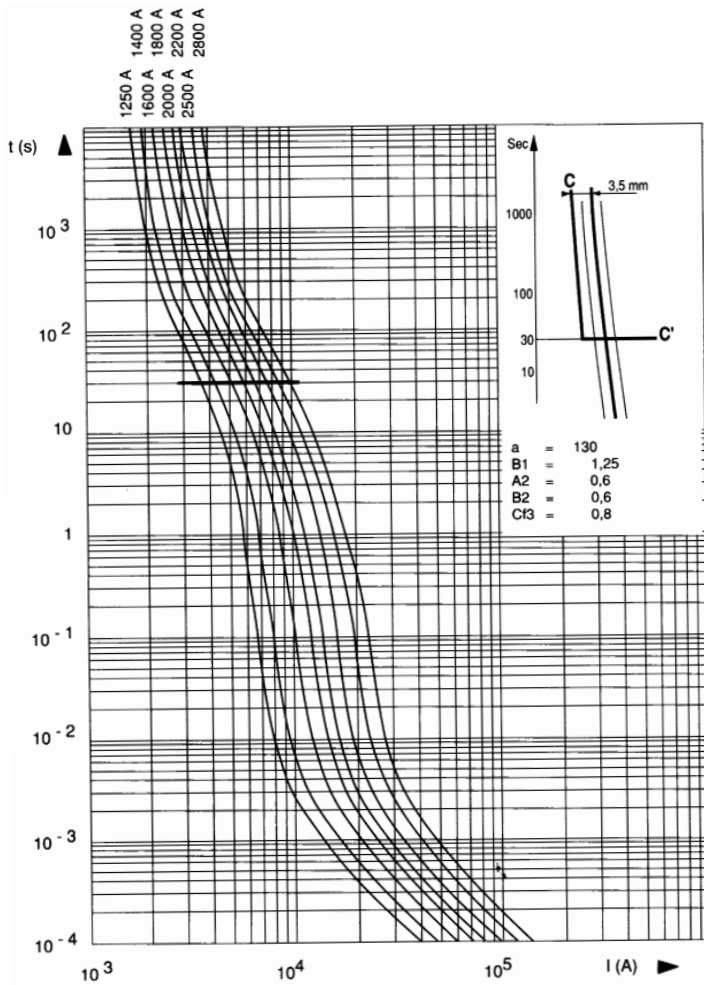

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

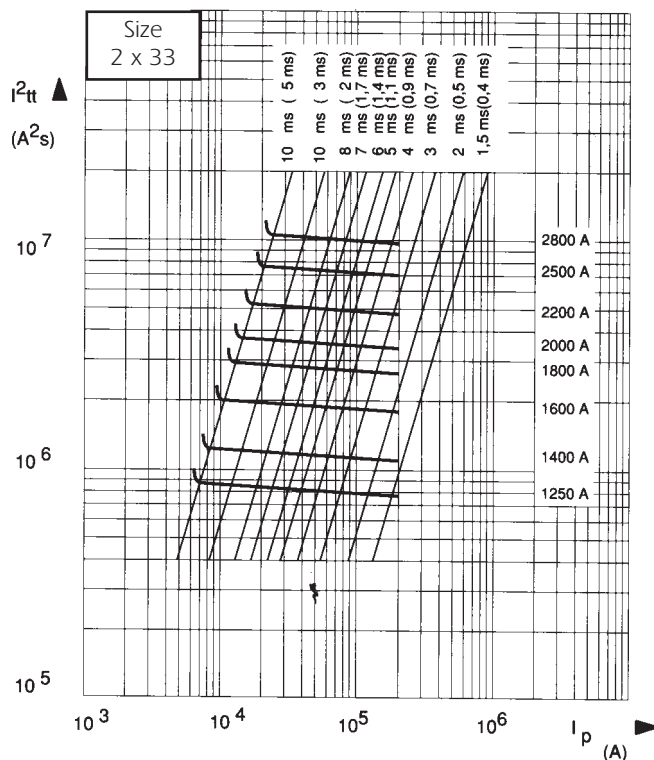

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

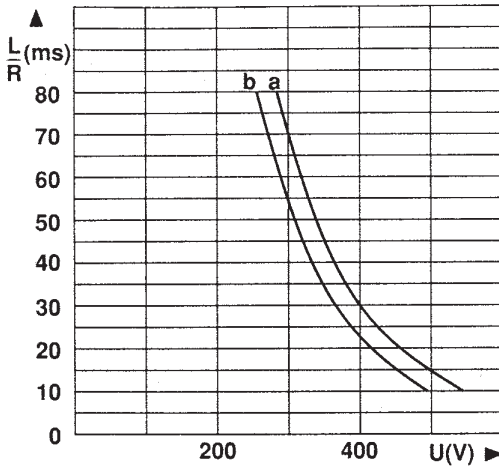

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

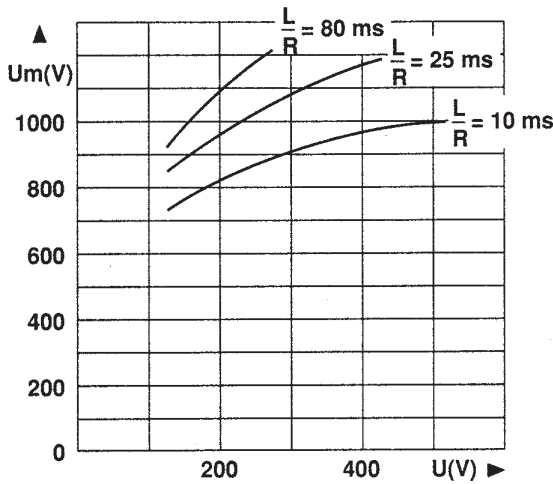

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A	12 kV	20 kV	
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A	12 kV	20 kV	
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A	12 kV	20 kV	
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x &7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

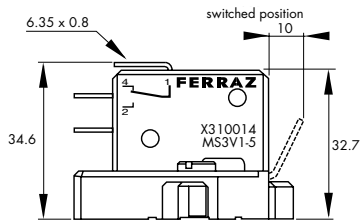


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

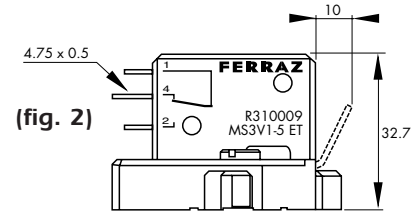


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

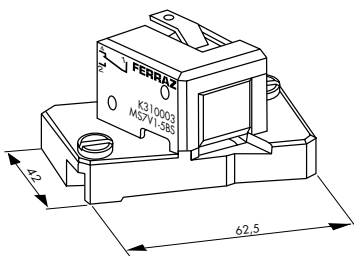

(fig. 5)

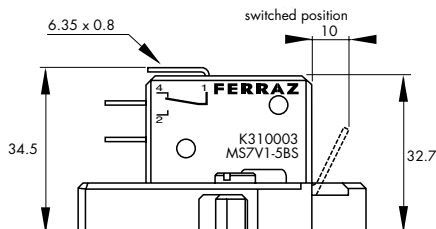


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

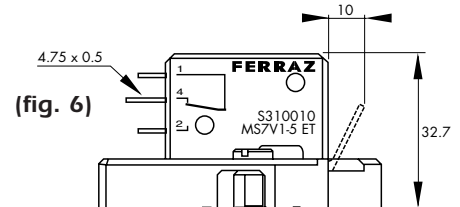

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	Size 2 HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	gRB	125	1,06	6,2	18	35	18	35		
	gRB	160	2,4	14	19	38	19	38		
	gRB	200	5	29,5	21	41	21	42		
	gRB	250	9,5	56	23	46	24	48		
	gRB	315	18,5	108	27	53	27	54		
	gRB	350	23	140	29	58	30	60		
	gRB	400	38	225	30	59	31	61		
	gRB	450	62	360	30	59	31	61		
	gRB	500	78	460	32	64	34	67		
	gRB	200	4,2	25	23	45	23	45		
	gRB	250	8,5	50	25	49	25	50		
	gRB	315	17	100	28	55	29	57		
	gRB	350	23	140	29	58	30	60		
	gRB	400	34	200	32	63	33	65		
	gRB	450	47	280	34	67	35	70		
	gRB	500	68	400	35	69	36	72		
	gRB	550	84	495	38	75	39	78		
	gRB	630	124	730	41	81	43	86		
	gRB	700	155	910	45	89	48	95		
	gRB	315	12	69	33	66	34	67		
	gRB	350	17	100	34	68	35	69		
	gRB	400	27	160	36	71	37	73		
	gRB	450	34	200	40	79	41	82		
	gRB	500	47	280	42	84	43	86		
	gRB	550	68	400	42	84	44	87		
	gRB	630	102	600	45	89	47	94		
	gRB	700	139	820	47	94	50	100		
	gRB	800	227	1330	48	96	52	104		
	gRB	900	280	1640	55	109	60	119		
	gRB	1000	385	2270	58	115	64	127		


Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves

} see following pages



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC German 70-73 End contacts

Size	Designation	Reference Number	Weight (g)	Catalog Number	
70*	6,9 gRB 70 D11A 050		370		
	6,9 gRB 70 D11A 063				
	6,9 gRB 70 D11A 080				
	6,9 gRB 70 D11A 100	Q302027		PC70GB69V100D1A	
	6,9 gRB 70 D11A 125				
	6,9 gRB 70 D11A 160	R301591		PC70GB69V160D1A	
	6,9 gRB 70 D11A 200	S301592		PC70GB69V200D1A	
	6,9 gRB 70 D11A 250	Z301943		PC70GB69V250D1A	
	6,9 gRB 70 D11A 315	J301584		PC70GB69V315D1A	
	6,9 gRB 70 D11A 350	W302124		PC70GB69V350D1A	
	6,9 gRB 71 D11A 125	B302658		PC71GB69V125D1A	
	6,9 gRB 71 D11A 160	C302659		PC71GB69V160D1A	
	6,9 gRB 71 D11A 200	C302682		PC71GB69V200D1A	
6,9 gRB 71 D11A 250	R302143	PC71GB69V250D1A			
71*	6,9 gRB 71 D11A 315		540		
	6,9 gRB 71 D11A 350	T302214		PC71GB69V350D1A	
	6,9 gRB 71 D11A 400				
	6,9 gRB 71 D11A 450	R301637		PC71GB69V450D1A	
	6,9 gRB 71 D11A 500	A301737		PC71GB69V500D1A	
	6,9 gRB 72 D11A 200			800	
6,9 gRB 72 D11A 250	T302697				
6,9 gRB 72 D11A 315	V302698				
6,9 gRB 72 D11A 350	E302500	PC72GB69V350D1A			
6,9 gRB 72 D11A 400	V302215	PC72GB69V400D1A			
6,9 gRB 72 D11A 450	Q302671	PC72GB69V450D1A			
6,9 gRB 72 D11A 500					
6,9 gRB 72 D11A 550	L301724	PC72GB69V550D1A			
6,9 gRB 72 D11A 630					
6,9 gRB 72 D11A 700					
73**	6,9 gRB 73 D11A 315		1150		
	6,9 gRB 73 D11A 350				
	6,9 gRB 73 D11A 400				
	6,9 gRB 73 D11A 450				
	6,9 gRB 73 D11A 500	W302216		PC73GB69V500D1A	
	6,9 gRB 73 D11A 550	R302672		PC73GB69V550D1A	
	6,9 gRB 73 D11A 630				
	6,9 gRB 73 D11A 700	F301765		PC73GB69V700D1A	
	6,9 gRB 73 D11A 800				
6,9 gRB 73 D11A 900					
6,9 gRB 73 D11A 1000	S302673	PC73GB69V10CD1A			

Packaging: * 3 pieces
** 1 piece

Microswitches:	MS 7V 1-5		Réf.J310002	Standard NO-NC
	MS 7V 1-5 UR		Réf.Z310039	Standard NO-NC
	MS 7V 1-5 BS		Réf.K310003	Low level NO-NC
	MS 7V 1-9 BS		Réf.P310007	Double pole NO-NC-low level
	MS 7V 1-5 ET		Réf.S310010	Low level NO-NC-IP 50

Microswitches supplied separately

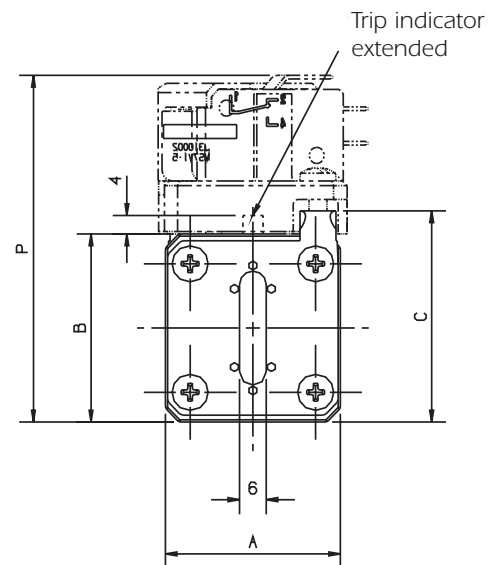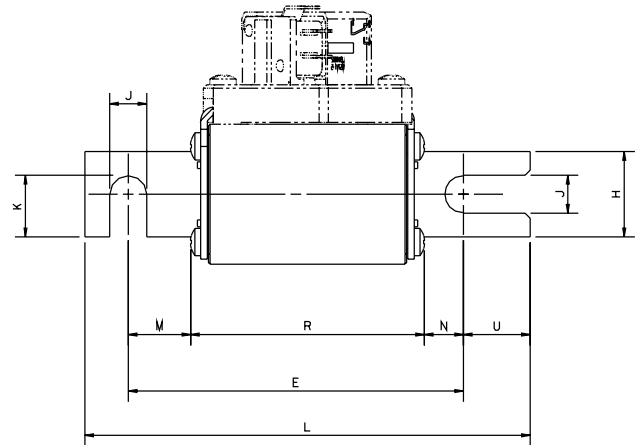

Size	A	B	C	E ^{1,3}	H	J	K	L	M	N	P	R
70	39,8	41,8	46,5	100,4	25	10,5	17,7	133,4	18,5	11,5	81,4	70,4
	1.57"	1.65"	1.83"	3.95"	0.98"	0.41"	0.70"	5.25"	0.73"	0.43"	3.20"	2.77"
71	51	51	56,5	100,4	25	10,5	17,7	133,4	18,5	11,5	91	70,4
	2.00"	2.00"	2.22"	3.95"	0.98"	0.41"	0.70"	5.25"	0.73"	0.45"	3.68"	2.77"
72	60	60	65,5	100,4	32	11,1	21,2	133,4	18,5	11,5	93,6	70,4
	2.36"	2.36"	2.58"	3.95"	1.26"	0.44"	0.83"	5.25"	0.73"	0.45"	3.69"	2.77"
73	74,4	74,4	78,5	100,4	40	10,5	25,2	133,4	18	11	114,4	70,4
	2.93"	2.93"	3.09"	3.95"	1.58"	0.41"	1.00"	5.25"	0.71"	0.43"	4.50"	2.77"


Fuse holder solution, see Fuse gear section.




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Times/Current Characteristics


Size 70

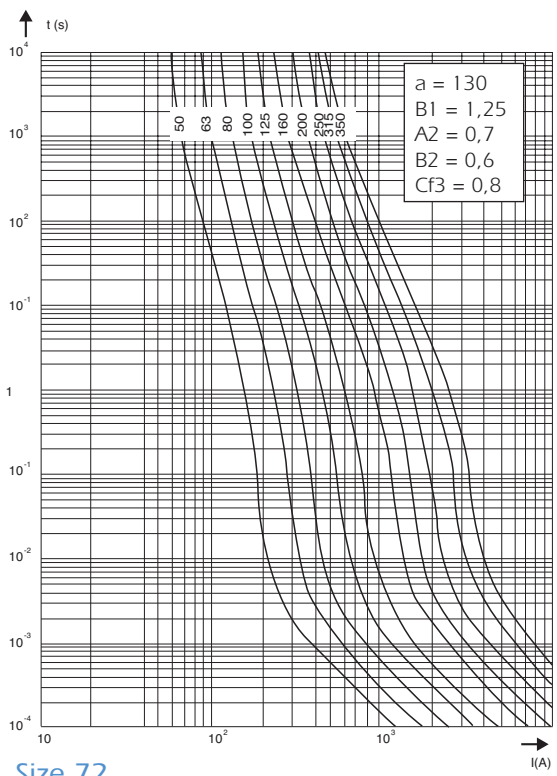


Size 71

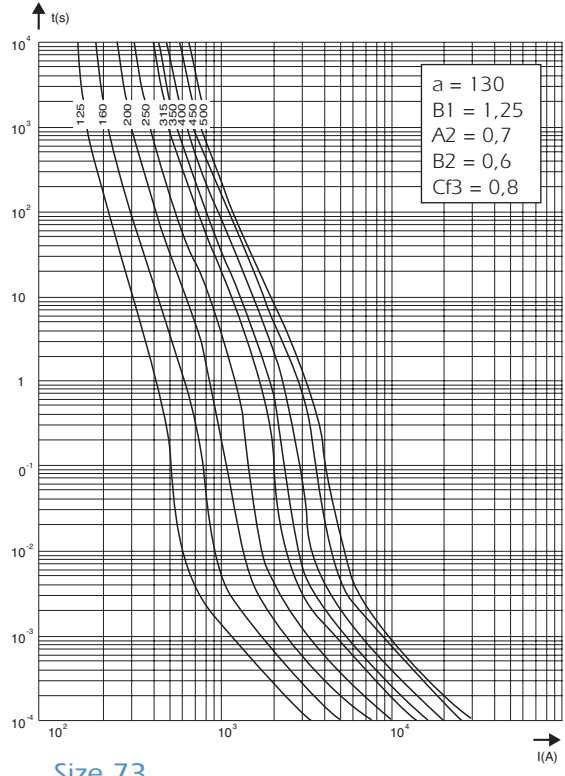

Size 72

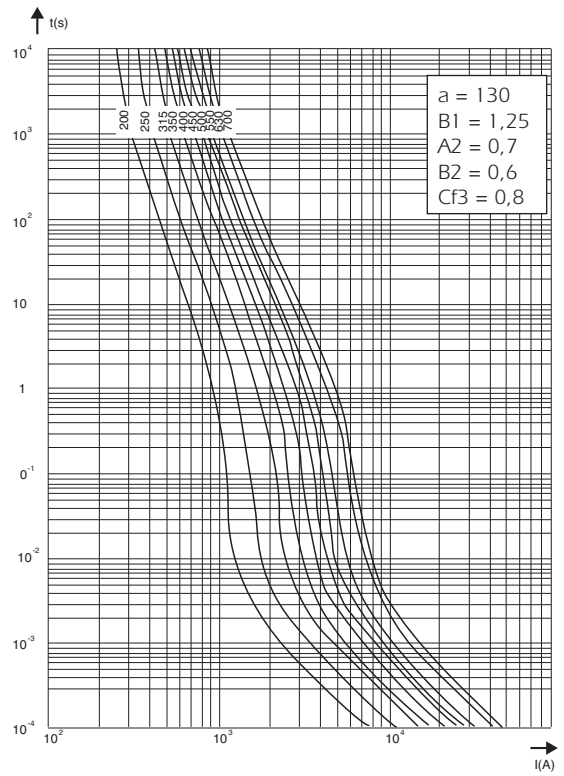

Size 73

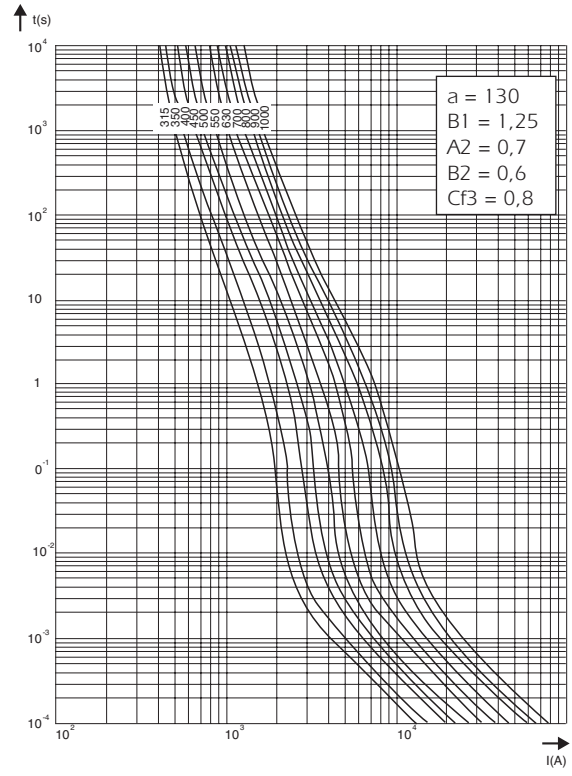





Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Cut off characteristics Peak let thru current


Size 70

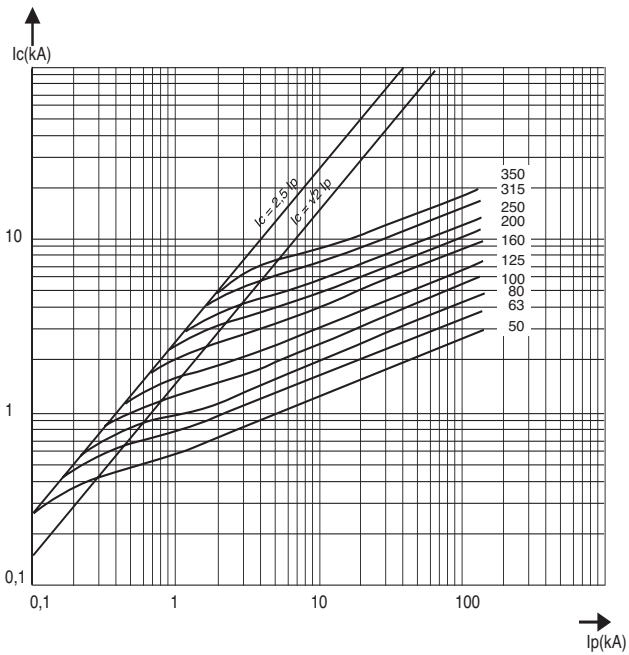


Size 71

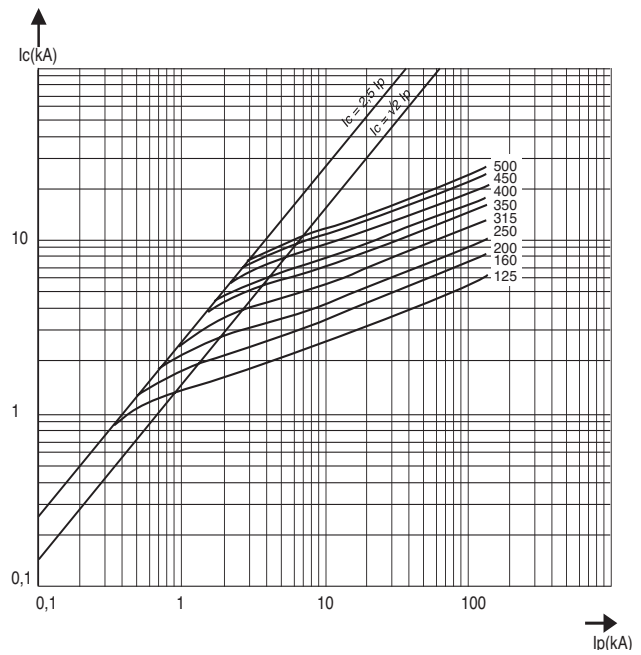

Size 72

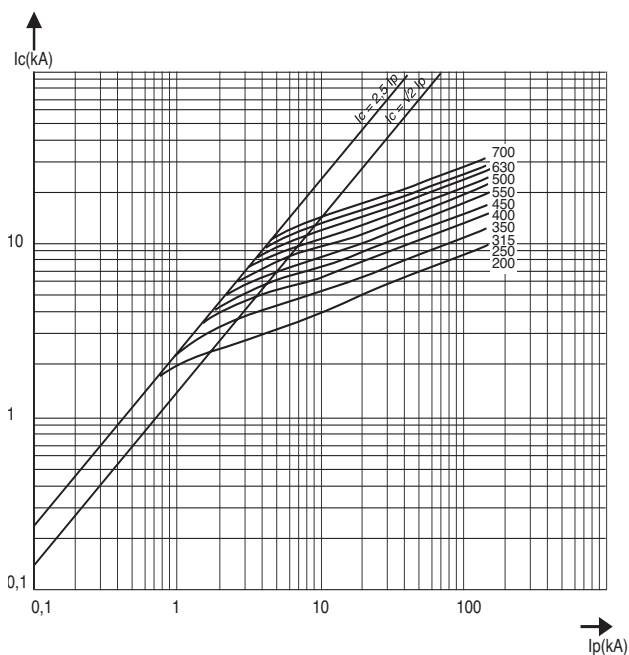

Size 73

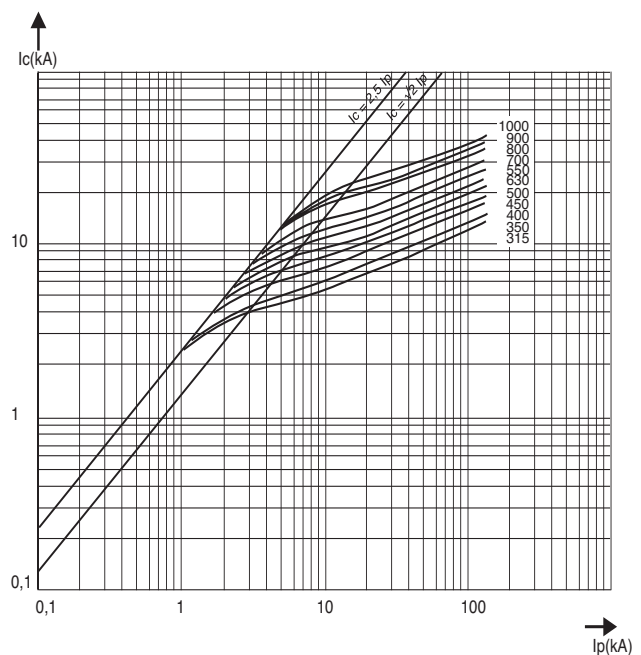




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


Total I²t and total operating time @ 690 V

Size 70

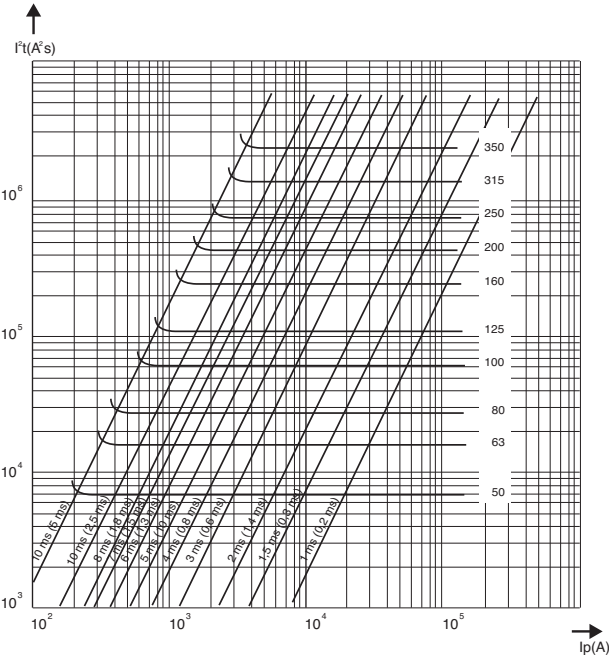


Value between parentheses pertain to prearcing I²t

Size 71

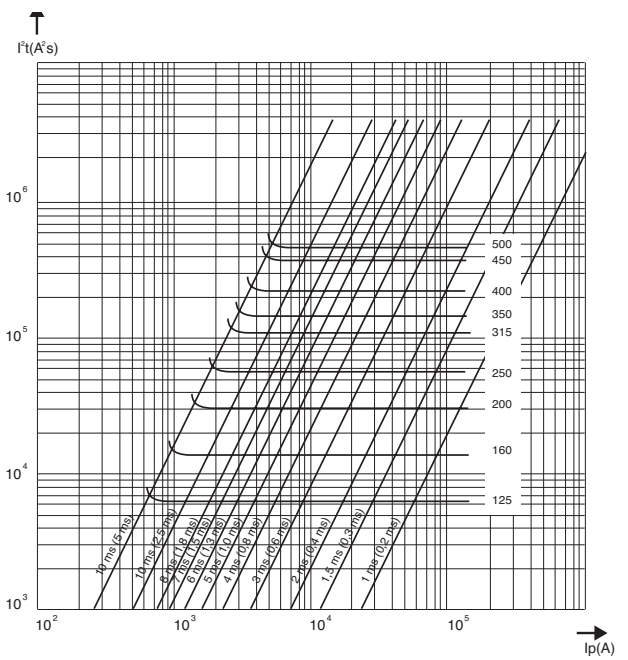


Size 72

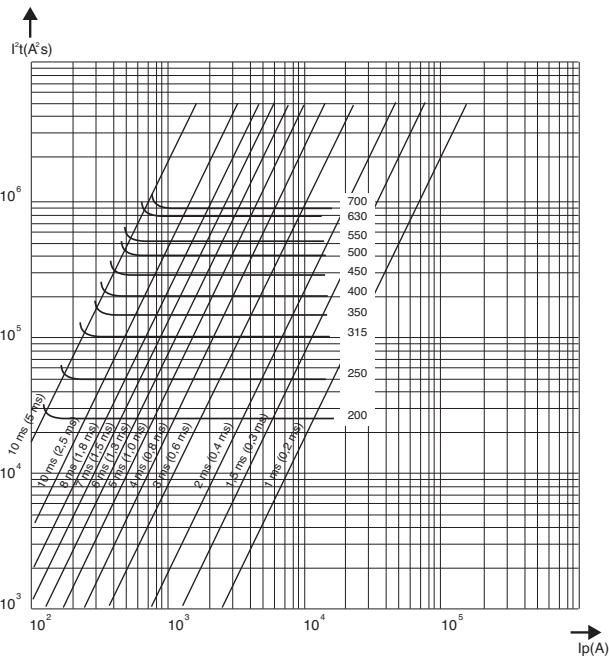

Value between parentheses pertain to prearcing I²t


Size 73

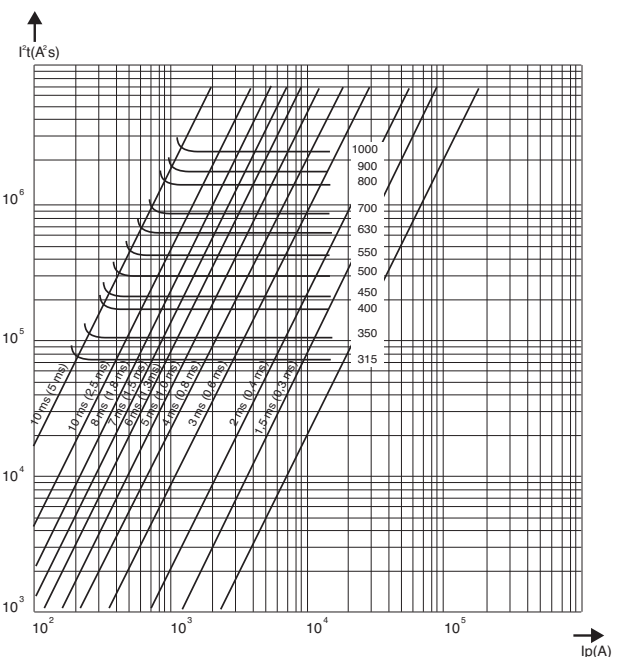




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


$k=f(U)$
Multiplier coefficient
to calculate total I^2t
and total operating time

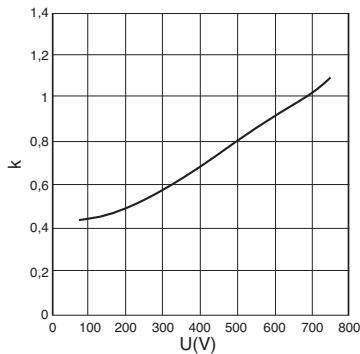

P/PN
Multiplier coefficient
to calculate the power
losses at various currents

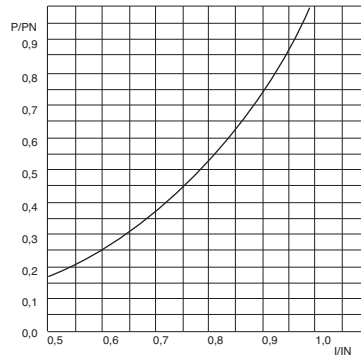

Peak arc voltage

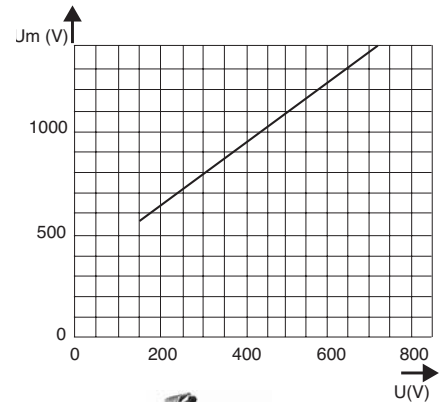

PA terminals fuse holder

Size	1 pole	2 poles	3 poles	4 poles	wall	separators	fuse shields
70	T218241	G218759	W219278	H222486	Z213669	V216724	K200822
71	A223008	G200796	Y201340	H201855	J214690	N217753	M222513
72	E211075	V211595	D212109	R212627	J214690	N217753	Y211621
73	X213644	B214154	F214664	K215174	Q215708	M218787	X212655




End contacts TTF terminal fuse holders

Size	1 pole
70/71	C301233
72/73	E301235




French blades EF terminal fuse holders

Size	SP/SE/SF
70	F096099
71	V098711
72	W098712
73	C209187



Din blades 110 mm DI N 43653 terminal fuse holders

Size	Fuses holders
70/71/72/73	L091941



Warning: for all holders, please check maximum fuse and fuse holders operating limit. in Gear and Fuse gear section
Tightning torque see Gear and Fuse gear section.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

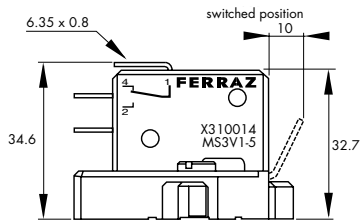


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

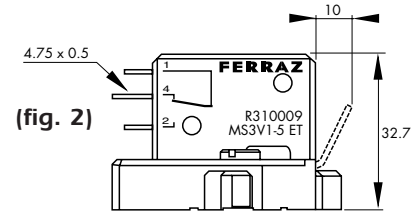


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

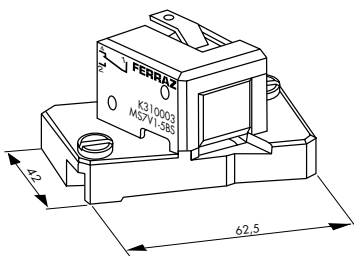

(fig. 5)

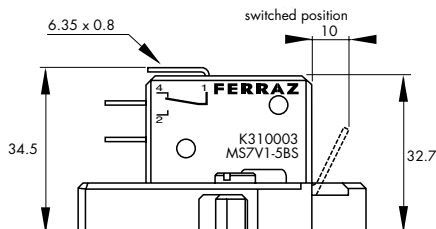


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

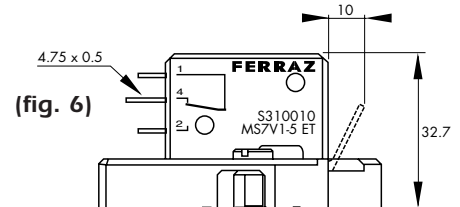

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	gRB	125	1,06	6,2	18	35	18	35		
	gRB	160	2,4	14	19	38	19	38		
	gRB	200	5	29,5	21	41	21	42		
	gRB	250	9,5	56	23	46	24	48		
	gRB	315	18,5	108	27	53	27	54		
	gRB	350	23	140	29	58	30	60		
	gRB	400	38	225	30	59	31	61		
	gRB	450	62	360	30	59	31	61		
	gRB	500	78	460	32	64	34	67		
	gRB	200	4,2	25	23	45	23	45		
	gRB	250	8,5	50	25	49	25	50		
	gRB	315	17	100	28	55	29	57		
	gRB	350	23	140	29	58	30	60		
	gRB	400	34	200	32	63	33	65		
	gRB	450	47	280	34	67	35	70		
	gRB	500	68	400	35	69	36	72		
	gRB	550	84	495	38	75	39	78		
	gRB	630	124	730	41	81	43	86		
	gRB	700	155	910	45	89	48	95		
	gRB	315	12	69	33	66	34	67		
	gRB	350	17	100	34	68	35	69		
	gRB	400	27	160	36	71	37	73		
	gRB	450	34	200	40	79	41	82		
	gRB	500	47	280	42	84	43	86		
	gRB	550	68	400	42	84	44	87		
	gRB	630	102	600	45	89	47	94		
	gRB	700	139	820	47	94	50	100		
	gRB	800	227	1330	48	96	52	104		
	gRB	900	280	1640	55	109	60	119		
	gRB	1000	385	2270	58	115	64	127		

Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves

} see following pages



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC IEC Terminals 70-73 Blades

Size	Designation	Reference Number	Weight (g)	Catalog Number
70*	6,9 gRB 70 PA 050	Q301245	340	PC70GB69V50PA
	6,9 gRB 70 PA 063	R301246		PC70GB69V63PA
	6,9 gRB 70 PA 080	S301247		PC70GB69V80PA
	6,9 gRB 70 PA 100	T301248		PC70GB69V100PA
	6,9 gRB 70 PA 125	T301179		PC70GB69V125PA
	6,9 gRB 70 PA 160	F301190		PC70GB69V160PA
	6,9 gRB 70 PA 200	S301178		PC70GB69V200PA
	6,9 gRB 70 PA 250	V301249		PC70GB69V250PA
	6,9 gRB 70 PA 315	W301250		PC70GB69V315PA
	6,9 gRB 70 PA 350	X301251		PC70GB69V350PA
71*	6,9 gRB 71 PA 125	Y301252	550	PC71GB69V125PA
	6,9 gRB 71 PA 160	Z301253		PC71GB69V160PA
	6,9 gRB 71 PA 200	A301254		PC71GB69V200PA
	6,9 gRB 71 PA 250	B301255		PC71GB69V250PA
	6,9 gRB 71 PA 315	R301177		PC71GB69V315PA
	6,9 gRB 71 PA 350	E301258		PC71GB69V350PA
	6,9 gRB 71 PA 400	V301226		PC71GB69V400PA
	6,9 gRB 71 PA 450	C301256		PC71GB69V450PA
72*	6,9 gRB 72 PA 200	F301259	820	PC72GB69V200PA
	6,9 gRB 72 PA 250	G301260		PC72GB69V250PA
	6,9 gRB 72 PA 315	H301261		PC72GB69V315PA
	6,9 gRB 72 PA 350	J301262		PC72GB69V350PA
	6,9 gRB 72 PA 400	K301263		PC72GB69V400PA
	6,9 gRB 72 PA 450	L301264		PC72GB69V450PA
	6,9 gRB 72 PA 500	M301265		PC72GB69V500PA
	6,9 gRB 72 PA 550	N301266		PC72GB69V550PA
	6,9 gRB 72 PA 630	P301267		PC72GB69V630PA
	6,9 gRB 72 PA 700	Q301268		PC72GB69V700PA
73**	6,9 gRB 73 PA 315	R301269	1120	PC73GB69V315PA
	6,9 gRB 73 PA 350	S301270		PC73GB69V350PA
	6,9 gRB 73 PA 400	T301271		PC73GB69V400PA
	6,9 gRB 73 PA 450	V301272		PC73GB69V450PA
	6,9 gRB 73 PA 500	W301273		PC73GB69V500PA
	6,9 gRB 73 PA 550	N301404		PC73GB69V550PA
	6,9 gRB 73 PA 630	X301274		PC73GB69V630PA
	6,9 gRB 73 PA 700	Y301275		PC73GB69V700PA
	6,9 gRB 73 PA 800	Z301276		PC73GB69V800PA
	6,9 gRB 73 PA 900	A301277		PC73GB69V900PA
6,9 gRB 73 PA 1000	B301278	PC73GB69V1000PA		


Packaging: *3 pieces - ** 1 piece

Size Fuses	Microswitches		
70	MS PA 2-5T70	Réf.T210398	OF Standard
	MS PA 2-9T70	Réf.V210399	Double OF side by side
	MS PA 2-5 B2T70	Réf.W210400	OF Terminals 2.8 mm
71-72-73	MS PA 2-5	Réf.H210158	OF Standard
	MS PA 2-9V	Réf.J210159	Double OF side by side
	MS PA 2-5 B2	Réf.C210160	OF Terminals 2.8 mm

Microswitches supplied separately

Size	A	B	C	H	L ^{±1.5}	M	N	P	R
70	39,8	41,8	57	18	123,4	26,2	26,2	90	67
	1.57"	1.65"	2.24"	0.71"	4.86"	1.03"	1.03"	3.54"	2.64"
71	51	51	63	25	133,4	26,2	26,2	96	68
	2.00"	2.00"	2.48"	0.98"	5.25"	1.03"	1.03"	3.79"	2.68"
72	60	60	72	32	149,4	39,2	39,2	105	68
	2.36"	2.36"	2.84"	1.26"	5.88"	1.54"	1.54"	4.15"	2.68"
73	74,4	74,4	87,5	40	149,4	39,2	39,2	121	68
	2.93"	2.93"	3.45"	1.58"	5.88"	1.54"	1.54"	4.76"	2.68"

180° position trip indicator available under PV designation but no microswitch possible Fuse holder solution, see Gear and Fuse gear section

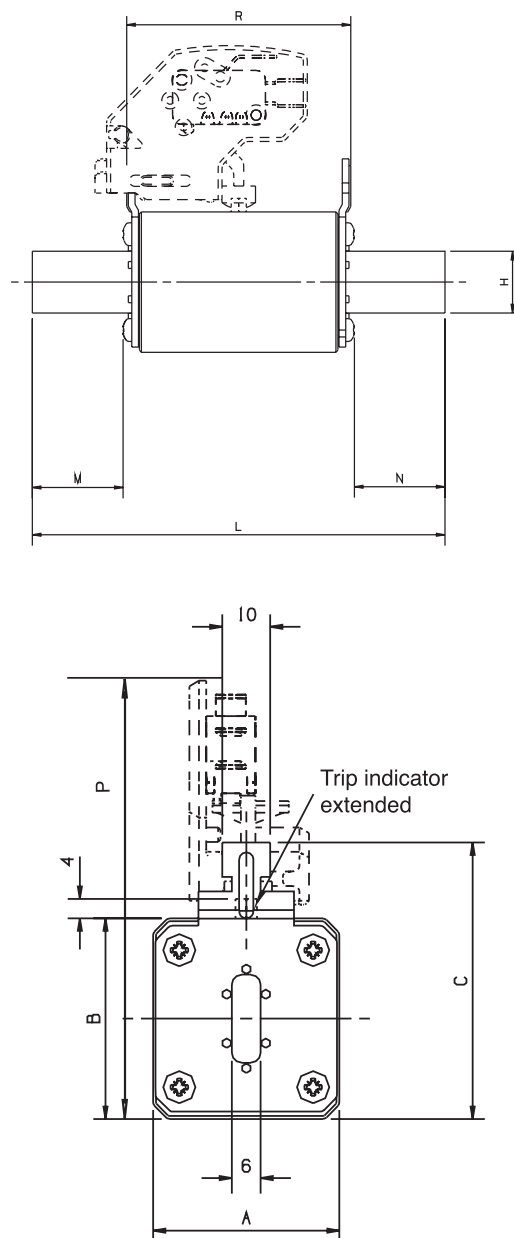





Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Times/Current Characteristics


Size 70

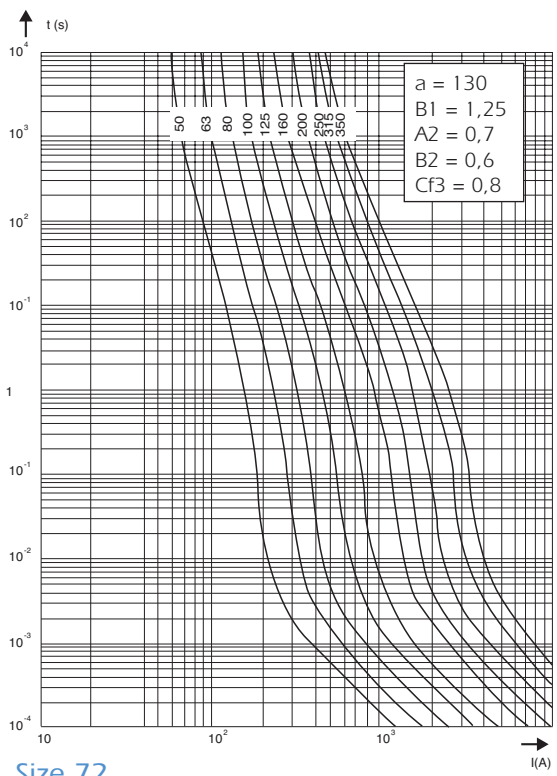


Size 71

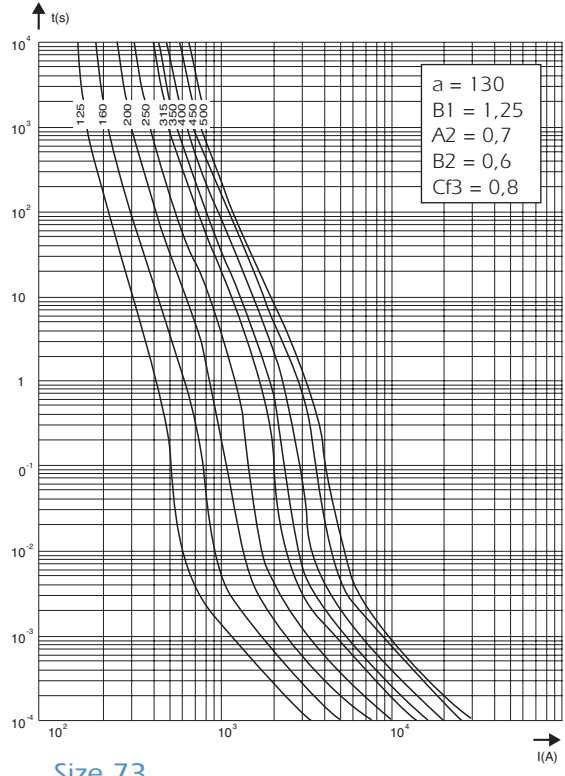

Size 72

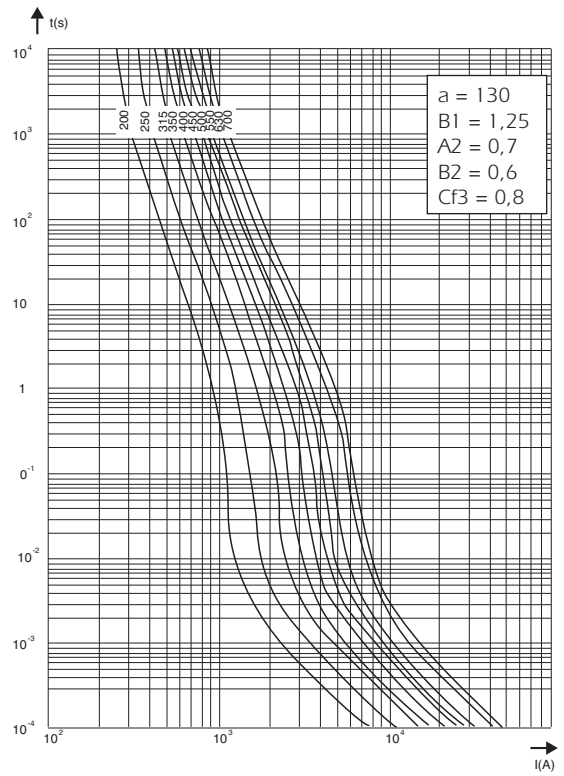

Size 73

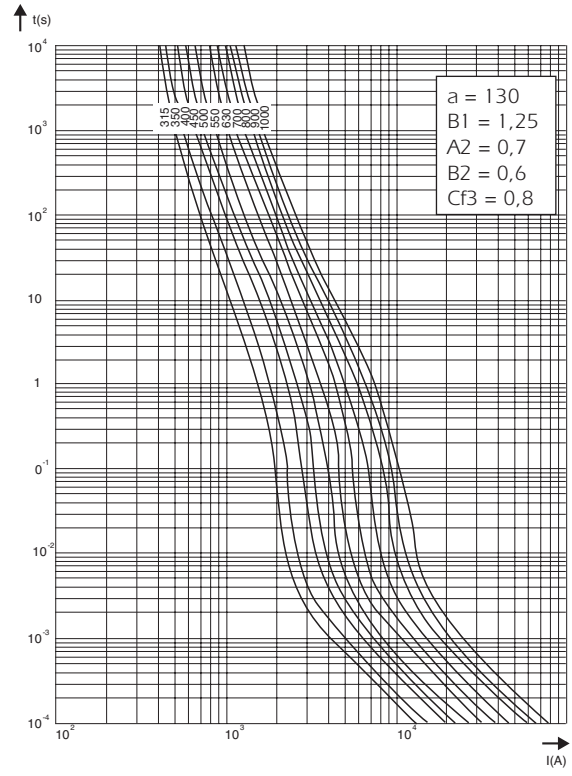





Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Cut off characteristics Peak let thru current


Size 70

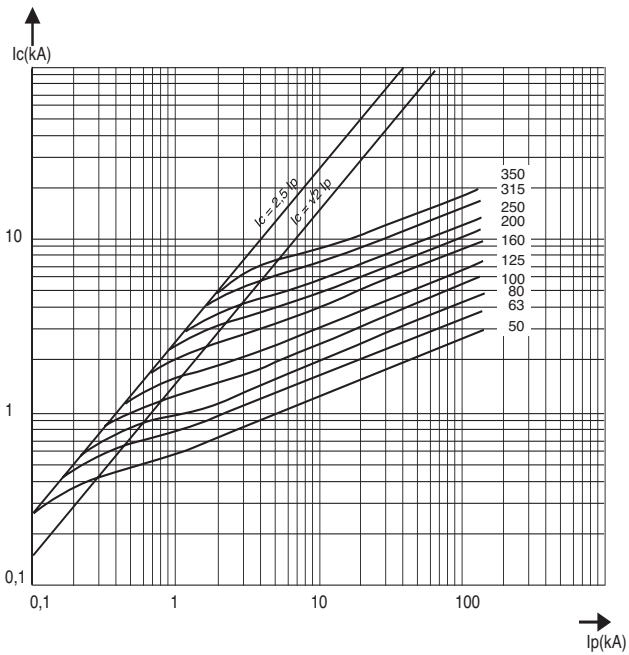


Size 71

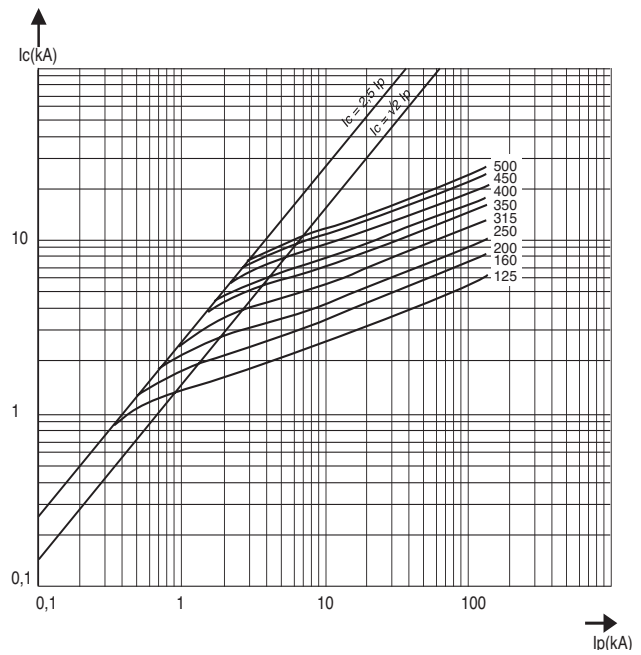

Size 72

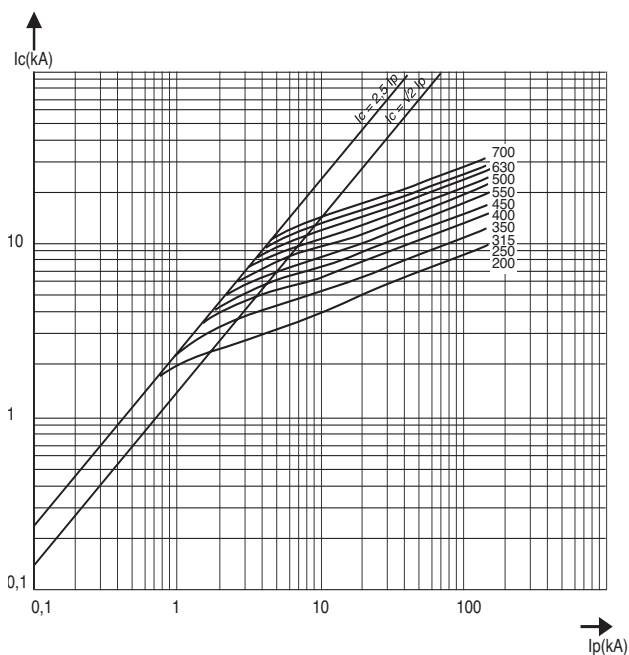

Size 73

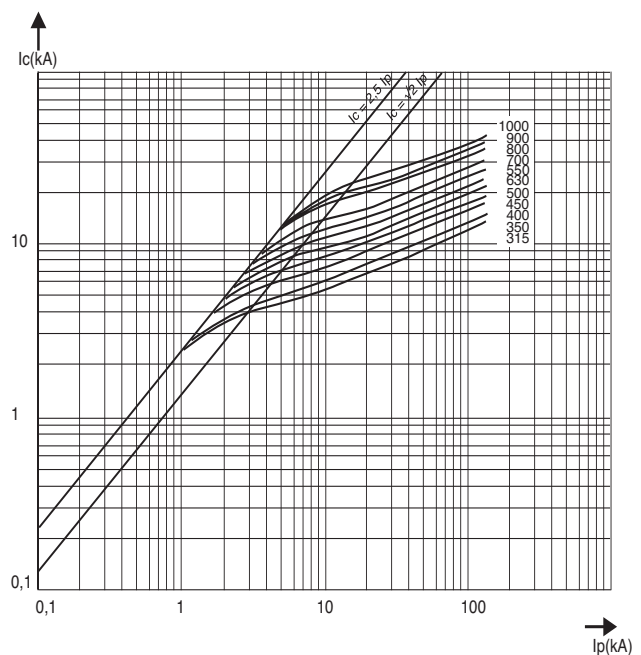




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


Total I²t and total operating time @ 690 V

Size 70

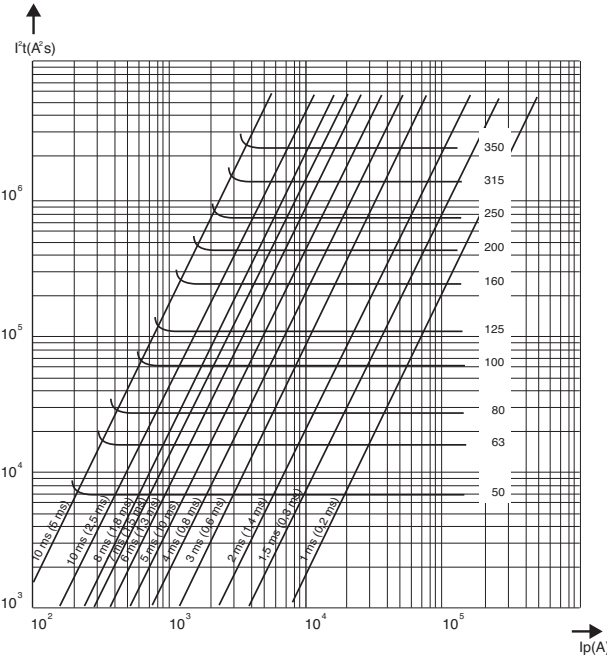


Value between parentheses pertain to prearcing I²t

Size 71

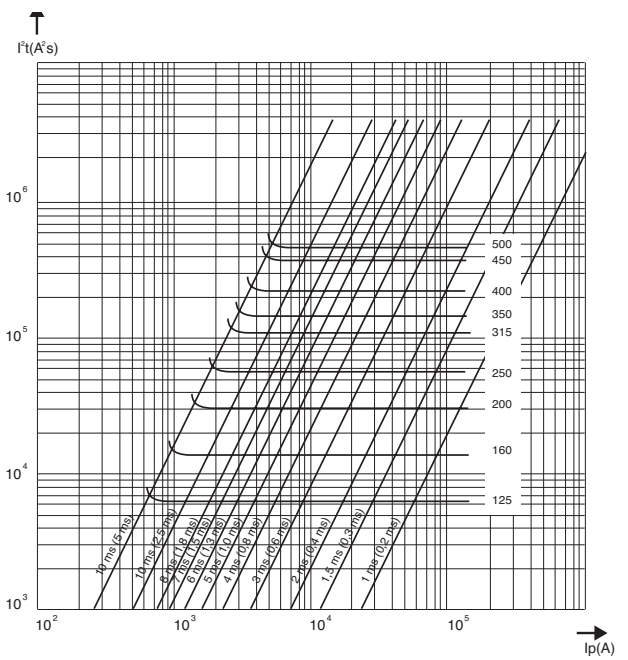


Size 72

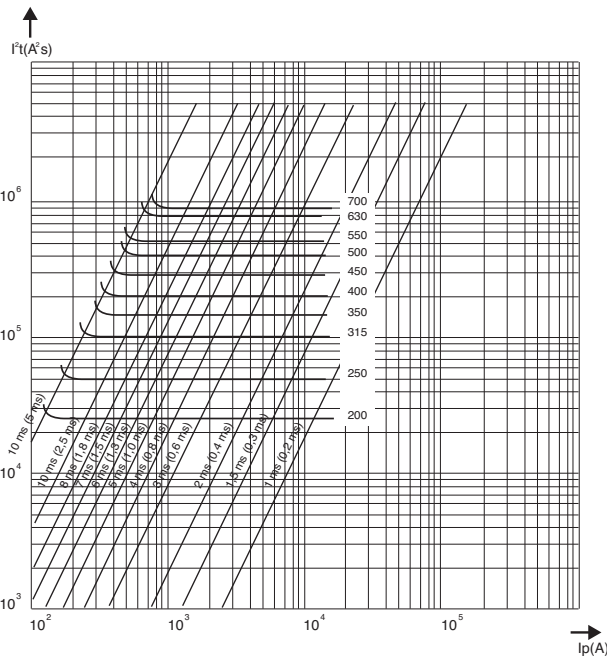

Value between parentheses pertain to prearcing I²t


Size 73

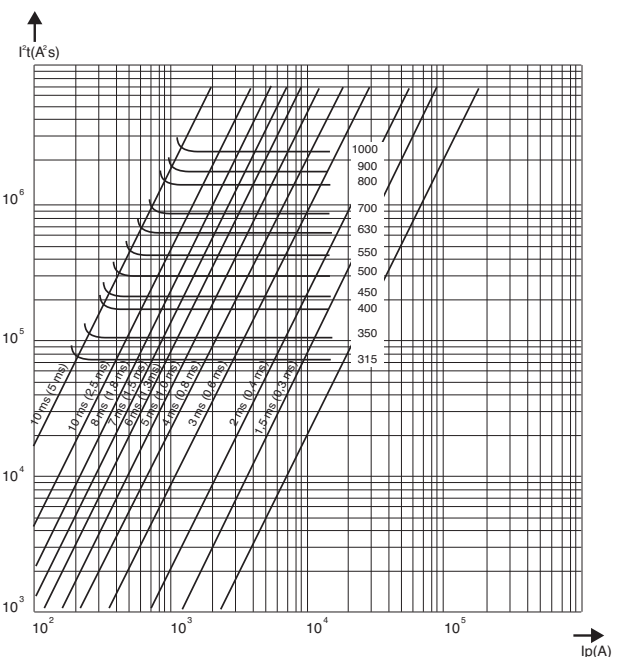




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


$k=f(U)$
Multiplier coefficient
to calculate total I^2t
and total operating time

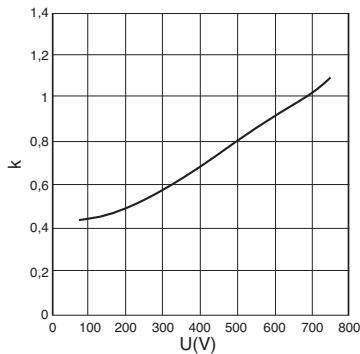

P/PN
Multiplier coefficient
to calculate the power
losses at various currents

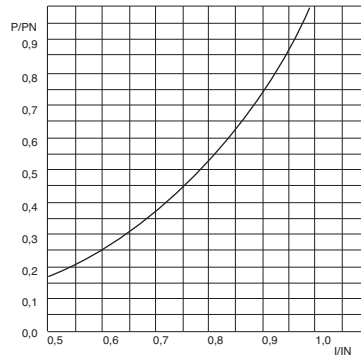

Peak arc voltage

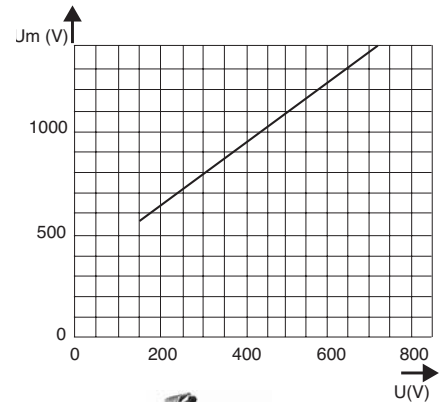

PA terminals fuse holder

Size	1 pole	2 poles	3 poles	4 poles	wall	separators	fuse shields
70	T218241	G218759	W219278	H222486	Z213669	V216724	K200822
71	A223008	G200796	Y201340	H201855	J214690	N217753	M222513
72	E211075	V211595	D212109	R212627	J214690	N217753	Y211621
73	X213644	B214154	F214664	K215174	Q215708	M218787	X212655




End contacts TTF terminal fuse holders

Size	1 pole
70/71	C301233
72/73	E301235



French blades EF terminal fuse holders

Size	SP/SE/SF
70	F096099
71	V098711
72	W098712
73	C209187



Din blades 110 mm DI N 43653 terminal fuse holders

Size	Fuses holders
70/71/72/73	L091941



Warning: for all holders, please check maximum fuse and fuse holders operating limit. in Gear and Fuse gear section
Tightning torque see Gear and Fuse gear section.

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Microswitches for PSC 70-73 Plain blades

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
PSC sizes 70, 71, 72, 73 PLAIN BLADES (PA)

MS PA 2-5



Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS PA 2-5	1500 V	20 V	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	9 kV	13 kV	V0
MS PA 2-9		50 mA		DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS PA 2-5 B2	1500 V	20 V/100 mA	5 A	50 Hz	4 A	4 A	5 A	-	5 A	5 A	12 kV	16 kV	V0

- * Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)
- ** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1
- *** Between power circuit and microswitch terminals

Exclusive "MS PA" indication systems are automatically resettable

Fuse size	Code	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
71-72-73	MS PA 2-5	H210158	OF Standard (fig. 7)	32,5	1	MSPA 2-5
	MS PA 2-9V	J210159	Double (fig.7) OF side by side	39,5	1	MSPA 2-9
	MS PA 2-5 B2	C210360	OF Terminals 2,8 (fig. 8)	27	1	MSPA 2-5B2
70	MS PA 2-5	T210398	OF Standard (fig.7)	31	1	MSPA 2-5T70
	MS PA 2-9	V210399	Double (fig.7) OF side by side	37	1	MSPA 2-9T70
	MS PA 2-5 B2	W210400	OF Terminals 2,8 (fig.8)	27	1	MSPA 2-5B2T70

MS PA...





Fig.7




Fig.8

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46


(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Times/Current Characteristics


Size 70

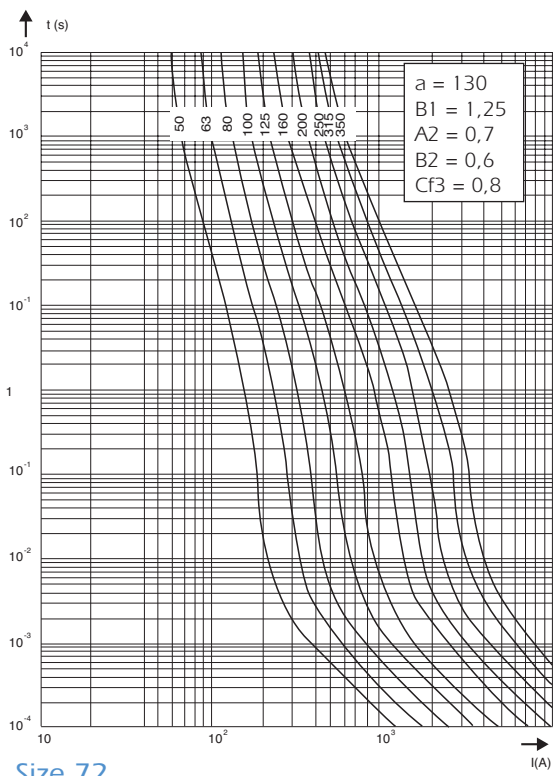


Size 71

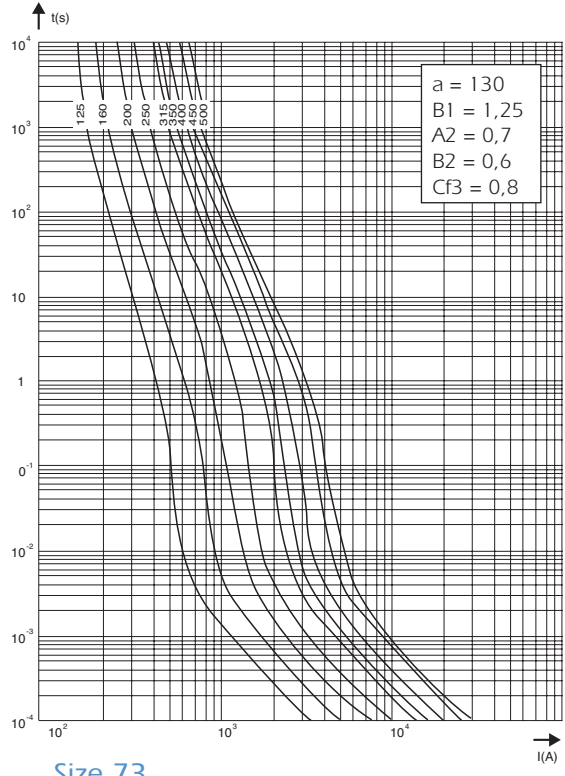

Size 72

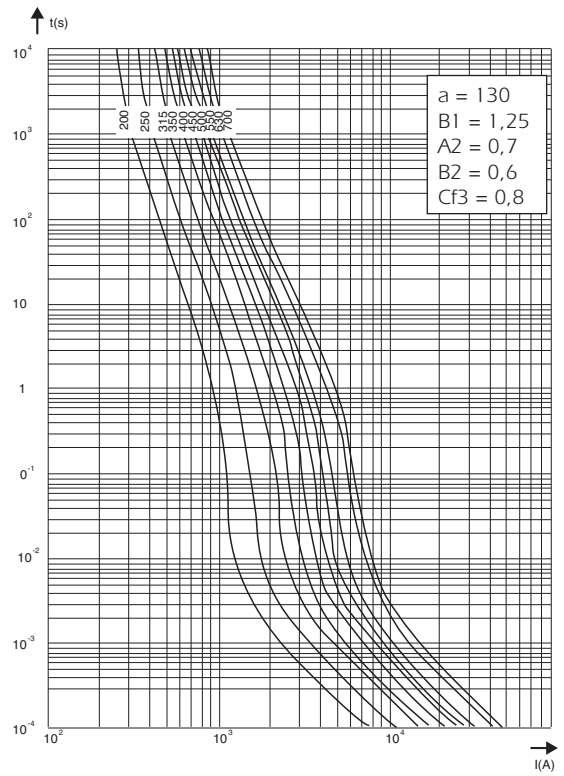

Size 73

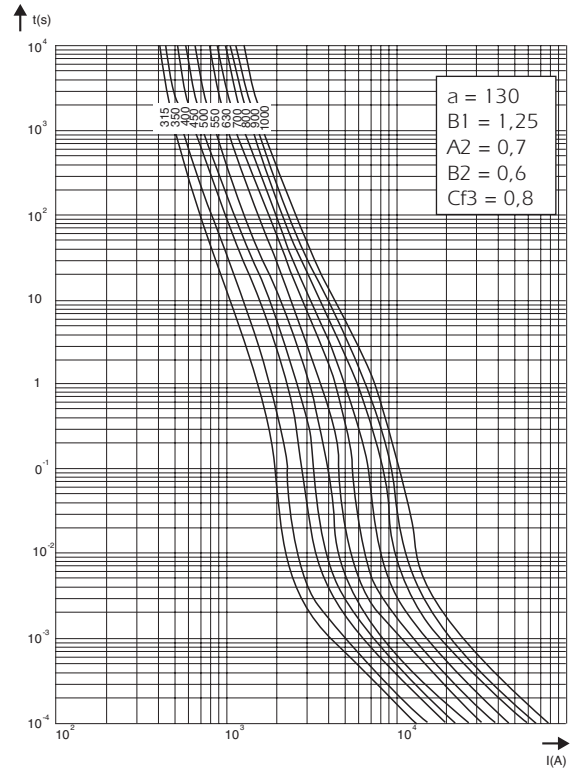





Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set

Cut off characteristics Peak let thru current


Size 70

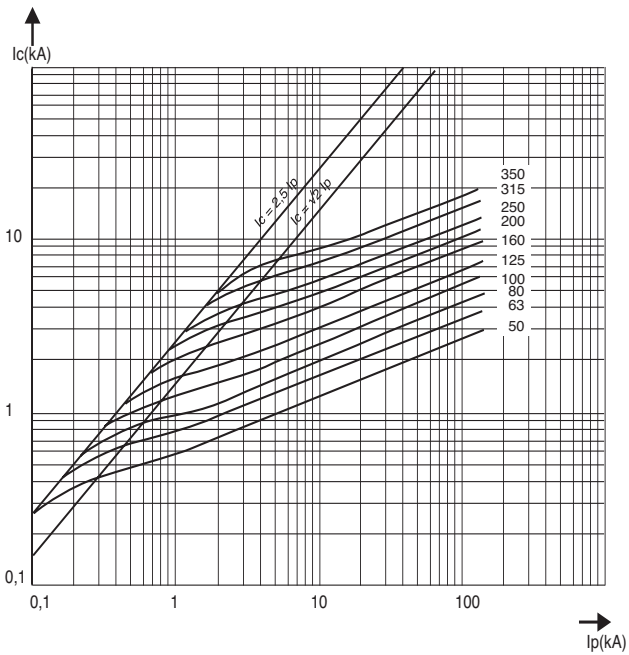


Size 71

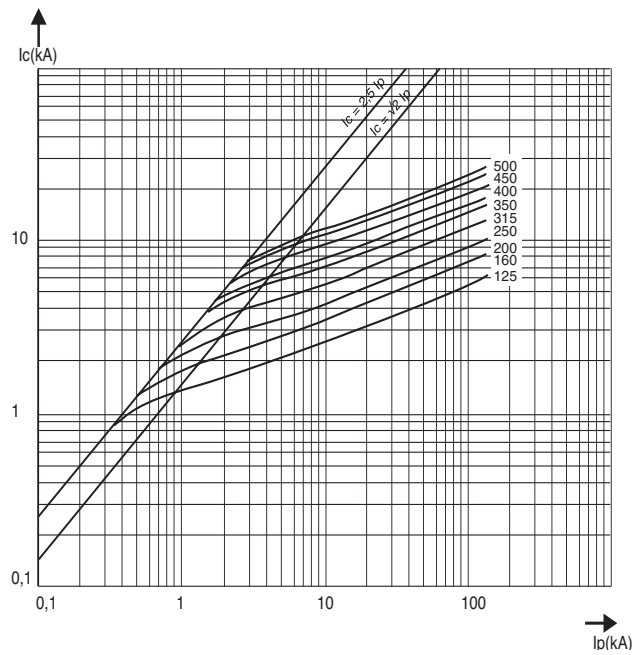

Size 72

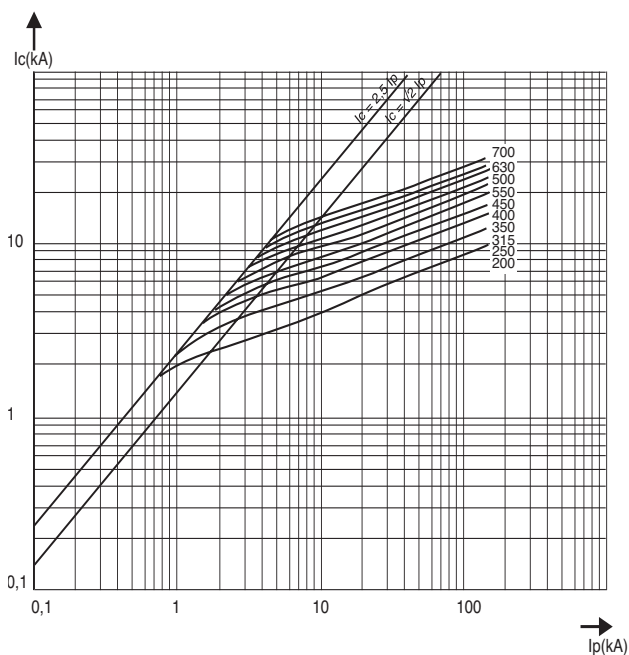

Size 73

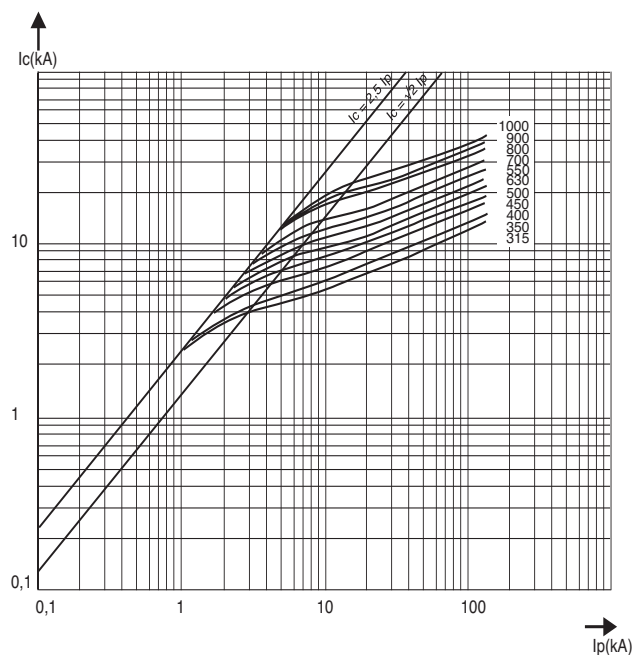




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


Total I²t and total operating time @ 690 V

Size 70

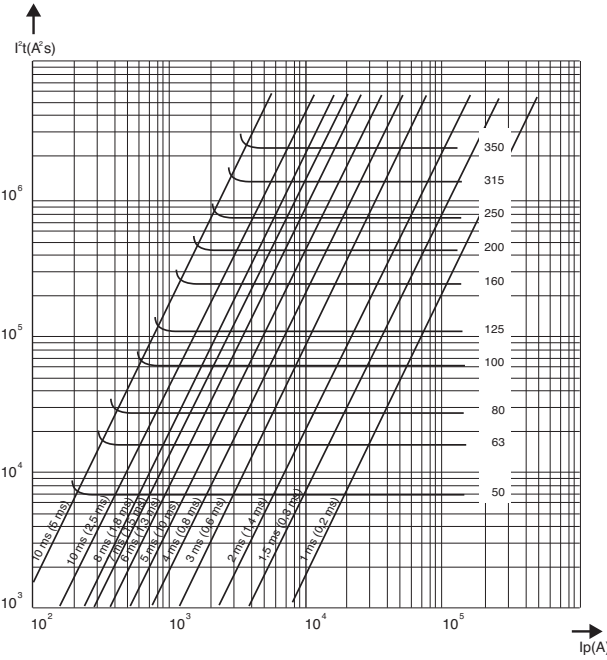


Value between parentheses pertain to prearcing I²t

Size 71

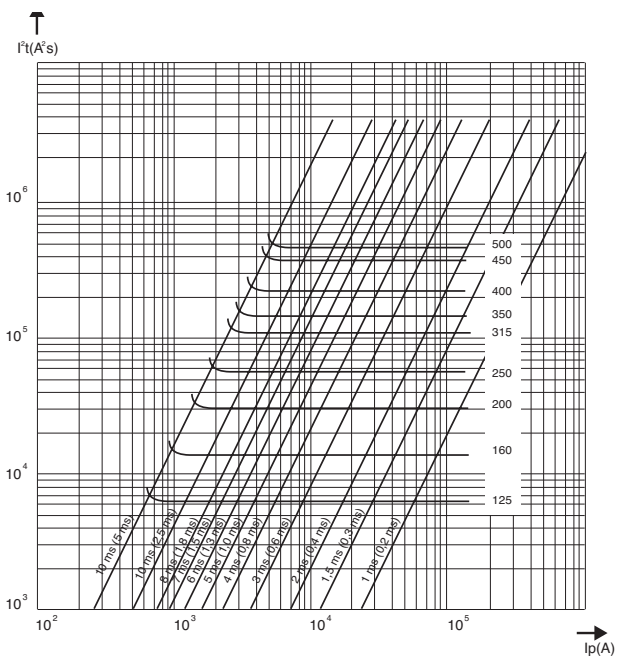


Size 72

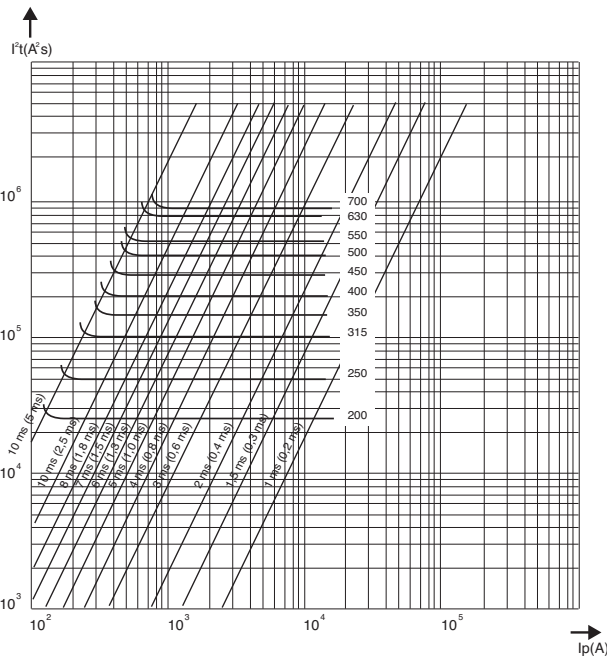

Value between parentheses pertain to prearcing I²t


Size 73

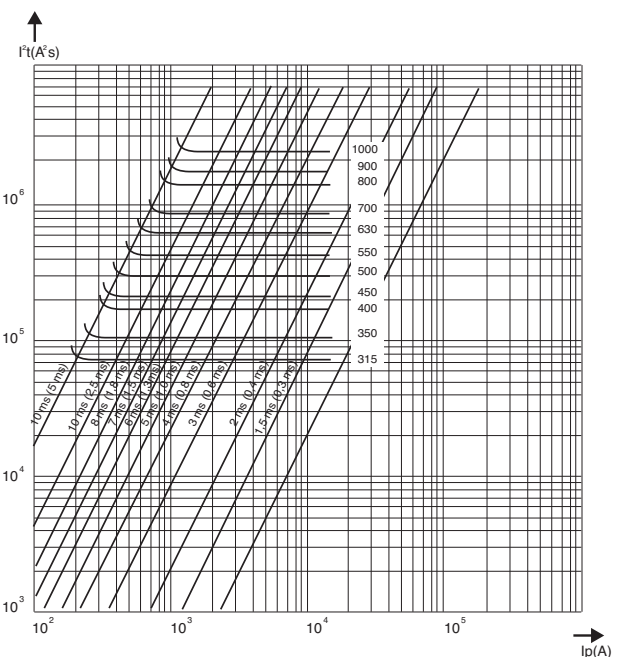




Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Curves set


$k=f(U)$
Multiplier coefficient
to calculate total I^2t
and total operating time

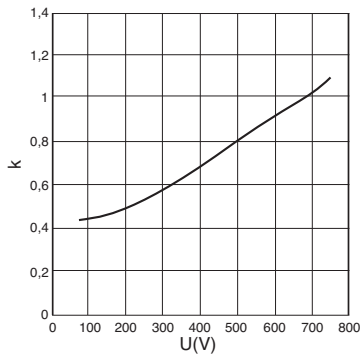

P/PN
Multiplier coefficient
to calculate the power
losses at various currents

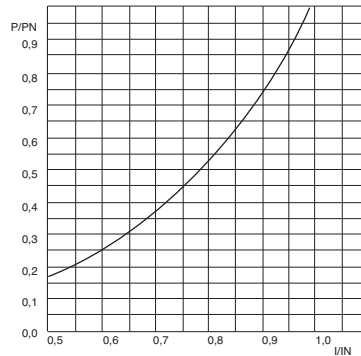

Peak arc voltage

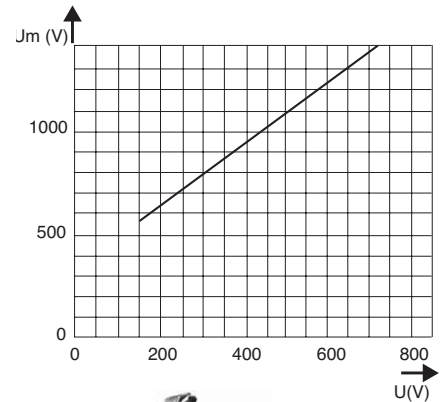

PA terminals fuse holder

Size	1 pole	2 poles	3 poles	4 poles	wall	separators	fuse shields
70	T218241	G218759	W219278	H222486	Z213669	V216724	K200822
71	A223008	G200796	Y201340	H201855	J214690	N217753	M222513
72	E211075	V211595	D212109	R212627	J214690	N217753	Y211621
73	X213644	B214154	F214664	K215174	Q215708	M218787	X212655




End contacts TTF terminal fuse holders

Size	1 pole
70/71	C301233
72/73	E301235




French blades EF terminal fuse holders

Size	SP/SE/SF
70	F096099
71	V098711
72	W098712
73	C209187



Din blades 110 mm DI N 43653 terminal fuse holders

Size	Fuses holders
70/71/72/73	L091941



Warning: for all holders, please check maximum fuse and fuse holders operating limit. in Gear and Fuse gear section
Tightning torque see Gear and Fuse gear section.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

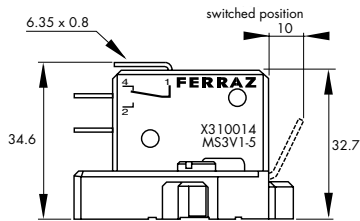


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

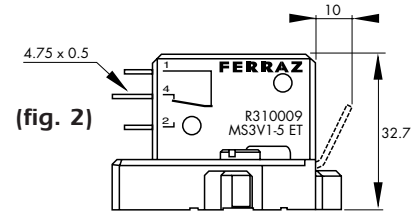


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

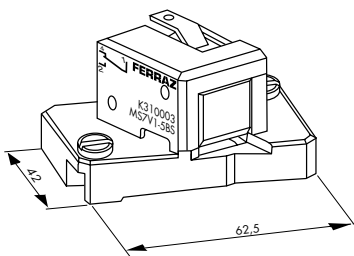

(fig. 5)

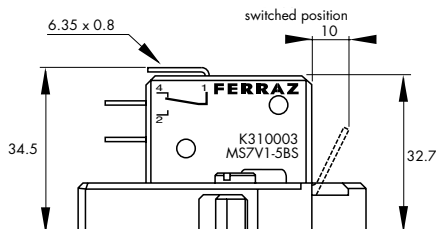


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

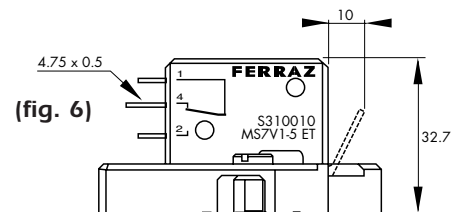


(fig. 6)

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Microswitches for PSC 70-73 Plain blades

MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

PSC sizes 70, 71, 72, 73 PLAIN BLADES (PA)

MS PA 2-5



Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS PA 2-5	1500 V	20 V	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	9 kV	13 kV	V0
MS PA 2-9		50 mA		DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS PA 2-5 B2	1500 V	20 V/100 mA	5 A	50 Hz	4 A	4 A	5 A	-	5 A	5 A	12 kV	16 kV	V0

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals

Exclusive "MS PA" indication systems are automatically resettable

Fuse size	Code	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
71-72-73	MS PA 2-5	H210158	OF Standard (fig. 7)	32,5	1	MSPA 2-5
	MS PA 2-9V	J210159	Double (fig.7) OF side by side	39,5	1	MSPA 2-9
	MS PA 2-5 B2	C210360	OF Terminals 2,8 (fig. 8)	27	1	MSPA 2-5B2
70	MS PA 2-5	T210398	OF Standard (fig.7)	31	1	MSPA 2-5T70
	MS PA 2-9	V210399	Double (fig.7) OF side by side	37	1	MSPA 2-9T70
	MS PA 2-5 B2	W210400	OF Terminals 2,8 (fig.8)	27	1	MSPA 2-5B2T70

MS PA...





Fig.7




Fig.8

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

 Recognized

650 to 1300VAC / 63 to 2800A.

- Exceptionally low I²T, Watt losses.
- Non-magnetic construction, highly reliable low voltage.
- Indicator system.
- Conformity to UL, CSA investigated, IEC, DIN and VDE standards.
- Increased technical performance
- Higher ratings.
- Reduction in volume and weight.
- This fuse preselection table indicates, for each size:
 - rated current (or rating) I_n
 - pre-arcing I²t (I²t_p) at 1 ms
 - total operating I²t (I²t_t) at 1000 V and 850V(I)f=50Hz, cos φ =0.15, and for a total operating time from 8 to 10 ms
 - dissipated power P_n at the rated current I_n, and at 0.8 I_n, in steady state
 - breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.



Estimated breaking capacity: 300 kA

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 1000V (*) @ U _n (kA ² s)	Power (W)		Tested Breaking capacity				
	IEC	UL				End contacts	Blades	IEC	USA			
70	1250	1300	50	0,116	0,7	16	16	100kA @ 1250V	100kA @ 1300V			
			63	0,210	1,2	26	26					
			80	0,470	2,7	27	27					
			100	0,830	4,8	30	30					
			125	1,30	7,5	38	38					
			160	2,55	15	45	45					
	1200	1300	200	4,7	27	54	56	100kA @ 1200V	100kA @ 1300V			
			250	9,6	55	58	61					
			280	14	82	61	64					
			315	20	115	66	72					
			350	28	158	68	75					
			400	39	224	81	90					
1100	1200	450	62	356	82	82	150kA @ 1100V	150kA @ 1200V				
		500	84	483	83	83						
		800	900	550	128	576(*)			83	83	120kA @ 1000V	120kA @ 1100V
1000	1100	550	128	576(*)	83	83	100kA @ 800V	100kA @ 900V				
		750	800	630	176	730(*)			91	91	100kA @ 750V	100kA @ 800V
		160	2,6	15	46	46			100kA @ 1250V	100kA @ 1300V		
1250	1300	200	4,7	27	54	54						
		250	8,9	51	61	61						
		280	12	68	68	70						
		315	16	92	73	76						
		350	22	127	76	80						
		400	38	220	76	80						
1100	1200	450	47	270	87	95	150kA @ 1100V	150kA @ 1200V				
		500	68	390	90	X						
		500	68	390	X	100						
		550	84	485	98	112						
		630	125	725	105	X						
		630	125	725	X	120						
1000	1100	700	180	1040	105	105	150kA @ 1000V	150kA @ 1100V				
		900	950	800	290	1540(*)			116	116	100kA @ 900V	100kA @ 950V
		800	850	900	446	2010(*)			120	120	100kA @ 800V	100kA @ 850V

(¹) at 850 V

(²) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I _{pt} @ 1ms (kA _{2s})	Total I ² t @ 1000V (*) @ U _N (kA _{2s})	Power (W)		Tested Breaking capacity Estimated B.C 300 kA		
	IEC	UL				End contacts	Blades	IEC	USA	
72	1250	1300	280	10	60	72	72	100kA @ 1250V	100kA @ 1300V	
			315	15	87	76	76			
			350	21	120	77	77			
			400	32,5	190	80	80			
			450	44	255	87	89			
			500	57	330	94	98			
	550	68	390	110	120					
	630	105	610	113	X					
	1100	1200	630	105	610	X	125	150kA @ 1100V	150kA @ 1200V	
			700	145	815	122	140			
			800	215	1240	125	146			
	1000	1100	700	145	815	X	140	150kA @ 1000V	150kA @ 1100V	
800			215	1240	X	146				
900			312	1800	130	152				
850	900	1000	439	2150(*)	136	136	100kA @ 850V	100kA @ 900V		
73	1250	1300	315	12	68	84	84	100kA @ 1250V	100kA @ 1300V	
			350	17	100	86	86			
			375	19	110					
			400	25	145	93	93			
			450	35,5	205	99	100			
			500	44	255	110	112			
			550	57	330	116	120			
			630	84	485	125	132			
			700	110	640	135	X			
			800	190	1090	136	X			
	1200	1300	700	110	640	X	146	100kA @ 1200V	100kA @ 1300V	
			900	250	1090	150	X			
			900	190	1090	X	148	150kA @ 1100V	150kA @ 1200V	
	1100	1200	900	250	1440	X	170	150kA @ 1000V	150kA @ 1100V	
			1000	370	2130	152	168			
	1000	1100	1100	445	2555	168	208			
			950	1000	1100	445	2430(*)	168	X	150kA @ 950V
	900	1000	1000	370	1920(*)	X	174	150kA @ 900V	150kA @ 1000V	
			1100	445	2280(*)	X	208			
			1250	585	3080(*)	186	X			
	1400	1000	1400	755	4100(*)	210	X			
850			900	1400	755	3700(*)	210	X	150kA @ 850V	150kA @ 900V
690	700	1500	1180	4750(*)	200	X	180kA @ 690V	180kA @ 700V		
		1600	1430	5740(*)	203	X				
600	650	1800	2040	7150(*)	206	X	120kA @ 600V	120kA @ 650V		
2 x 72	1250	1300	630	60	348	160		100kA @ 1250V		
			700	84	480	162				
			800	130	760	168				
			900	176	1020	183				
			1000	228	1320	197				
			1100	272	1560	231				
	1100	1200	1250	426	2440	237		100kA @ 1100V		
			1400	568	3260	256				
			1600	860	4895	262		100kA @ 1000V		
	1000	1100	1800	1250	6350(*)	275		100kA @ 900V		
			2000	1760	7570(*)	285		100kA @ 750V		
	900	1000	2200	2410	8350(*)	320		100kA @ 650V		
			2500	3470	12000(*)	340				
	2 x 73	1250	1300	800	100	580	195		100kA @ 1250V	
				900	142	820	208			
1000				176	1000	231				
1100				228	1300	244				
1250				336	1900	262				
1100		1200	1400	440	2600	283		100kA @ 1100V		
			1600	760	4400	286				
			1800	1000	5800	315				
1000		1100	2000	1480	8500	319		120kA @ 1000V		
			2200	1780	9632(*)	353		100kA @ 950V		
900		1000	2500	2340	12075(*)	390		110kA @ 900V		
			2800	3000	15000(*)	440		100kA @ 850V		
850		900	3000	4980	15700(*)	405		200kA @ 600V		
			3200	5720	19030(*)	426				
600		650	3600	8160	25200(*)	430		200kA @ 550V		

(1) at 850 V

(2) does not exist with blades

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

 Recognized

650 to 1300VAC / 63 to 2800A.

- Exceptionally low I²T, Watt losses.
- Non-magnetic construction, highly reliable low voltage.
- Indicator system.
- Conformity to UL, CSA investigated, IEC, DIN and VDE standards.
- Increased technical performance
- Higher ratings.
- Reduction in volume and weight.
- This fuse preselection table indicates, for each size:
 - rated current (or rating) I_n
 - pre-arcing I²t (I²t_p) at 1 ms
 - total operating I²t (I²t_t) at 1000 V and 850V(I)f=50Hz, cos φ =0.15, and for a total operating time from 8 to 10 ms
 - dissipated power P_n at the rated current I_n, and at 0.8 I_n, in steady state
 - breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.



Estimated breaking capacity: 300 kA

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 1000V (*) @ U _n (kA ² s)	Power (W)		Tested Breaking capacity				
	IEC	UL				End contacts	Blades	IEC	USA			
70	1250	1300	50	0,116	0,7	16	16	100kA @ 1250V	100kA @ 1300V			
			63	0,210	1,2	26	26					
			80	0,470	2,7	27	27					
			100	0,830	4,8	30	30					
			125	1,30	7,5	38	38					
			160	2,55	15	45	45					
	1200	1300	200	4,7	27	54	56	100kA @ 1200V	100kA @ 1300V			
			250	9,6	55	58	61					
			280	14	82	61	64					
			315	20	115	66	72					
			350	28	158	68	75					
			400	39	224	81	90					
1100	1200	450	62	356	82	82	150kA @ 1100V	150kA @ 1200V				
		500	84	483	83	83						
		800	900	550	128	576(*)			83	83	120kA @ 1000V	120kA @ 1100V
750	800	550	128	576(*)	83	83	100kA @ 800V	100kA @ 900V				
		630	176	730(*)	91	91	100kA @ 750V	100kA @ 800V				
		160	2,6	15	46	46	100kA @ 1250V	100kA @ 1300V				
1250	1300	200	4,7	27	54	54						
		250	8,9	51	61	61						
		280	12	68	68	70						
		315	16	92	73	76						
		350	22	127	76	80						
		400	38	220	76	80						
		450	47	270	87	95						
		1100	1300 (TTI)	500	68	390			90	X	150kA @ 1100V	150kA @ 1200V
				500	68	390			X	100		
				550	84	485			98	112		
		1000	1100	630	125	725			105	X	150kA @ 1000V	150kA @ 1100V
				630	125	725	X	120				
700	180			1040	105	105						
900	950	800	290	1540(*)	116	116	100kA @ 900V	100kA @ 950V				
		800	850	900	446	2010(*)	120	120	100kA @ 800V	100kA @ 850V		

(¹) at 850 V

(²) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I _{pt} @ 1ms (kA _{2s})	Total I ² t @ 1000V (*) @ U _N (kA _{2s})	Power (W)		Tested Breaking capacity Estimated B.C 300 kA	
	IEC	UL				End contacts	Blades	IEC	USA
72	1250	1300	280	10	60	72	72	100kA @ 1250V	100kA @ 1300V
			315	15	87	76	76		
			350	21	120	77	77		
			400	32,5	190	80	80		
			450	44	255	87	89		
			500	57	330	94	98		
	550	68	390	110	120				
	630	105	610	113	X				
	1100	1200	630	105	610	X	125	150kA @ 1100V	150kA @ 1200V
			700	145	815	122	140		
			800	215	1240	125	146		
	1000	1100	700	145	815	X	140	150kA @ 1000V	150kA @ 1100V
800			215	1240	X	146			
900			312	1800	130	152			
850	900	1000	439	2150(*)	136	136	100kA @ 850V	100kA @ 900V	
73	1250	1300	315	12	68	84	84	100kA @ 1250V	100kA @ 1300V
			350	17	100	86	86		
			375	19	110				
			400	25	145	93	93		
			450	35,5	205	99	100		
			500	44	255	110	112		
			550	57	330	116	120		
			630	84	485	125	132		
			700	110	640	135	X		
			800	190	1090	136	X		
	1200	1300	700	110	640	X	146	100kA @ 1200V	100kA @ 1300V
			900	250	1090	150	X		
			800	190	1090	X	148	150kA @ 1100V	150kA @ 1200V
	1100	1200	900	250	1440	X	170	150kA @ 1000V	150kA @ 1100V
			1000	370	2130	152	168		
	1000	1100	1100	445	2555	168	208		
			950	445	2430(*)	168	X	150kA @ 950V	150kA @ 1000V
	900	1000	1000	370	1920(*)	X	174	150kA @ 900V	150kA @ 1000V
			1100	445	2280(*)	X	208		
			1250	585	3080(*)	186	X		
	1400	1000	1400	755	4100(*)	210	X		
850			755	3700(*)	210	X	150kA @ 850V	150kA @ 900V	
690	700	1500	1180	4750(*)	200	X	180kA @ 690V	180kA @ 700V	
		1600	1430	5740(*)	203	X			
600	650	1800	2040	7150(*)	206	X	120kA @ 600V	120kA @ 650V	
2 x 72	1250	1300	630	60	348	160		100kA @ 1250V	
			700	84	480	162			
			800	130	760	168			
			900	176	1020	183			
			1000	228	1320	197			
			1100	272	1560	231			
	1100	1200	1250	426	2440	237		100kA @ 1100V	
			1400	568	3260	256			
			1600	860	4895	262		100kA @ 1000V	
	1000	1100	1800	1250	6350(*)	275		100kA @ 900V	
			2000	1760	7570(*)	285		100kA @ 750V	
	900	1000	2200	2410	8350(*)	320		100kA @ 650V	
			2500	3470	12000(*)	340			
			800	100	580	195			
	2 x 73	1250	1300	900	142	820	208		100kA @ 1250V
1000				176	1000	231			
1100				228	1300	244			
1250				336	1900	262			
1400				440	2600	283			
1100		1200	1600	760	4400	286		100kA @ 1100V	
			1800	1000	5800	315			
			2000	1480	8500	319		120kA @ 1000V	
1000		1100	2200	1780	9632(*)	353		100kA @ 950V	
			2500	2340	12075(*)	390		110kA @ 900V	
900		1000	2800	3000	15000(*)	440		100kA @ 850V	
			3000	4980	15700(*)	405			
850		900	3200	5720	19030(*)	426		200kA @ 600V	
			3600	8160	25200(*)	430		200kA @ 550V	

(1) at 850 V

(2) does not exist with blades

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC American Terminals - 70 - 73 End contacts



Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
70	A130URD 70 TTI 0063	Q301015	350	3	A130UD70TTI63
	A130URD 70 TTI 0080	R301016			A130UD70TTI80
	A130URD 70 TTI 0100	S301017			A130UD70TTI100
	A130URD 70 TTI 0125	T301018			A130UD70TTI125
	A130URD 70 TTI 0160	V301019			A130UD70TTI160
	A130URD 70 TTI 0200	W301020			A130UD70TTI200
	A130URD 70 TTI 0250	X301021			A130UD70TTI250
	A130URD 70 TTI 0280	Y301022			A130UD70TTI280
	A130URD 70 TTI 0315	Z301023			A130UD70TTI315
	A120URD 70 TTI 0350	A301024			A120UD70TTI350
71	A130URD 71 TTI 0160	B301025	500	3	A130UD71TTI160
	A130URD 71 TTI 0200	C301026			A130UD71TTI200
	A130URD 71 TTI 0250	D301027			A130UD71TTI250
	A130URD 71 TTI 0280	E301028			A130UD71TTI280
	A130URD 71 TTI 0315	F301029			A130UD71TTI315
	A130URD 71 TTI 0350	G301030			A130UD71TTI350
	A130URD 71 TTI 0400	H301031			A130UD71TTI400
	A130URD 71 TTI 0450	J301032			A130UD71TTI450
	A130URD 71 TTI 0500	K301033			A130UD71TTI500
	A120URD 71 TTI 0550	L301034			A120UD71TTI550
72	A120URD 71 TTI 0630	M301035	850	3	A120UD71TTI630
	A130URD 72 TTI 0280	N301036			A130UD72TTI280
	A130URD 72 TTI 0315	P301037			A130UD72TTI315
	A130URD 72 TTI 0350	Q301038			A130UD72TTI350
	A130URD 72 TTI 0400	R301039			A130UD72TTI400
	A130URD 72 TTI 0450	S301040			A130UD72TTI450
	A130URD 72 TTI 0500	T301041			A130UD72TTI500
	A130URD 72 TTI 0550	V301042			A130UD72TTI550
	A130URD 72 TTI 0630	W301043			A130UD72TTI630
	A120URD 72 TTI 0700	X301044			A120UD72TTI700
73	A120URD 72 TTI 0800	Y301045	1250	3	A120UD72TTI800
	A130URD 73 TTI 0315	Z301046			A130UD73TTI315
	A130URD 73 TTI 0350	A301047			A130UD73TTI350
	A130URD 73 TTI 0400	B301048			A130UD73TTI400
	A130URD 73 TTI 0450	C301049			A130UD73TTI450
	A130URD 73 TTI 0500	D301050			A130UD73TTI500
	A130URD 73 TTI 0550	E301051			A130UD73TTI550
	A130URD 73 TTI 0630	F301052			A130UD73TTI630
	A130URD 73 TTI 0700	G301053			A130UD73TTI700
	A130URD 73 TTI 0800	H301054			A130UD73TTI800
	A130URD 73 TTI 0900 **	J301055			A130UD73TTI900
	A110URD 73 TTI 1000 **	K301056			A110UD73TTI1000
	A100URD 73 TTI 1100 **	L301057			A100UD73TTI1100
	A100URD 73 TTI 1250 **	M301058			A100UD73TTI1250
	A090URD 73 TTI 1400 **	N301059			A090UD73TTI1400
	A070URD 73 TTI 1600 **	O300877			A070UD73TTI1600
A065URD 73 TTI 1800 **	R300878	A065UD73TTI1800			

Size	A	B	C	D	E±1	d	G±0.1	P±0.1
70	40 1-9/16"	46,5 1-27/32"	82 3-7/32"	26 1-1/64"	74 2-29/32"	5/16"-18	9 23/64"	6 15/64"
71	51 2"	56,5 2-7/32"	91 3-37/64"	30 1-3/16"	74 2-29/32"	5/16"-18	9 23/64"	9 23/64"
72	60 2-3/8"	65,5 2-37/64"	100 3-15/16"	38 ; (42mm **) 1-1/2" ; (1-21/32" **)	74 2-29/32"	3/8"-16	15 19/32"	9 23/64"
73	74,5 2-15/16"	79,5 3-1/8"	114 4-1/2"	46 ; (52mm **) 1-13/16" ; (2-1/16" **)	74 2-29/32"	1/2"-13	15 19/32"	9 23/64"

Note:

Dimensions in mm


Dimensions in inches

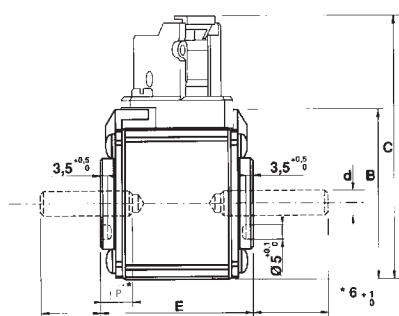

Microswitches and threaded studs supplied separately

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Multiplier coefficient

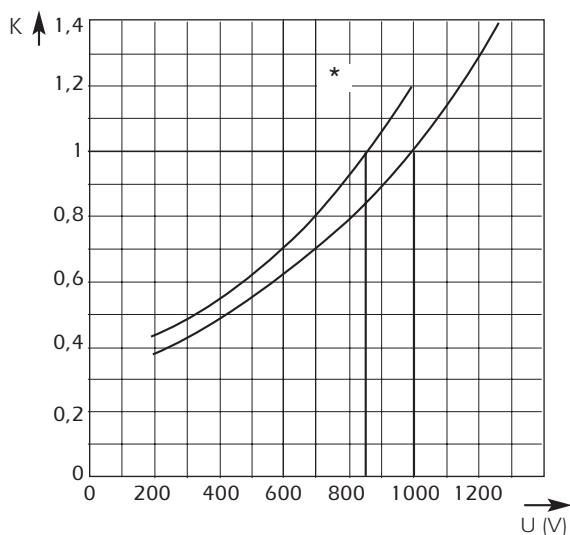

Left: Mean curve indicating variation of total I^2t (I^2t_t) and total operating time T_t in accordance with working voltage U .


Example:
Fuse 350 A in size 70.
 $I_p = 10\,000$ A $U = 1100$ V

At 1000 V
 $I^2t_t = 115\,000$ A²s $T_t = 7$ ms

At 1100 V
 $I^2t_t = 115\,000 \times 1.13 = 130\,000$ A²s
 $T_t = 7 \times 1.13 = 7.9$ ms


* curve for fuses with I^2t published at 850VAC

Dissipated power

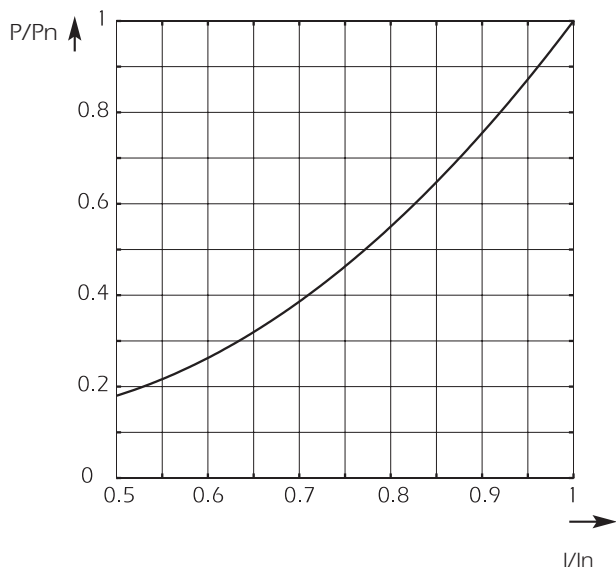

Above left: Curve enabling calculation of dissipated power P by a fuse rated I_n , as a function of the RMS current I , in multiples of I_n , in steady state.

Arc voltage

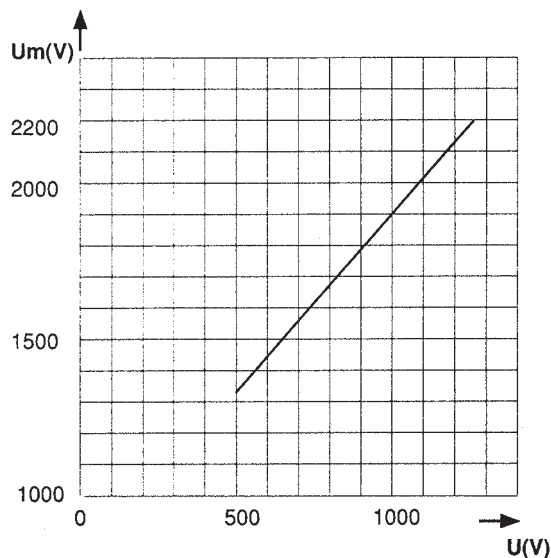

Above right: Curve indicating peak arc voltage U_m which may appear across fuse terminals as a function of working voltage U at $\cos \varphi = 0.15$




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 70

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

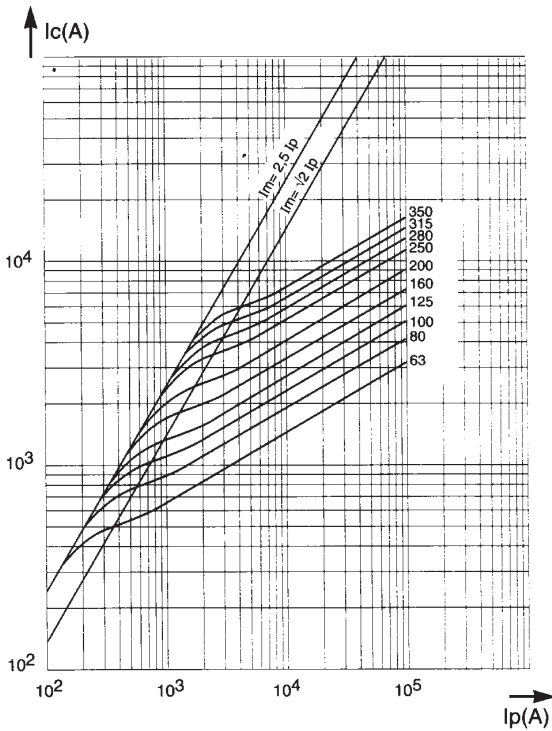

Time-current characteristics

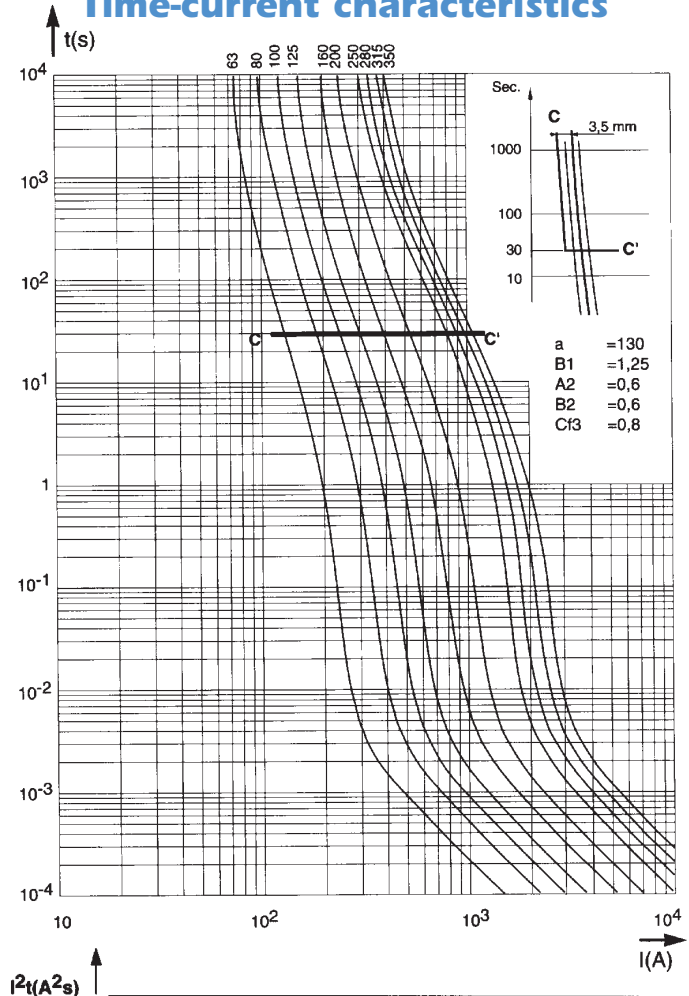


Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times


Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

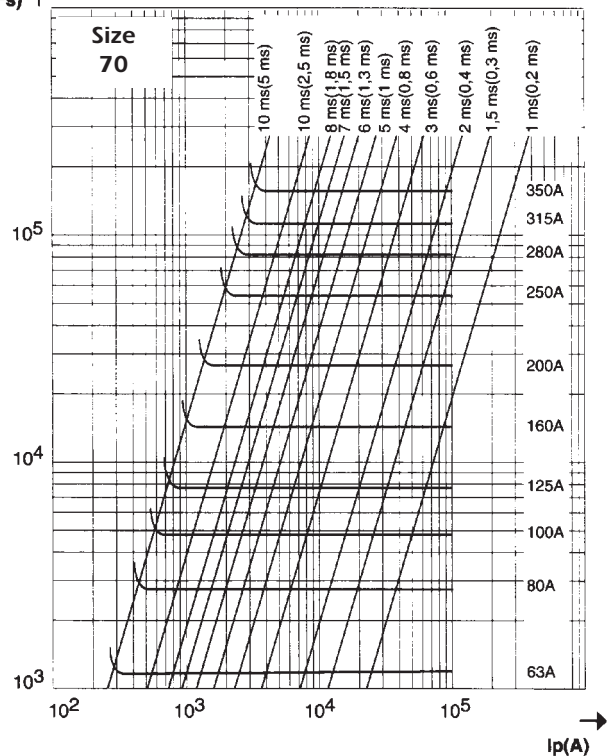

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

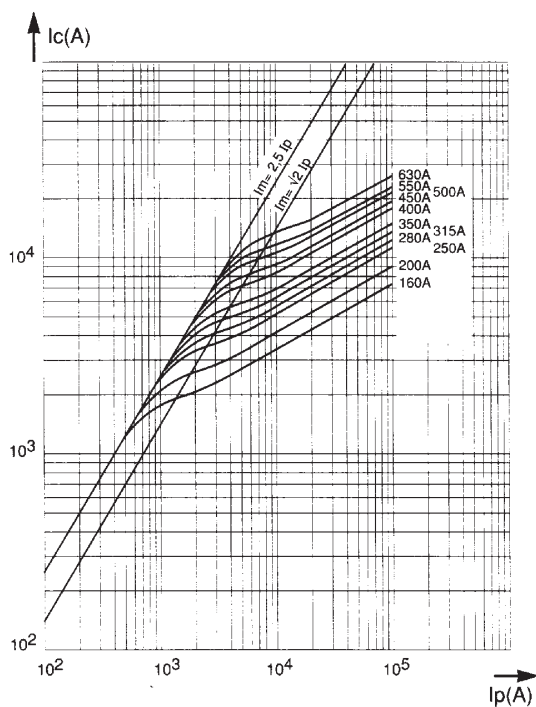

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

Size 71

Time-current characteristics

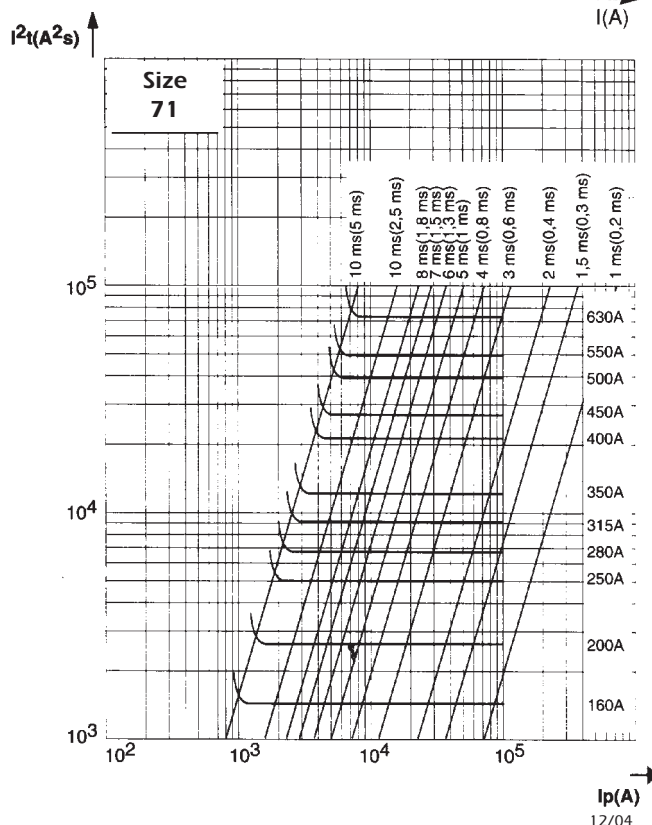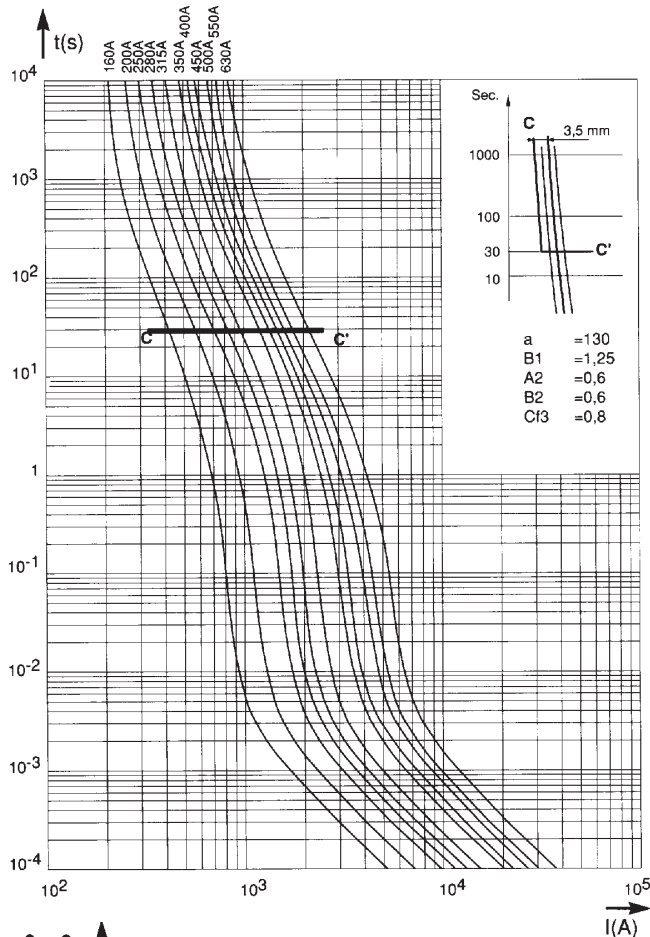




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 72

Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

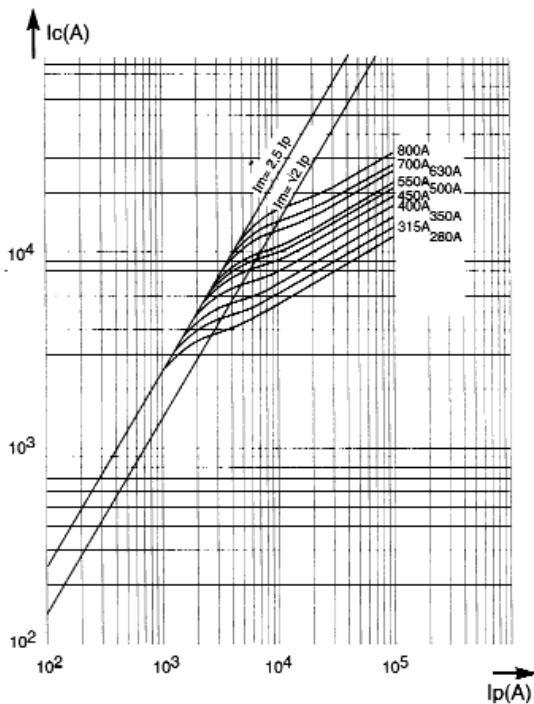

Time-current characteristics

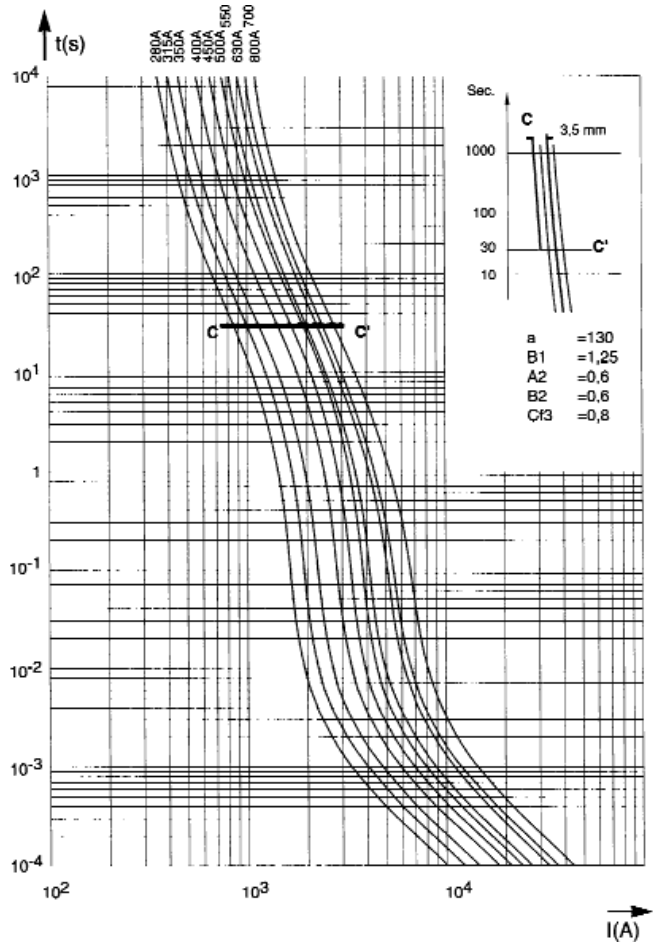

Time-current characteristics


Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

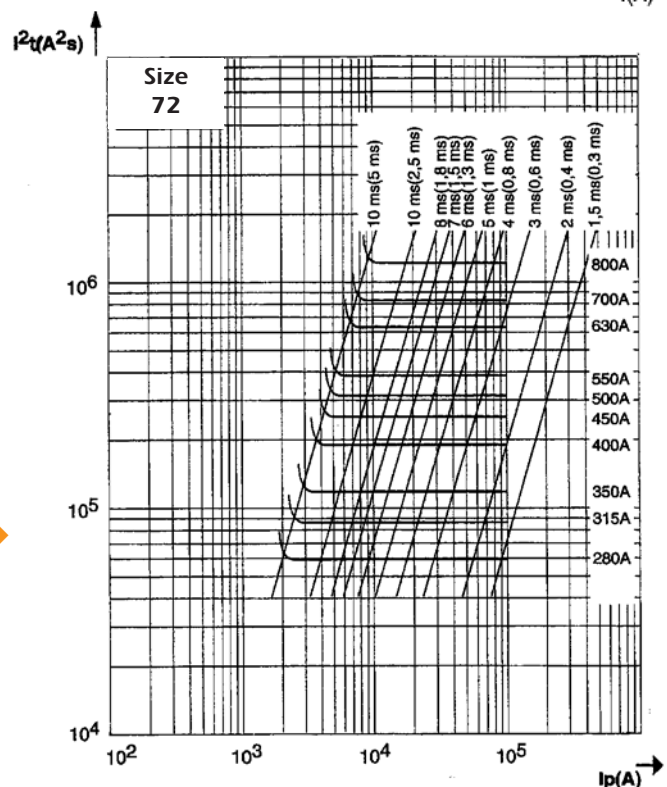


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 73

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

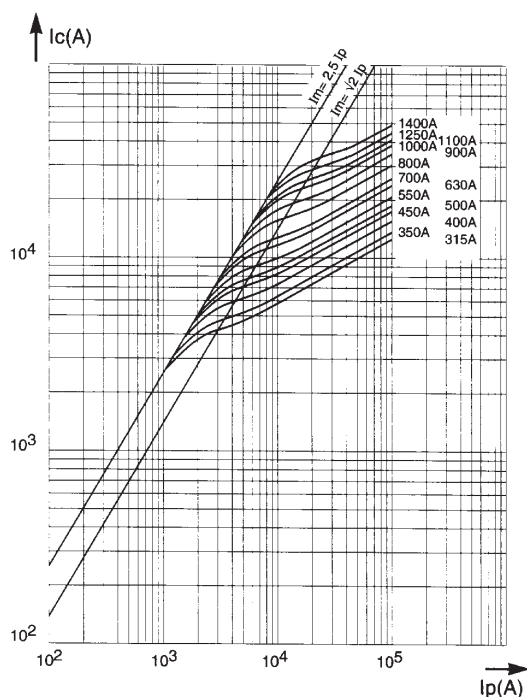

Time-current characteristics

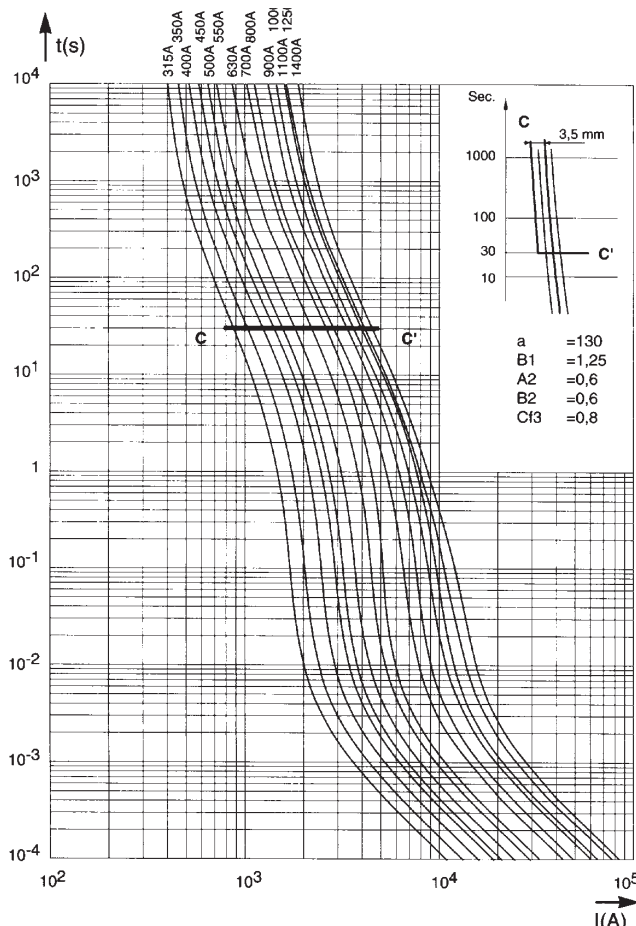

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

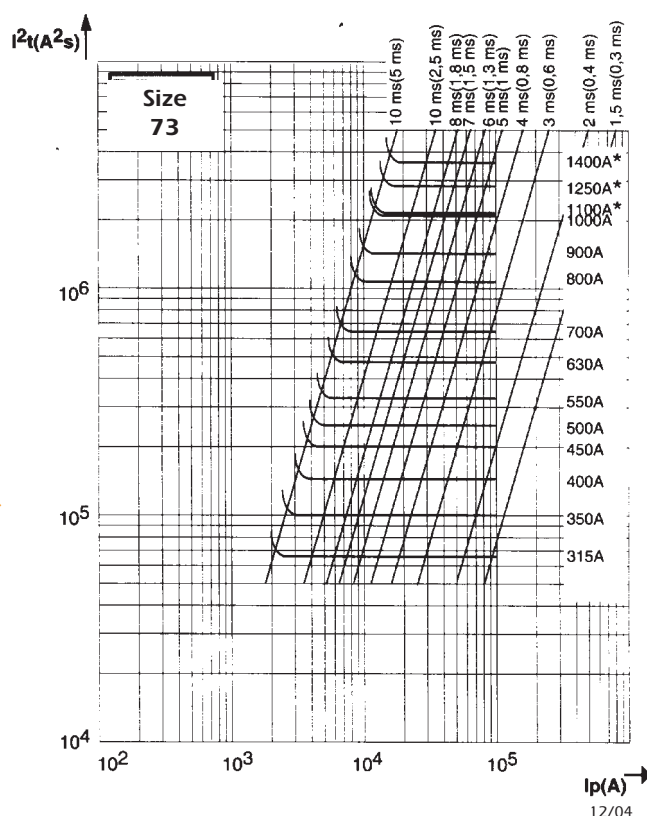




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

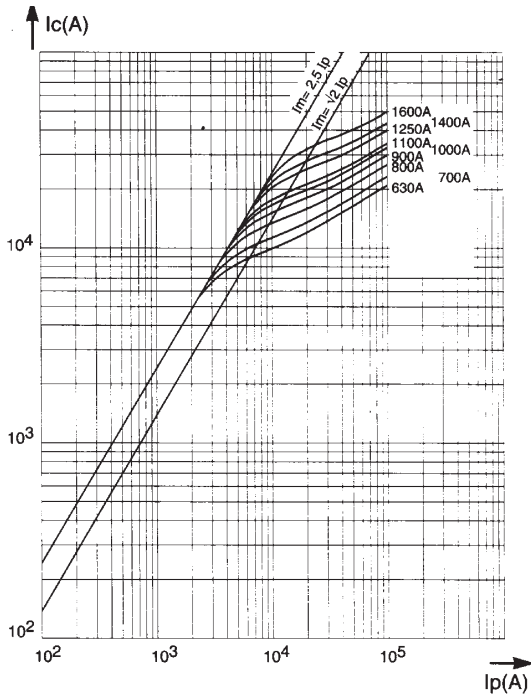

Time-current characteristics

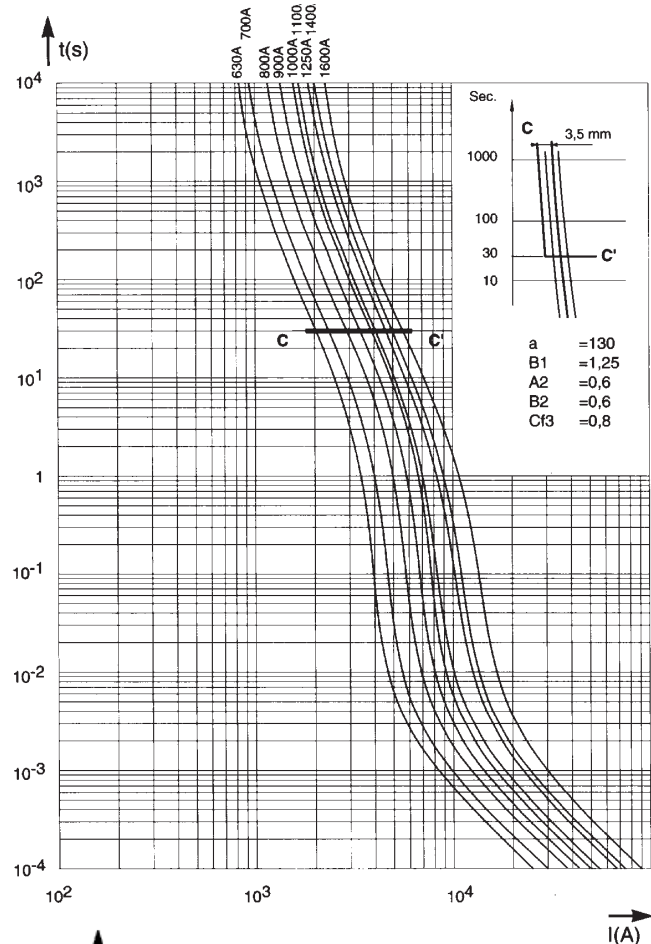

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.


The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

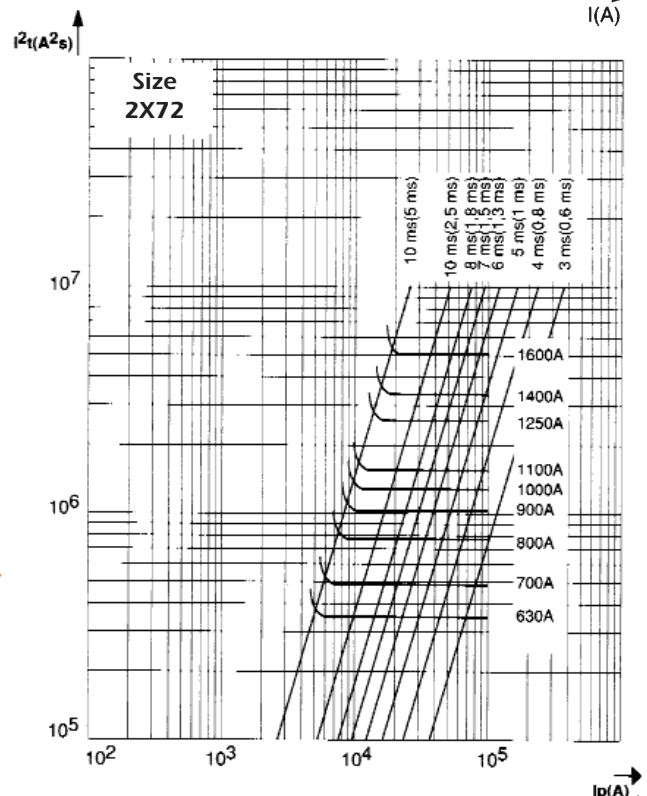

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

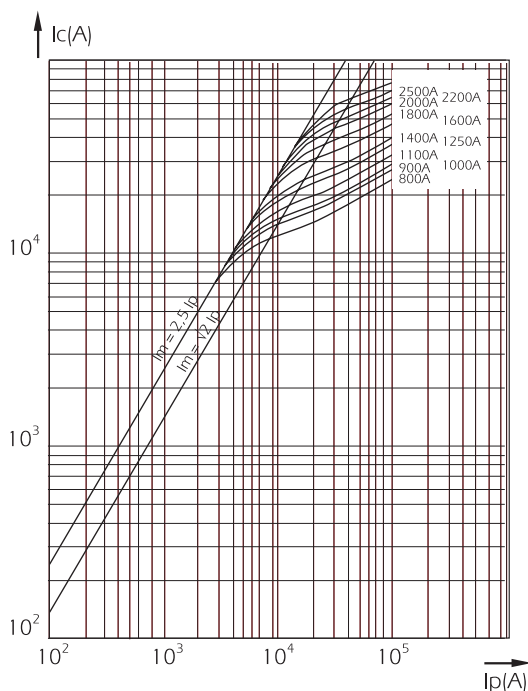

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Size 2x72



Time-current characteristics

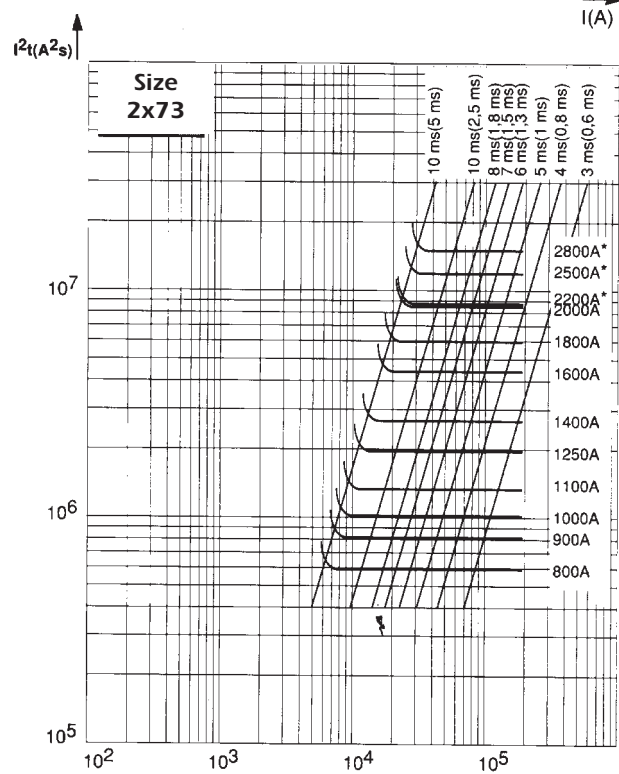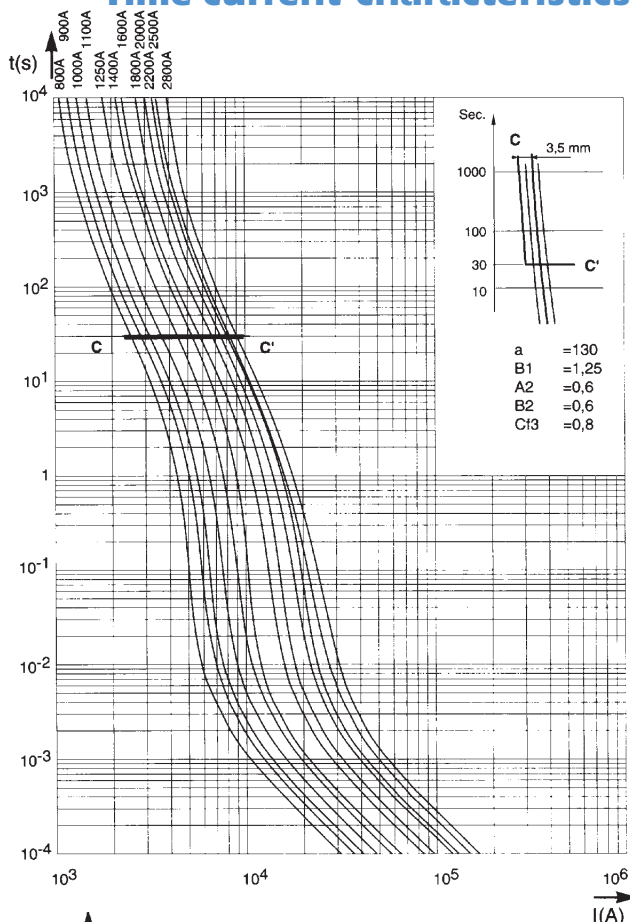



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

DC working voltage possibilities

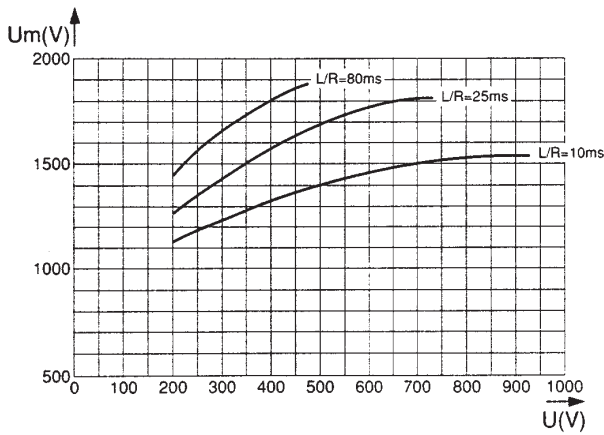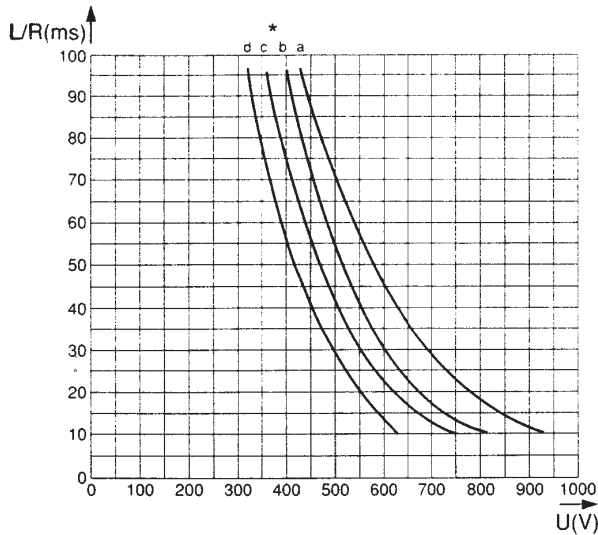

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents in the sizes indicated in the table.

I_{pm} (1) values indicate the minimum breaking current in Amperes (A).

Remark: When the fault current di/dt is very large, this condition can be exceeded. It is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Rated current I_N (A)	Curves (*) and I_{pm} (1) corresponding to the rating											
		70 * I_{pm} (A)	71 * I_{pm} (A)	72 * I_{pm} (A)	73 * I_{pm} (A)	2x72 * I_{pm} (A)	2x73 * I_{pm} (A)					
63	a	270										
80	a	400										
100	a	520										
125	a	700										
160	a	950	a	950								
200	a	1300	a	1300								
250	a	1800	a	1800								
280	b	2200	a	2000	a	1800						
315	b	2600	a	2300	a	2200	a	2000				
350	c	3000	a	2700	a	2600	a	2400				
400			b	3500	a	3200	a	3000				
450			b	4000	a	3800	a	3500				
500			c	4800	a	4600	a	3900				
550			c	5200	b	5000	a	4400				
630			c	6400	b	6200	a	5300	a	4400		
700				c	6800	a	6000	a	5200			
800					c	8000	b	8000	a	6400	a	6000
900							b	9000	a	7600	a	7000
1000							c	11000	a	9200	a	7800
1100							c	12000	b	10000	a	8800
1250							c	13500	b	12400	a	10600
1400							c	15000	c	13600	a	12000
1600								c	16000	b	16000	
1800											b	18000
2000											c	22000
2200											c	24000
2500											d	27000
2800											d	30000

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

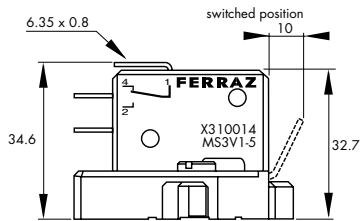


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

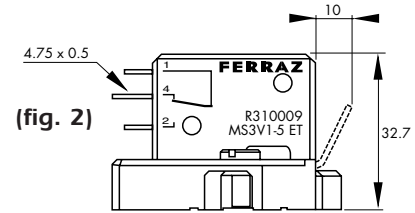


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

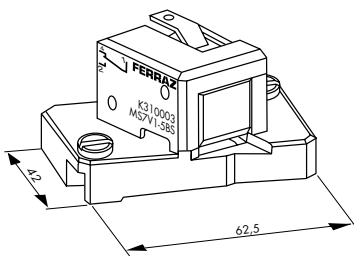

(fig. 5)

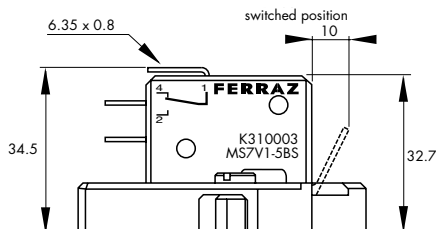


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

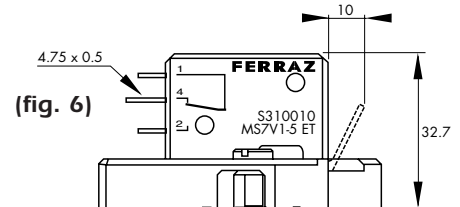

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	Size 2 HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

 Recognized

650 to 1300VAC / 63 to 2800A.

- Exceptionally low I²T, Watt losses.
- Non-magnetic construction, highly reliable low voltage.
- Indicator system.
- Conformity to UL, CSA investigated, IEC, DIN and VDE standards.
- Increased technical performance
- Higher ratings.
- Reduction in volume and weight.
- This fuse preselection table indicates, for each size:
 - rated current (or rating) I_n
 - pre-arcing I²t (I²t_p) at 1 ms
 - total operating I²t (I²t_t) at 1000 V and 850V(I)f=50Hz, cos φ =0.15, and for a total operating time from 8 to 10 ms
 - dissipated power P_n at the rated current I_n, and at 0.8 I_n, in steady state
 - breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.



Estimated breaking capacity: 300 kA

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 1000V (*) @ U _n (kA ² s)	Power (W)		Tested Breaking capacity		
	IEC	UL				End contacts	Blades	IEC	USA	
70	1250	1300	50	0,116	0,7	16	16	100kA @ 1250V	100kA @ 1300V	
			63	0,210	1,2	26	26			
			80	0,470	2,7	27	27			
			100	0,830	4,8	30	30			
			125	1,30	7,5	38	38			
			160	2,55	15	45	45			
	1200	1300	200	4,7	27	54	56	100kA @ 1200V	100kA @ 1300V	
			250	9,6	55	58	61			
			280	14	82	61	64			
			315	20	115	66	72			
			350	28	158	68	75			
			400	39	224	81	90			
1100	1200	450	62	356	82	82	150kA @ 1100V	150kA @ 1200V		
		500	84	483	83	83				
		800	900	550	128	576(*)			83	83
1000	1100	550	128	576(*)	83	83	100kA @ 1000V	100kA @ 900V		
		750	800	630	176	730(*)			91	91
		160	2,6	15	46	46			100kA @ 1250V	100kA @ 1300V
		200	4,7	27	54	54				
		250	8,9	51	61	61				
		280	12	68	68	70				
315	16	92	73	76						
350	22	127	76	80						
71	1250	1300	400	38	220	76	80	100kA @ 1250V	100kA @ 1300V	
			450	47	270	87	95			
			500	68	390	90	X			150kA @ 1300V
			500	68	390	X	100			
			550	84	485	98	112			
			630	125	725	105	X			
	630	125	725	X	120	150kA @ 1100V	150kA @ 1200V			
	700	180	1040	105	105					
	900	950	800	290	1540(*)			116	116	
	800	850	900	446	2010(*)			120	120	
	100kA @ 900V	100kA @ 950V								
	100kA @ 800V	100kA @ 850V								

(¹) at 850 V

(²) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I _{pt} @ 1ms (kA _{2s})	Total I _{pt} @ 1000V (*) @ U _N (kA _{2s})	Power (W)		Tested Breaking capacity Estimated B.C 300 kA					
	IEC	UL				End contacts	Blades	IEC	USA				
72	1250	1300	280	10	60	72	72	100kA @ 1250V	100kA @ 1300V				
			315	15	87	76	76						
			350	21	120	77	77						
			400	32,5	190	80	80						
			450	44	255	87	89						
			500	57	330	94	98						
	550	68	390	110	120								
	630	105	610	113	X								
	1100	1200	630	105	610	X	125	150kA @ 1100V	150kA @ 1200V				
			700	145	815	122	140						
			800	215	1240	125	146						
	1000	1100	700	145	815	X	140	150kA @ 1000V	150kA @ 1100V				
800			215	1240	X	146							
900			312	1800	130	152							
850	900	1000	439	2150(*)	136	136	100kA @ 850V	100kA @ 900V					
73	1250	1300	315	12	68	84	84	100kA @ 1250V	100kA @ 1300V				
			350	17	100	86	86						
			375	19	110								
			400	25	145	93	93						
			450	35,5	205	99	100						
			500	44	255	110	112						
			550	57	330	116	120						
			630	84	485	125	132						
			700	110	640	135	X						
			800	190	1090	136	X						
			1200	1300	700	110	640			X	146	100kA @ 1200V	100kA @ 1300V
					900	250	1090			150	X		
	1100	1200			800	190	1090	X	148	150kA @ 1100V	150kA @ 1200V		
					900	250	1440	X	170	150kA @ 1000V	150kA @ 1100V		
	1000	1100			1000	370	2130	152	168				
					1100	445	2555	168	208				
	950	1000	1100	445	2430(*)	168	X	150kA @ 950V	150kA @ 1000V				
	900	1000	1000	370	1920(*)	X	174	150kA @ 900V	150kA @ 1000V				
			1100	445	2280(*)	X	208						
			1250	585	3080(*)	186	X						
			1400	755	4100(*)	210	X						
	850	900	1400	755	3700(*)	210	X	150kA @ 850V	150kA @ 900V				
	690	700	1500	1180	4750(*)	200	X	180kA @ 690V	180kA @ 700V				
	600	650	1600	1430	5740(*)	203	X	120kA @ 600V	120kA @ 650V				
1800			2040	7150(*)	206	X							
2 x 72	1250		630	60	348	160		100kA @ 1250V					
			700	84	480	162							
			800	130	760	168							
			900	176	1020	183							
			1000	228	1320	197							
			1100	272	1560	231							
	1100			1250	426	2440	237		100kA @ 1100V				
				1400	568	3260	256						
				1600	860	4895	262		100kA @ 1000V				
				1800	1250	6350(*)	275		100kA @ 900V				
				2000	1760	7570(*)	285		100kA @ 750V				
				2200	2410	8350(*)	320		100kA @ 650V				
2 x 73	1250		800	100	580	195		100kA @ 1250V					
			900	142	820	208							
			1000	176	1000	231							
			1100	228	1300	244							
			1250	336	1900	262							
			1400	440	2600	283							
	1100			1600	760	4400	286		100kA @ 1100V				
				1800	1000	5800	315						
				2000	1480	8500	319		120kA @ 1000V				
				2200	1780	9632(*)	353		100kA @ 950V				
				2500	2340	12075(*)	390		110kA @ 900V				
				2800	3000	15000(*)	440		100kA @ 850V				
600		3000	4980	15700(*)	405		200kA @ 600V						
		3200	5720	19030(*)	426								
		3600	8160	25200(*)	430		200kA @ 550V						



(1) at 850 V

(2) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC American Terminals - 70 - 73 Blades

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
70	A 130 URD 70 LI 0050	-	380	3	-
	A 130 URD 70 LI 0063	W300652			A130UD70LI063
	A 130 URD 70 LI 0080	X300653			A130UD70LI080
	A 130 URD 70 LI 0100	Y300654			A130UD70LI100
	A 130 URD 70 LI 0125	Z300655			A130UD70LI125
	A 130 URD 70 LI 0160	A300656			A130UD70LI160
	A 130 URD 70 LI 0200	B300657			A130UD70LI200
	A 130 URD 70 LI 0250	C300658			A130UD70LI250
	A 130 URD 70 LI 0280	Q300716			A130UD70LI280
	A 130 URD 70 LI 0315	D300659			A130UD70LI315
A 120 URD 70 LI 0350	E300660	A120UD70LI350			
71	A 130 URD 71 LLI0160	E300752	630	3	A130UD71LI160
	A 130 URD 71 LLI0200	F300661			A130UD71LI200
	A 130 URD 71 LLI0250	G300662			A130UD71LI250
	A 130 URD 71 LLI0280	R300717			A130UD71LI280
	A 130 URD 71 LLI0315	H300663			A130UD71LI315
	A 130 URD 71 LLI0350	J300664			A130UD71LI350
	A 130 URD 71 LLI0400	K300665			A130UD71LI400
	A 130 URD 71 LLI0450	L300666			A130UD71LI450
	A 120 URD 71 LLI0500	M300667			A120UD71LI500
	A 120 URD 71 LLI0550	N300668			A120UD71LI550
72	A 110 URD 71 LLI0630	P300669	860	3	A110UD71LI630
	A 130 URD 72 LI 0280	Q300670			A130UD72LI280
	A 130 URD 72 LI 0315	R300671			A130UD72LI315
	A 130 URD 72 LI 0350	S300672			A130UD72LI350
	A 130 URD 72 LI 0400	T300673			A130UD72LI400
	A 130 URD 72 LI 0450	V300674			A130UD72LI450
	A 130 URD 72 LI 0500	W300675			A120UD72LI500
	A 130 URD 72 LI 0550	X300676			A130UD72LI550
	A 120 URD 72 LI 0630	Y300677			A120UD72LI630
	A 110 URD 72 LI 0700	Z300678			A110UD72LI700
73	A 110 URD 72 LI 0800	A300679	1250	1-3	A110UD72LI800
	A 130 URD 73 LI 0315	B300680			A130UD73LI315
	A 130 URD 73 LI 0350	C300681			A130UD73LI350
	A 130 URD 73 LI 0400	D300682			A130UD73LI400
	A 130 URD 73 LI 0450	E300683			A130UD73LI450
	A 130 URD 73 LI 0500	F300684			A120UD73LI500
	A 130 URD 73 LI 0550	G300685			A130UD73LI550
	A 130 URD 73 LI 0630	H300686			A130UD73LI630
	A 130 URD 73 LI 0700	J300687			A130UD73LI700
	A 120 URD 73 LI 0800	K300688			A120UD73LI800
A 110 URD 73 LI 0900	L300689	A110UD73LI900			
A 100 URD 73 LI 1000	M300690	A100UD73LI1000			
A 100 URD 73 LI 1100	N300691	A100UD73LI1100			
A 100 URD 73 LI 1250	J301193	A100UD73LI1250			
A 90 URD 73 LI 1400	K301194	A90UD73LI1400			

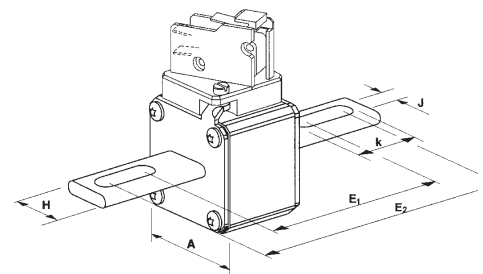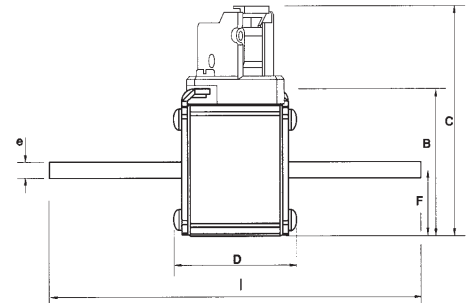

Rated voltage 900 V to 1300 V as per American standard.

Microswitches supplied separately


Size	A	B	C	D	E1±1,3	E2±1,3	F	H	J	k	I±1,5	e
70	40	46,5	82	71	91,4	130,4	21	25	10,5	30	152,4	6
	1-9/16"	1-27/32"	3-7/32"	2-5/32"	3-13/32"	5-1/8"	53/64"	1"	13/32"	1-3/16"	6"	15/64"
71	51	56,5	91	71	91,4	130,4	25,5	25	10,5	30	152,4	6
	2"	2-7/32"	3-37/64"	2-25/32"	3-19/32"	5-1/8"	1"	1"	13/32"	1-3/16"	6"	15/64"
72	60	65,5	100	71	97,6	132,4	30	32	14,6	32	157,4	6
	2-23/64"	2-37/64"	3-15/16"	2-25/32"	3-23/32"	5-13/64"	1-3/16"	1-1/4"	9/16"	1-1/4"	6-3/16"	15/64"
73	74,5	79,5	114	72	98,8	131,4	37,2	40	15,9	32	157,4	6
	2-15/16"	3-1/8"	4-1/2"	2-53/64" (2-15/16")	3-57/64"	5-11/64"	1-15/32"	1-9/16"	5/8"	1-1/4"	6-3/16"	15/64"

Note:

Dimensions in mm
Dimensions in inches

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Multiplier coefficient

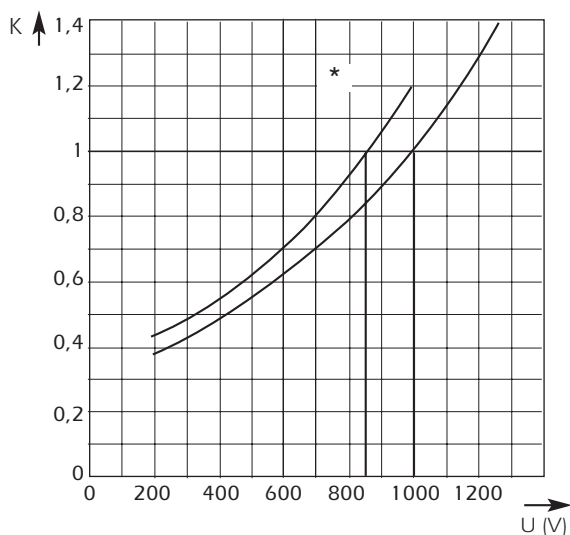

Left: Mean curve indicating variation of total I^2t (I^2t_t) and total operating time T_t in accordance with working voltage U .


Example:
Fuse 350 A in size 70.
 $I_p = 10\,000\text{ A}$ $U = 1100\text{ V}$

At 1000 V
 $I^2t_t = 115\,000\text{ A}^2\text{s}$ $T_t = 7\text{ ms}$

At 1100 V
 $I^2t_t = 115\,000 \times 1.13 = 130\,000\text{ A}^2\text{s}$
 $T_t = 7 \times 1.13 = 7.9\text{ ms}$


* curve for fuses with I^2t published at 850VAC

Dissipated power

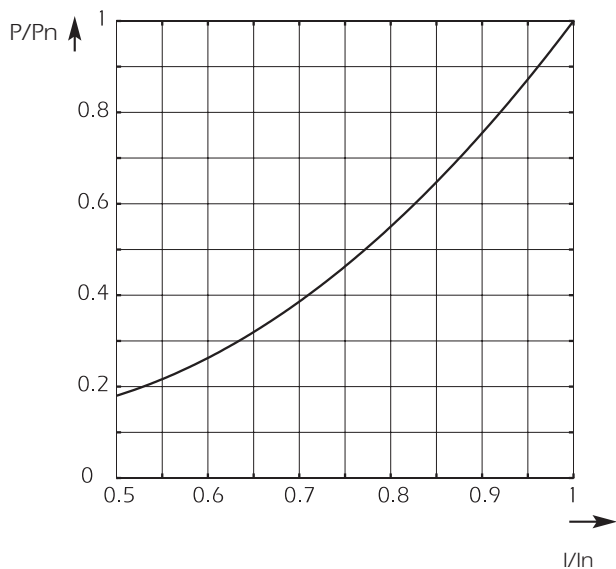

Above left: Curve enabling calculation of dissipated power P by a fuse rated I_{Nr} as a function of the RMS current I , in multiples of I_{Nr} , in steady state.

Arc voltage

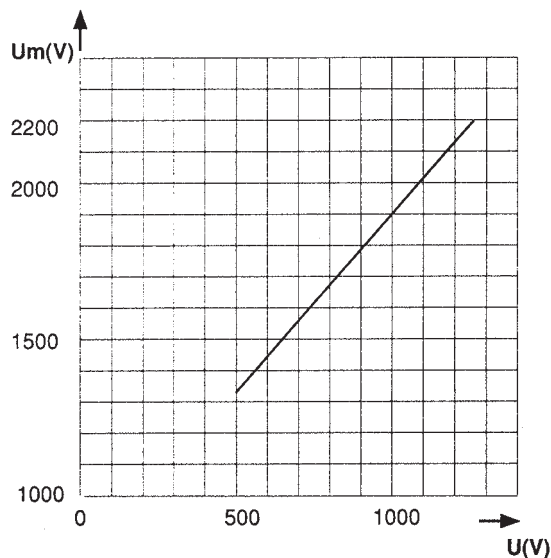

Above right: Curve indicating peak arc voltage U_m which may appear across fuse terminals as a function of working voltage U at $\cos \varphi = 0.15$




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 70

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

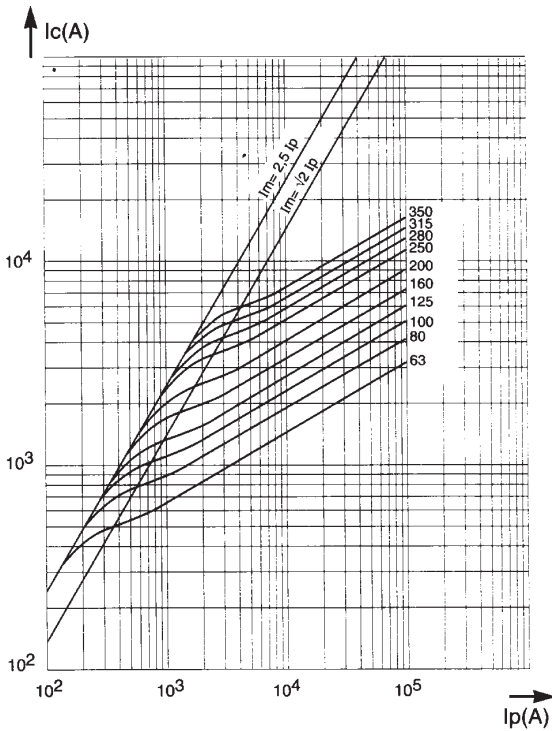

Time-current characteristics

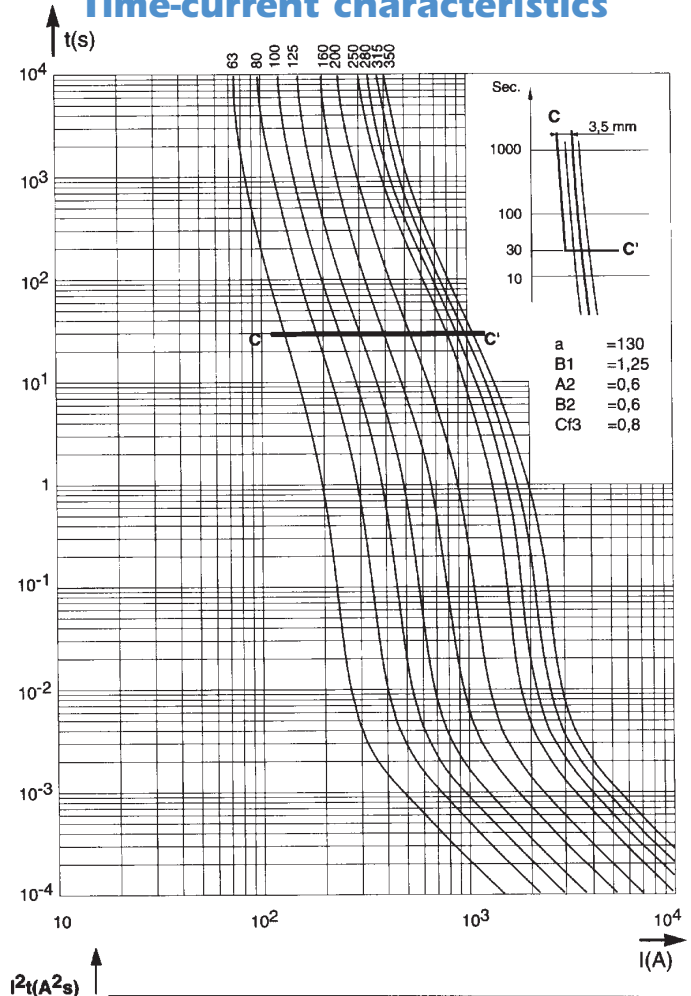


Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I_p .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times


Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

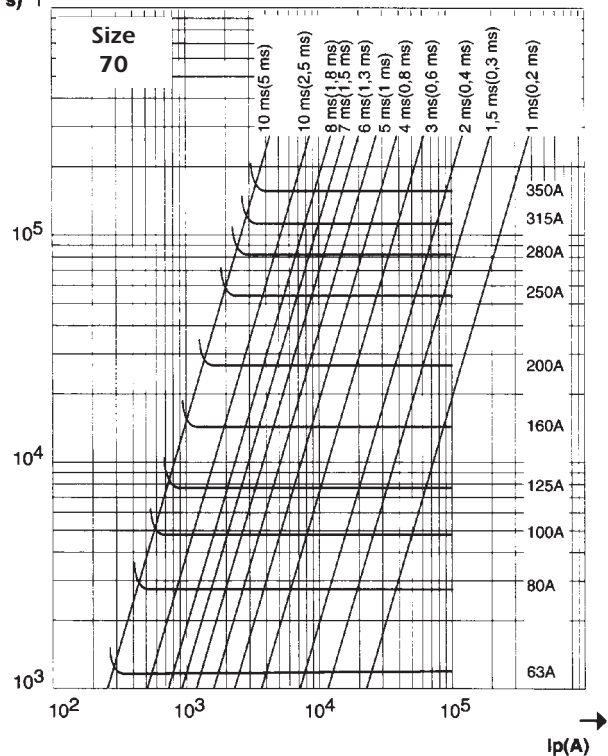

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

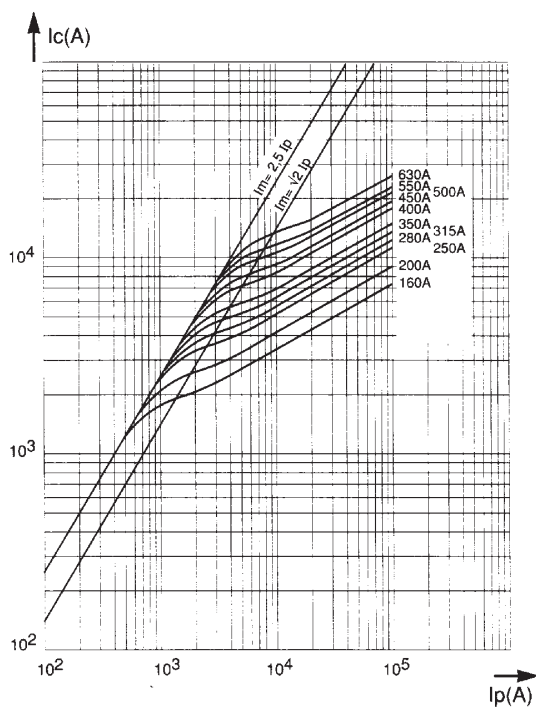

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .



- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

Size 71

Time-current characteristics

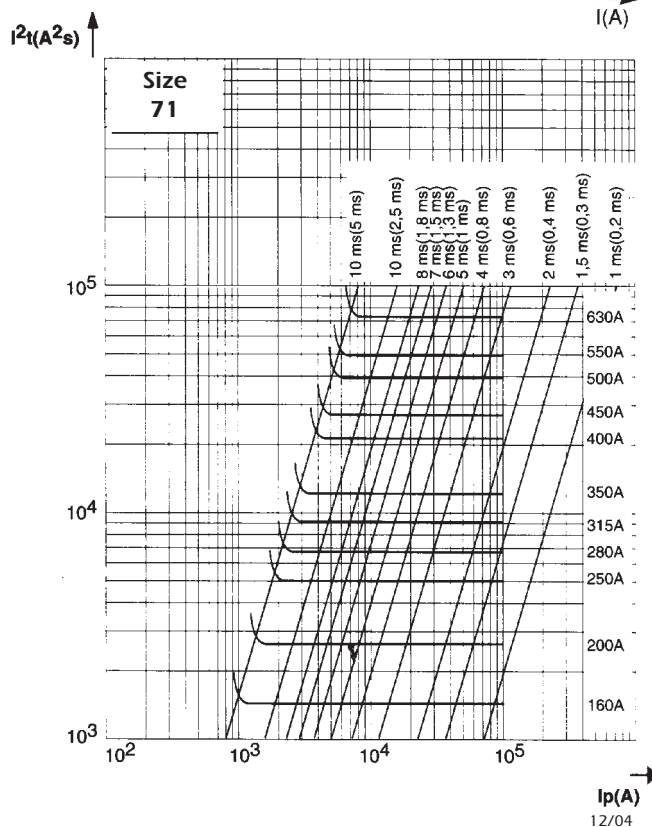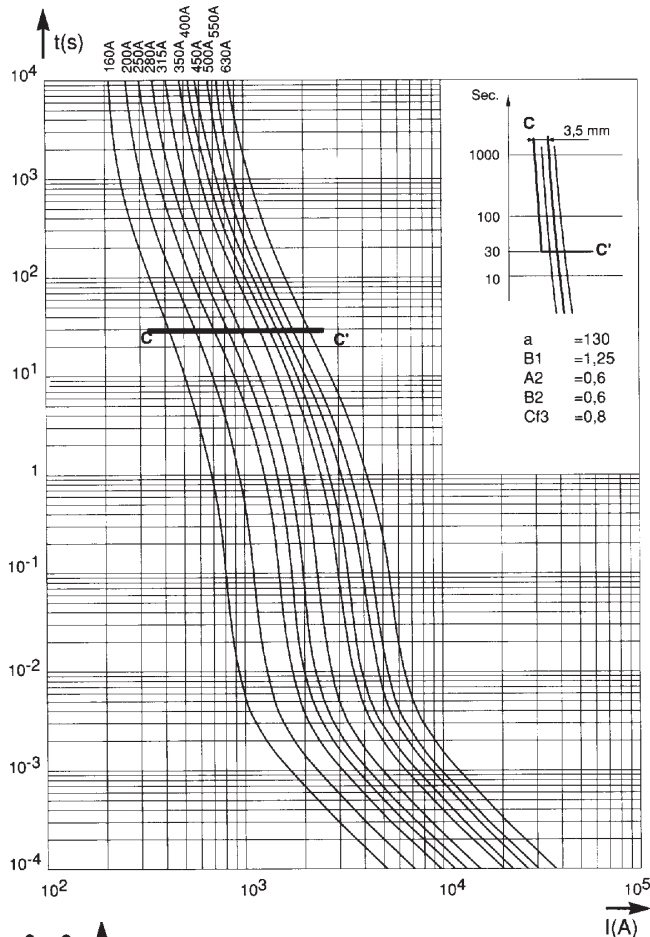




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 72

Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

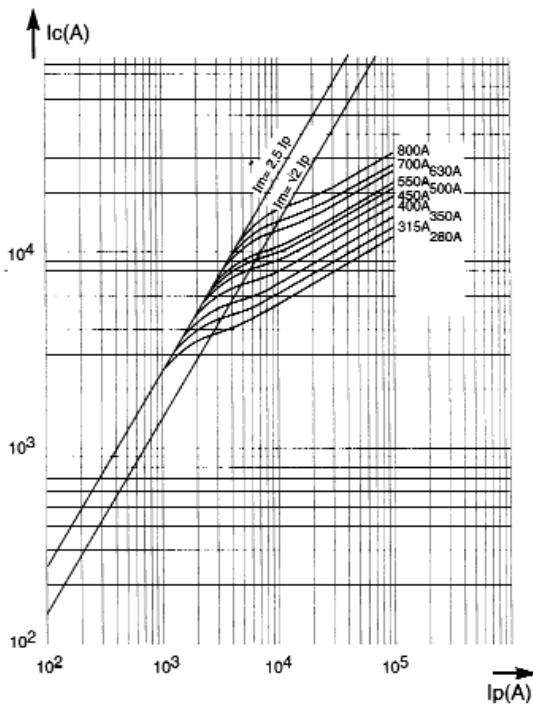

Time-current characteristics

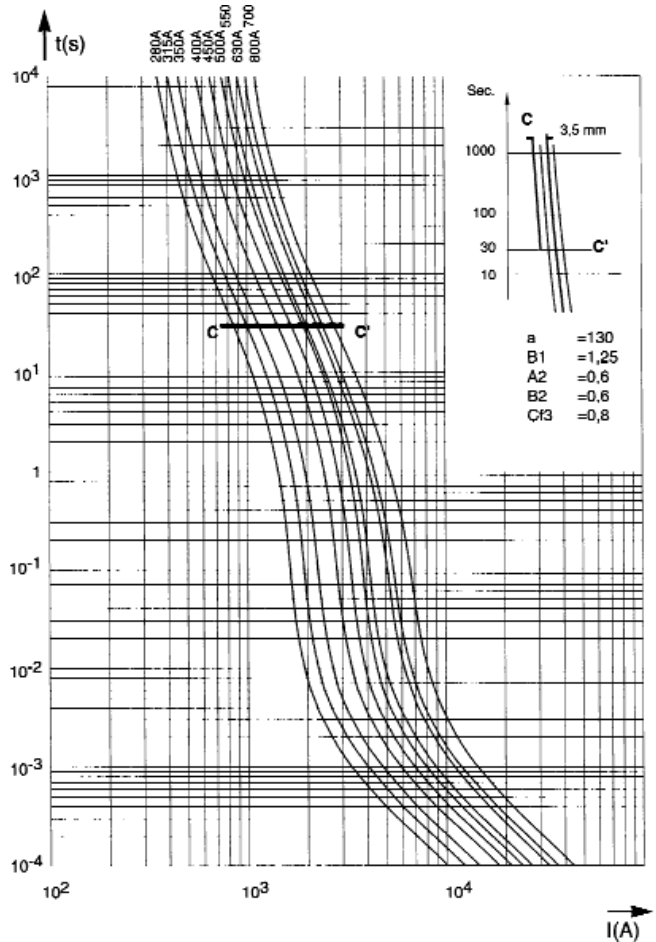

Time-current characteristics


Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8 \%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

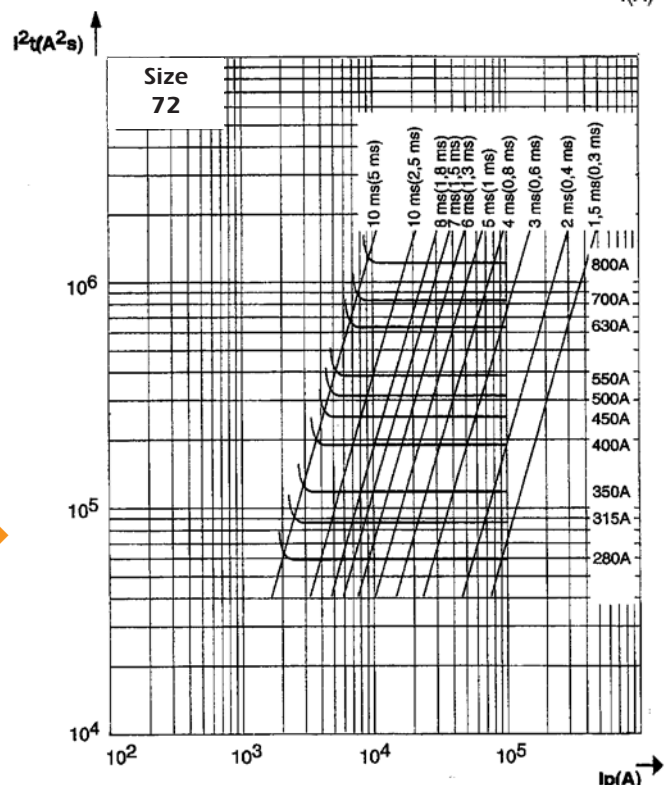


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 73

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

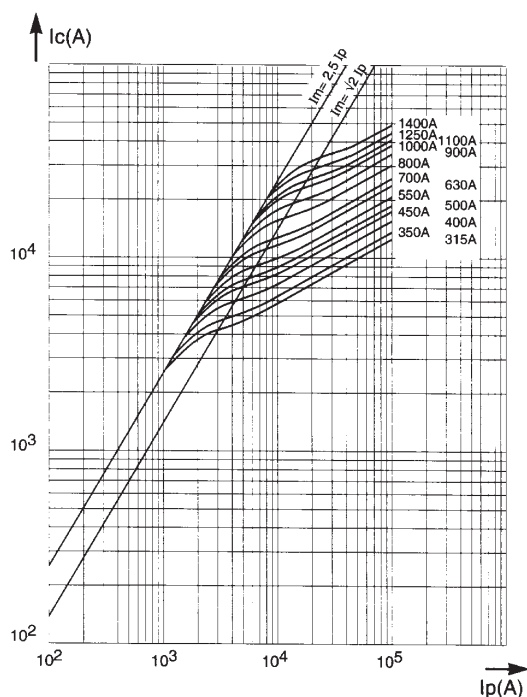

Time-current characteristics

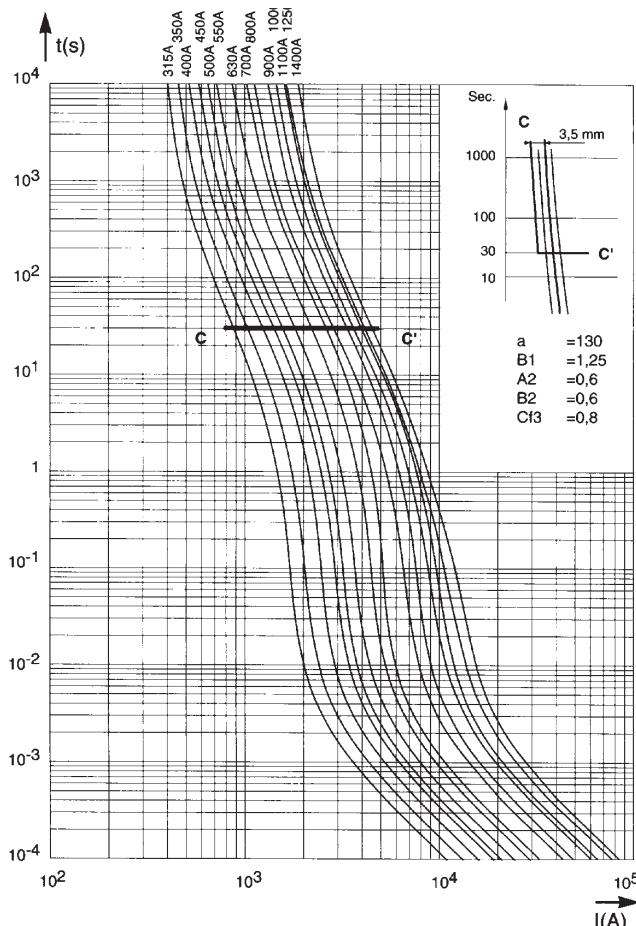

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

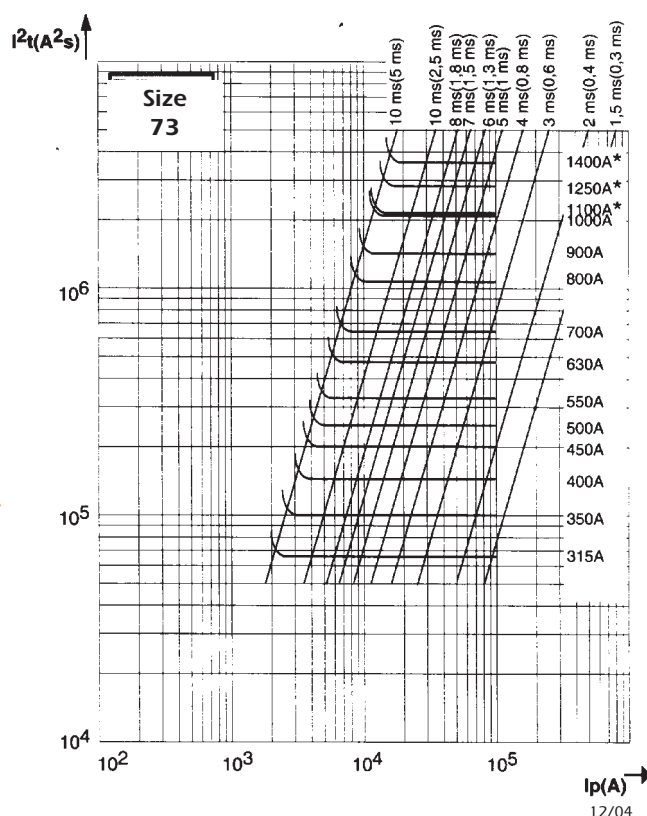

Semiconductor (AC) fuses




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

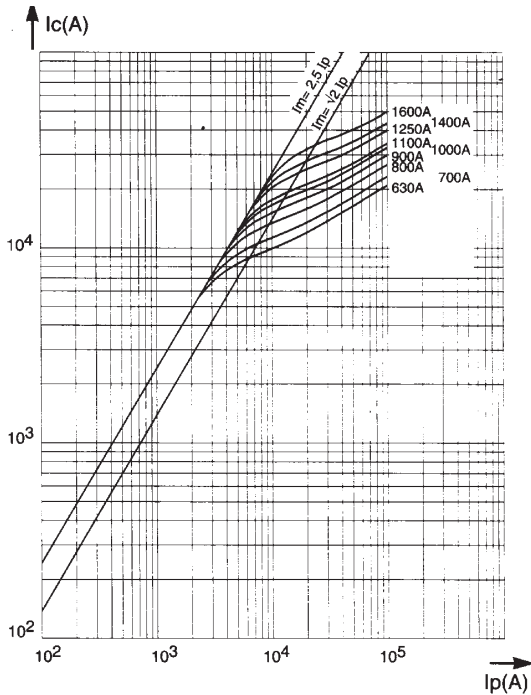

Time-current characteristics

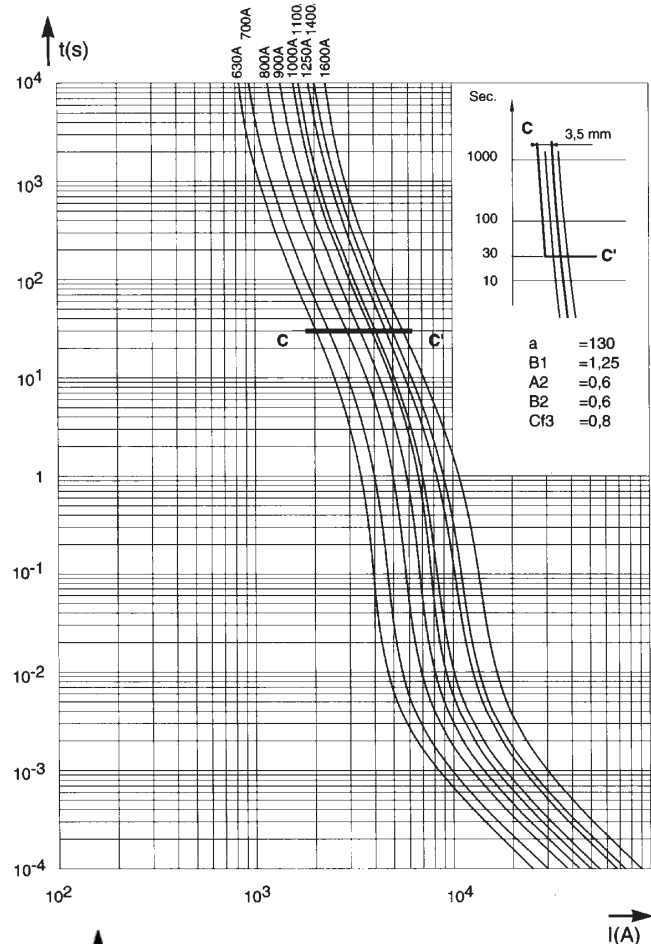

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.


The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

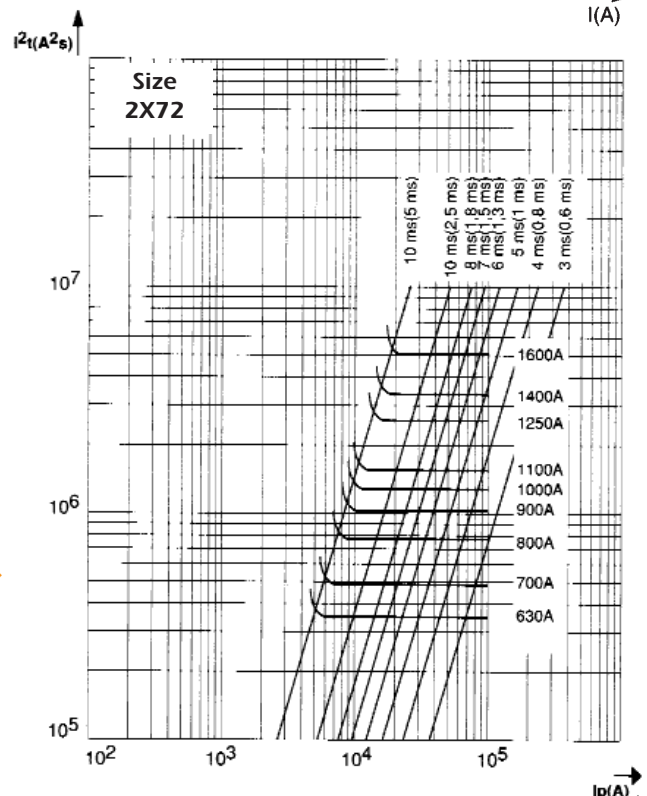

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

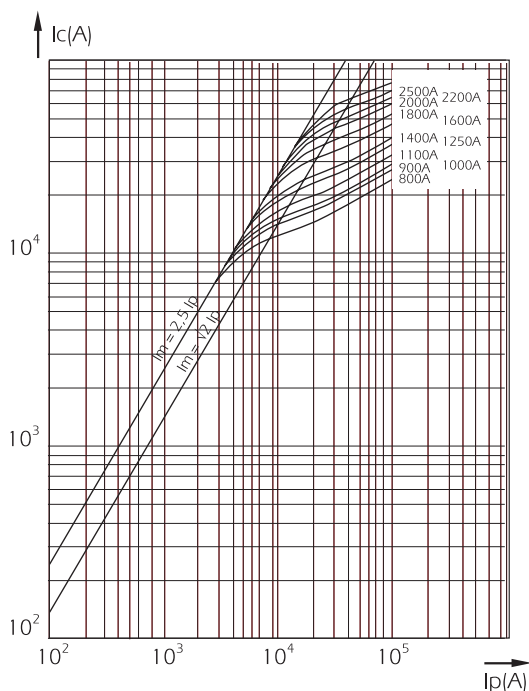

Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Size 2x72



Time-current characteristics

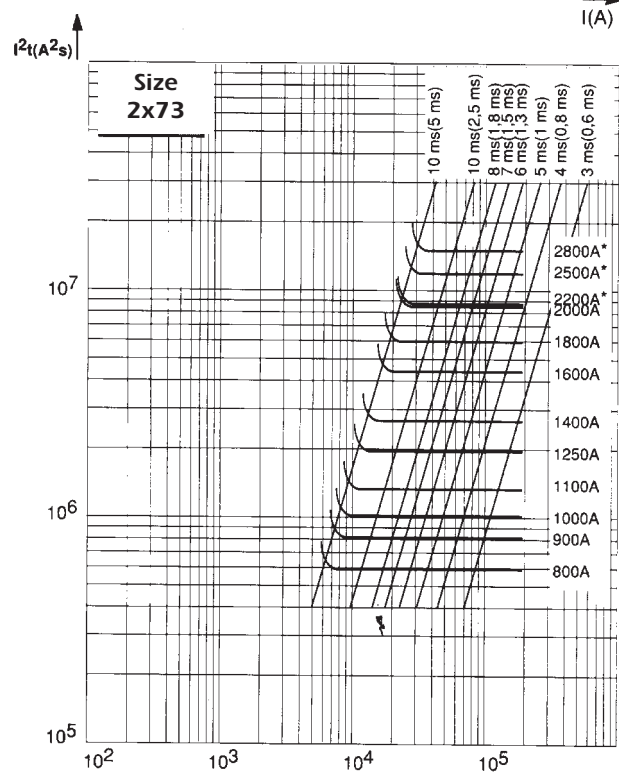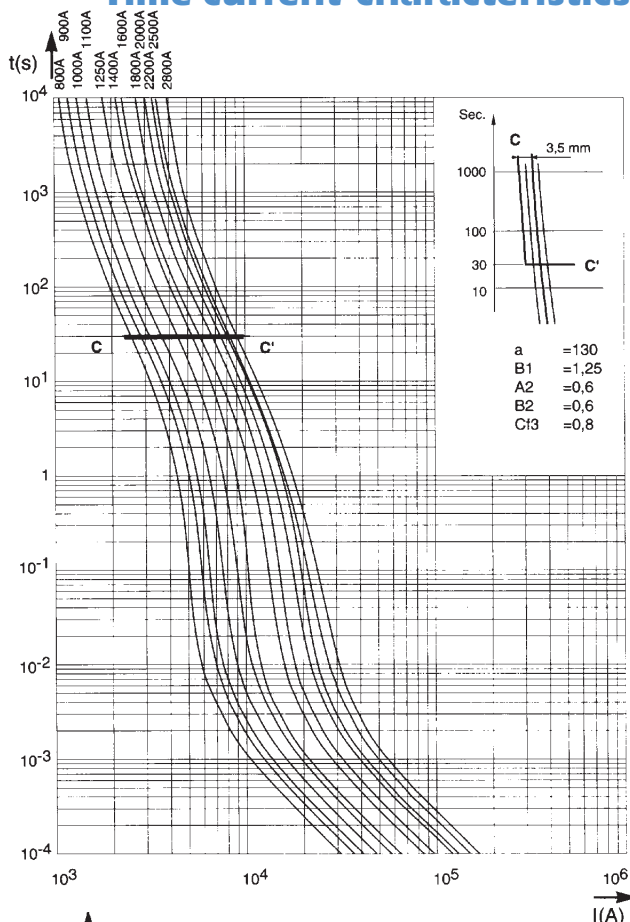



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

DC working voltage possibilities

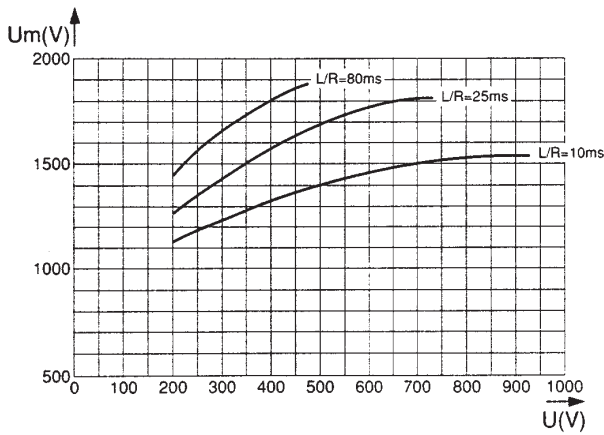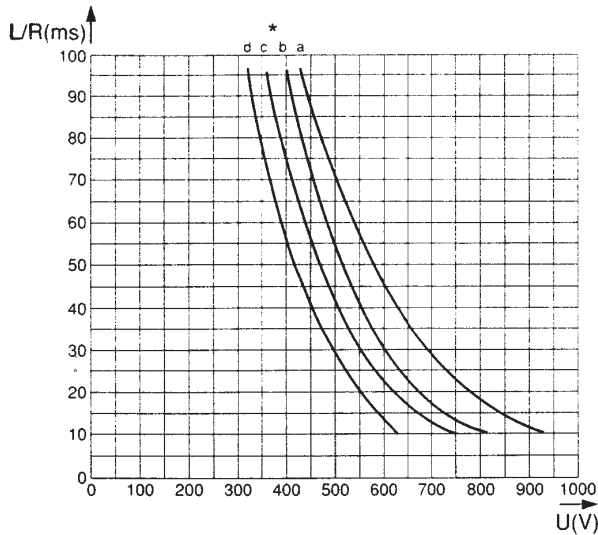

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents in the sizes indicated in the table.

I_{pm} (1) values indicate the minimum breaking current in Amperes (A).

Remark: When the fault current di/dt is very large, this condition can be exceeded. It is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Rated current I_N (A)	Curves (*) and I_{pm} (1) corresponding to the rating											
		70 * I_{pm} (A)	71 * I_{pm} (A)	72 * I_{pm} (A)	73 * I_{pm} (A)	2x72 * I_{pm} (A)	2x73 * I_{pm} (A)					
63	a	270										
80	a	400										
100	a	520										
125	a	700										
160	a	950	a	950								
200	a	1300	a	1300								
250	a	1800	a	1800								
280	b	2200	a	2000	a	1800						
315	b	2600	a	2300	a	2200	a	2000				
350	c	3000	a	2700	a	2600	a	2400				
400			b	3500	a	3200	a	3000				
450			b	4000	a	3800	a	3500				
500			c	4800	a	4600	a	3900				
550			c	5200	b	5000	a	4400				
630			c	6400	b	6200	a	5300	a	4400		
700				c	6800	a	6000	a	5200			
800					c	8000	b	8000	a	6400	a	6000
900							b	9000	a	7600	a	7000
1000							c	11000	a	9200	a	7800
1100							c	12000	b	10000	a	8800
1250							c	13500	b	12400	a	10600
1400							c	15000	c	13600	a	12000
1600								c	16000	b	16000	
1800											b	18000
2000											c	22000
2200											c	24000
2500											d	27000
2800											d	30000

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:
- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273 except plain blades
- PSC LR sizes 33, 233, 73, 273
- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE
- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A	12 kV	20 kV	
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A	12 kV	20 kV	
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A	12 kV	20 kV	
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

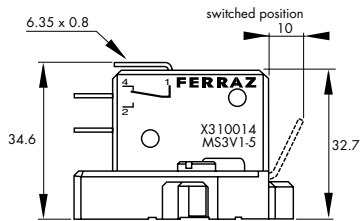


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1
but with 2 microswitches side by side


(9) Watertightness class

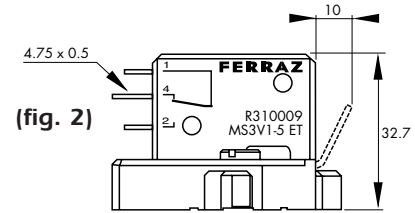


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

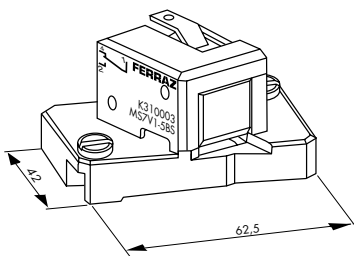

(fig. 5)

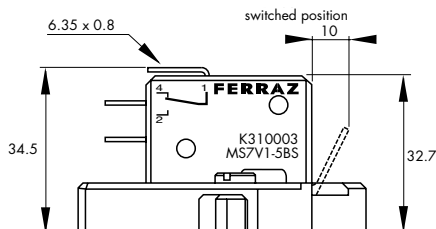


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

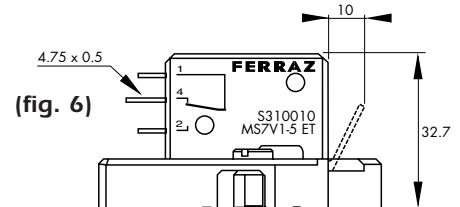

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

 Recognized

650 to 1300VAC / 63 to 2800A.

- Exceptionally low I²T, Watt losses.
- Non-magnetic construction, highly reliable low voltage.
- Indicator system.
- Conformity to UL, CSA investigated, IEC, DIN and VDE standards.
- Increased technical performance
- Higher ratings.
- Reduction in volume and weight.
- This fuse preselection table indicates, for each size:
 - rated current (or rating) I_n
 - pre-arcing I²t (I²t_p) at 1 ms
 - total operating I²t (I²t_t) at 1000 V and 850V(I)f=50Hz, cos φ =0.15, and for a total operating time from 8 to 10 ms
 - dissipated power P_n at the rated current I_n, and at 0.8 I_n, in steady state
 - breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.



Estimated breaking capacity: 300 kA

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 1000V (*) @ U _n (kA ² s)	Power (W)		Tested Breaking capacity							
	IEC	UL				End contacts	Blades	IEC	USA						
70	1250	1300	50	0,116	0,7	16	16	100kA @ 1250V	100kA @ 1300V						
			63	0,210	1,2	26	26								
			80	0,470	2,7	27	27								
			100	0,830	4,8	30	30								
			125	1,30	7,5	38	38								
			160	2,55	15	45	45								
	1200	1300	200	4,7	27	54	56	100kA @ 1200V	100kA @ 1300V						
			250	9,6	55	58	61								
			280	14	82	61	64								
			315	20	115	66	72								
			350	28	158	68	75								
			400	39	224	81	90								
1100	1200	450	62	356	82	82	150kA @ 1100V	150kA @ 1200V							
		500	84	483	83	83									
		800	900	550	128	576(*)			83	83	120kA @ 1000V	120kA @ 1100V			
		750	800	630	176	730(*)			91	91	100kA @ 800V	100kA @ 900V			
71	1250	1300	630	176	730(*)	91	91	100kA @ 1250V	100kA @ 1300V						
			160	2,6	15	46	46								
			200	4,7	27	54	54								
			250	8,9	51	61	61								
			280	12	68	68	70								
			315	16	92	73	76								
			350	22	127	76	80								
			400	38	220	76	80								
			450	47	270	87	95								
	1100	1300 (TTI)	1300	500	68	390	90	X	150kA @ 1100V	150kA @ 1200V					
				500	68	390	X	100							
				550	84	485	98	112							
		1100	1200	1200	630	125	725	105	X	150kA @ 1100V	150kA @ 1200V				
					630	125	725	X	120						
					700	180	1040	105	105						
					900	950	800	290	1540(*)			116	116	100kA @ 800V	100kA @ 850V
					800	850	900	446	2010(*)			120	120	100kA @ 900V	100kA @ 950V
					800	850	900	446	2010(*)			120	120	100kA @ 800V	100kA @ 850V

(¹) at 850 V

(²) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

PSC 650 to 1300VAC US and European standard



Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I _t @ 1ms (kA _{2s})	Total I ² t @ 1000V (*) @ U _N (kA _{2s})	Power (W)		Tested Breaking capacity Estimated B.C 300 kA	
	IEC	UL				End contacts	Blades	IEC	USA
72	1250	1300	280	10	60	72	72	100kA @ 1250V	100kA @ 1300V
			315	15	87	76	76		
			350	21	120	77	77		
			400	32,5	190	80	80		
			450	44	255	87	89		
			500	57	330	94	98		
	550	68	390	110	120				
	630	105	610	113	X				
	1100	1200	630	105	610	X	125	150kA @ 1100V	150kA @ 1200V
			700	145	815	122	140		
			800	215	1240	125	146		
	1000	1100	700	145	815	X	140	150kA @ 1000V	150kA @ 1100V
800			215	1240	X	146			
900			312	1800	130	152			
850	900	1000	439	2150(*)	136	136	100kA @ 850V	100kA @ 900V	
73	1250	1300	315	12	68	84	84	100kA @ 1250V	100kA @ 1300V
			350	17	100	86	86		
			375	19	110				
			400	25	145	93	93		
			450	35,5	205	99	100		
			500	44	255	110	112		
			550	57	330	116	120		
			630	84	485	125	132		
			700	110	640	135	X		
			800	190	1090	136	X		
	1200	1300	700	110	640	X	146	100kA @ 1200V	100kA @ 1300V
			900	250	1090	150	X		
			800	190	1090	X	148	150kA @ 1100V	150kA @ 1200V
	1100	1200	900	250	1440	X	170	150kA @ 1000V	150kA @ 1100V
			1000	370	2130	152	168		
	1000	1100	1100	445	2555	168	208		
			950	445	2430(*)	168	X	150kA @ 950V	150kA @ 1000V
	900	1000	1000	370	1920(*)	X	174	150kA @ 900V	150kA @ 1000V
			1100	445	2280(*)	X	208		
			1250	585	3080(*)	186	X		
	1400	1000	1400	755	4100(*)	210	X		
850			755	3700(*)	210	X	150kA @ 850V	150kA @ 900V	
690	700	1500	1180	4750(*)	200	X	180kA @ 690V	180kA @ 700V	
		1600	1430	5740(*)	203	X			
600	650	1800	2040	7150(*)	206	X	120kA @ 600V	120kA @ 650V	
2 x 72	1250	1300	630	60	348	160		100kA @ 1250V	
			700	84	480	162			
			800	130	760	168			
			900	176	1020	183			
			1000	228	1320	197			
			1100	272	1560	231			
	1100	1200	1250	426	2440	237		100kA @ 1100V	
			1400	568	3260	256			
			1600	860	4895	262		100kA @ 1000V	
	1000	1100	1800	1250	6350(*)	275		100kA @ 900V	
			750	2000	7570(*)	285		100kA @ 750V	
	650	700	2200	2410	8350(*)	320		100kA @ 650V	
			2500	3470	12000(*)	340			
			800	100	580	195			
	2 x 73	1250	1300	900	142	820	208		100kA @ 1250V
1000				176	1000	231			
1100				228	1300	244			
1250				336	1900	262			
1400				440	2600	283			
1100		1200	1600	760	4400	286		100kA @ 1100V	
			1800	1000	5800	315			
			2000	1480	8500	319		120kA @ 1000V	
1000		1100	2200	1780	9632(*)	353		100kA @ 950V	
			900	2500	12075(*)	390		110kA @ 900V	
950		1000	2800	3000	15000(*)	440		100kA @ 850V	
			3000	4980	15700(*)	405			
600		650	3200	5720	19030(*)	426		200kA @ 600V	
			3600	8160	25200(*)	430		200kA @ 550V	

(1) at 850 V

(2) does not exist with blades

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC IEC Terminals - French 70 - 73 End contacts

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number			
70	12,5 URD 70 TT F 0050	C301095	350	3	PC70UD13C50TF			
	12,5 URD 70 TT F 0063	M300483			PC70UD13C63TF			
	12,5 URD 70 TT F 0080	N300484			PC70UD13C80TF			
	12,5 URD 70 TT F 0100	P300485			PC70UD13C100TF			
	12,5 URD 70 TT F 0125	Q300486			PC70UD13C125TF			
	12,5 URD 70 TT F 0160	R300487			PC70UD13C160TF			
	12,5 URD 70 TT F 0200	S300488			PC70UD13C200TF			
	12,5 URD 70 TT F 0250	T300489			PC70UD13C250TF			
	12 URD 70 TT F 0280	N300714			PC70UD12C280TF			
	12 URD 70 TT F 0315	V300490			PC70UD12C315TF			
	11 URD 70 TT F 0350	W300491			PC70UD11C350TF			
	11 URD 70 TT F 0400	E300867			PC70UD11C400TF			
	11 URD 70 TT F 0450	H301284			PC70UD11C450TF			
	10 URD 70 TT F 0500	J301285			PC70UD11C500TF			
	8 URD 70 TT F 0550	K301286			PC70UD80V550TF			
	71	12,5 URD 71 TT F 0160			B300749	520	3	PC71UD13C160TF
12,5 URD 71 TT F 0200		Z300517	PC71UD13C200TF					
12,5 URD 71 TT F 0250		A300518	PC71UD13C250TF					
12,5 URD 71 TT F 0280		P300715	PC71UD13C280TF					
12,5 URD 71 TT F 0315		B300519	PC71UD13C315TF					
12,5 URD 71 TT F 0350		C300520	PC71UD13C350TF					
12,5 URD 71 TT F 0400		D300521	PC71UD13C400TF					
12,5 URD 71 TT F 0450		E300522	PC71UD13C450TF					
11 URD 71 TT F 0500		F300523	PC71UD11C500TF					
11 URD 71 TT F 0550		G300524	PC71UD11C550TF					
11 URD 71 TT F 0630		H300525	PC71UD11C630TF					
10 URD 71 TT F 0700		M301288	PC71UD10C700TF					
9 URD 71 TT F 0800		Z300862	PC71UD90V800TF					
8 URD 71 TT F 0900		N301289	PC71UD80VC900TF					
72		12,5 URD 72 TT F 0250	X301573	800	3			PC72UD13C250TF
		12,5 URD 72 TT F 0280	Y300493					PC72UD13C280TF
	12,5 URD 72 TT F 0315	Z300494	PC72UD13C315TF					
	12,5 URD 72 TT F 0350	A300495	PC72UD13C350TF					
	12,5 URD 72 TT F 0400	B300496	PC72UD13C400TF					
	12,5 URD 72 TT F 0450	C300497	PC72UD13C450TF					
	12,5 URD 72 TT F 0500	D300498	PC72UD13C500TF					
	12,5 URD 72 TT F 0550	E300499	PC72UD13C550TF					
	12,5 URD 72 TT F 0630	F300500	PC72UD13C630TF					
	11 URD 72 TT F 0700**	G300501	PC72UD11C700TF					
	11 URD 72 TT F 0800**	H300502	PC72UD11C800TF					
	10 URD 72 TT F 0900**	G300869	PC72UD10C900TF					
	8,5 URD 72 TT F 1000**	T301294	PC72UD85V1000TF					
	73	12,5 URD 73 TT F 0315	J300503			1250	1	PC73UD13C315TF
		12,5 URD 73 TT F 0350	K300504					PC73UD13C350TF
		12,5 URD 73 TT F 0400	L300505					PC73UD13C400TF
12,5 URD 73 TT F 0450		M300506	PC73UD13C450TF					
12,5 URD 73 TT F 0500		N300507	PC73UD13C500TF					
12,5 URD 73 TT F 0550		P300508	PC73UD13C550TF					
12,5 URD 73 TT F 0630		Q300509	PC73UD13C630TF					
12,5 URD 73 TT F 0700		R300510	PC73UD13C700TF					
12,5 URD 73 TT F 0800		S300511	PC73UD13C800TF					
12 URD 73 TT F 0900**		T300512	PC73UD12C900TF					
10 URD 73 TT F 1000**		V300513	PC73UD10C1000TF					
9,5 URD 73 TT F 1100**		W300514	PC73UD95V800TFB					
9 URD 73 TT F 1250**		T300696	PC73UD90V13CTF					
8,5 URD 73 TT F 1400**		S300718	PC73UD85C14CTF					
6,9 URD 73 TT F 1600**		B301301	PC73UD69V16CTF					
6 URD 73 TT F 1800**		C301302	PC73UD60V18CTF					

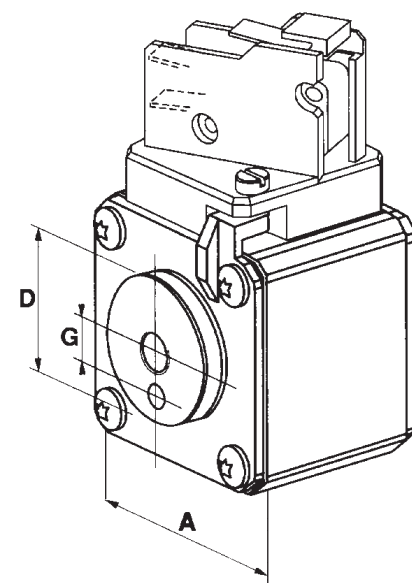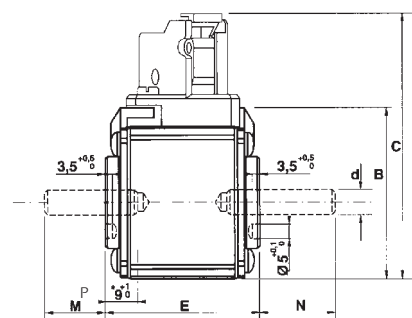

Microswitches and threaded studs supplied separately

Note:
Dimensions in mm
Dimensions in inches

Size	A	B	C	D	M [±]	N [±]	E ^{±1}	d	G ^{±0.1}	P ^{±0.1}
70	40	46,5	82	26	22	27	74	M8	9	6
	1-9/16"	1-27/32"	3-7/32"	1-1/64"			2-29/32"		23/64"	15/64"
71	51	56,5	91	30	19	24	74	M8	9	9
	2"	2-7/32"	3-37/64"	1-3/16"			2-29/32"		23/64"	23/64"
72	60	65,5	100	38 ; (42mm **)	19	39	74	M10	15	9
	2-3/8"	2-37/64"	3-15/16"	1-1/2" ; (1-21/32" **)			2-29/32"		19/32"	23/64"
73	74,5	79,5	114	46 ; (52mm **)	24	39	74	M12	15	9
	2-15/16"	3-1/8"	4-1/2"	1-13/16" ; (2-1/16" **)			2-29/32"		19/32"	23/64"

Semiconductor (AC) fuses




Protistor® Square-body Fuses


PSC aR sizes 7x - 650 V to 1300 VAC

IEC Terminals - French 272 - 273 End contacts


Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
73	12,5 URD 73 PPAF 0315	H300640	1250	1	PC73UD13C315PP4
	12,5 URD 73 PPAF 0350	J300641			PC73UD13C350PP4
	12,5 URD 73 PPAF 0400	K300642			PC73UD13C405PP4
	12,5 URD 73 PPAF 0450	L300643			PC73UD13C450PP4
	12,5 URD 73 PPAF 0500	M300644			PC73UD13C500PP4
	12,5 URD 73 PPAF 0550	N300645			PC73UD13C550PP4
	12,5 URD 73 PPAF 0630	P300646			PC73UD13C630PP4
	12,5 URD 73 PPAF 0700	Q300647			PC73UD13C700PP4
	12,5 URD 73 PPAF 0800	R300648			PC73UD13C800PP4
	12 URD 73 PPAF 0900	S300649			PC73UD12C900PP4
	10 URD 73 PPAF 1000	T300650			PC73UD10C10CPP4
	9,5 URD 73 PPAF 1100	V300651			PC73UD95V11CPP4
	9 URD 73 PPAF 1250	T300719			PC73UD90V13CPP4
8,5 URD 73 PPAF 1400	V300720	PC73UD85V14CPP4			
2 x 72	12,5 URD 272 TTF 0630	W300721	1900	1	PC272UD13C630TTF
	12,5 URD 272 TTF 0700	X300722			PC272UD13C700TTF
	12,5 URD 272 TTF 0800	Y300723			PC272UD13C800TTF
	12,5 URD 272 TTF 0900	Z300724			PC272UD13C900TTF
	12,5 URD 272 TTF 1000	A300725			PC272UD13C10CTF
	12,5 URD 272 TTF 1100	B300726			PC272UD13C11CTF
	11 URD 272 TTF 1250	M302231			PC272UD11C13CTF
	11 URD 272 TTF 1400	D300728			PC272UD11C14CTF
	10 URD 272 TTF 1600	L302230			PC272UD10C16CTF
	9 URD 272 TTF 1800	E301994			PC272UD90V18CTF
	7,5 URD 272 TTF 2000	F301995			PC272UD75V20CTF
	6,5 URD 272 TTF 2200	G301996			PC272UD65V22CTF
	6,5 URD 272 TTF 2500	H301997			PC272UD65V25CTF
2 x 73	12,5 URD 273 TTF 0800	F300730	2600	1	PC273UD13C800TTF
	12,5 URD 273 TTF 0900	G300731			PC273UD13C900TTF
	12,5 URD 273 TTF 1000	H300732			PC273UD13C10CTF
	12,5 URD 273 TTF 1100	J300733			PC273UD13C11CTF
	12,5 URD 273 TTF 1250	K300734			PC273UD13C13CTF
	11 URD 273 TTF 1400	K302229			PC273UD11C14CTF
	11 URD 273 TTF 1600	J302228			PC273UD11C16CTF
	11 URD 273 TTF 1800	S302236			PC273UD11C18CTF
	10 URD 273 TTF 2000	P300738			PC273UD10C20CTF
	9,5 URD 273 TTF 2200	Q300739			PC273UD95V22CTF
	9,5 URD 273 PLAF 2200	M301909			PC76UD95V22CP11
	9 URD 273 PLAF 2500	R300740			PC76UD90V25CP11
	8,5 URD 273 PLAF 2800	S300741			PC76UD85V28CP11
6 URD 273 PLAF 3000	K301999	PC76UD60V30CP11			
6 URD 273 PLAF 3200	M302001	PC76UD60V32CP11			
5,5 URD 273 PLAF 3600	N302002	PC76UD55V36CP11			

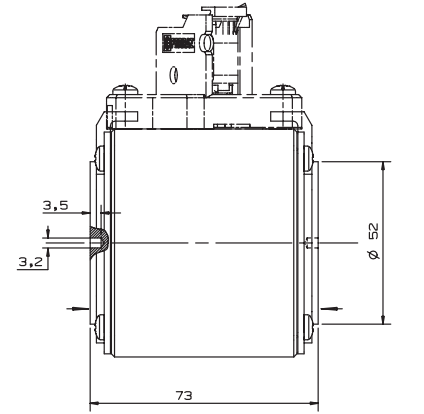

73 PPAF

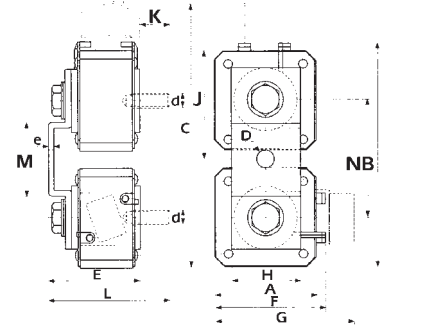

272 & 273 TTF

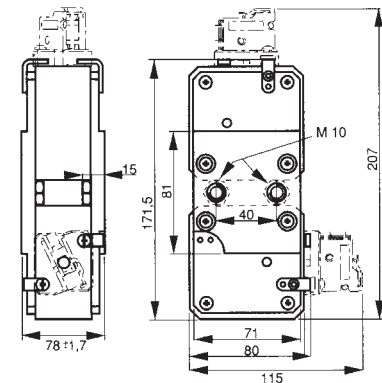

273 PLAF


Microswitches and threaded studs supplied separately

	A	B	C	D	E	F	G	H	J	K	d	e	L	M	N
2 x 72 TTF	60	138,5	172	11	91	65,5	100	35	66	39	M 10	4	131	48	72
2 x 73 TTF	74,5	167	200	13	91	79,5	114	50	80	39	M 12	4	131	54	86

Note:
Dimensions in mm

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Multiplier coefficient

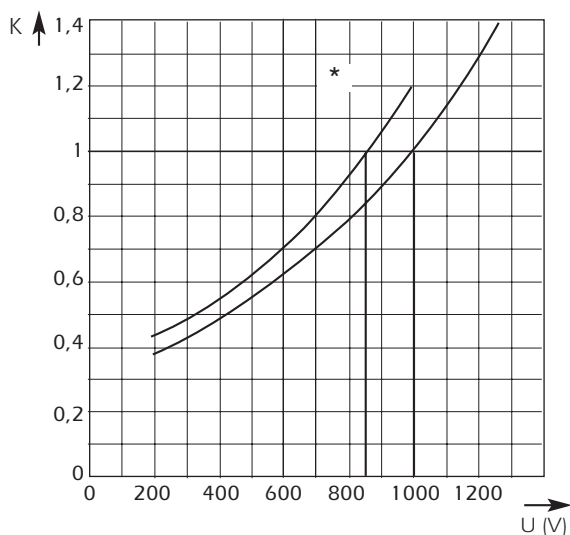

Left: Mean curve indicating variation of total I^2t (I^2t_t) and total operating time T_t in accordance with working voltage U .


Example:
Fuse 350 A in size 70.
 $I_p = 10\,000\text{ A}$ $U = 1100\text{ V}$

At 1000 V
 $I^2t_t = 115\,000\text{ A}^2\text{s}$ $T_t = 7\text{ ms}$

At 1100 V
 $I^2t_t = 115\,000 \times 1.13 = 130\,000\text{ A}^2\text{s}$
 $T_t = 7 \times 1.13 = 7.9\text{ ms}$


* curve for fuses with I^2t published at 850VAC

Dissipated power

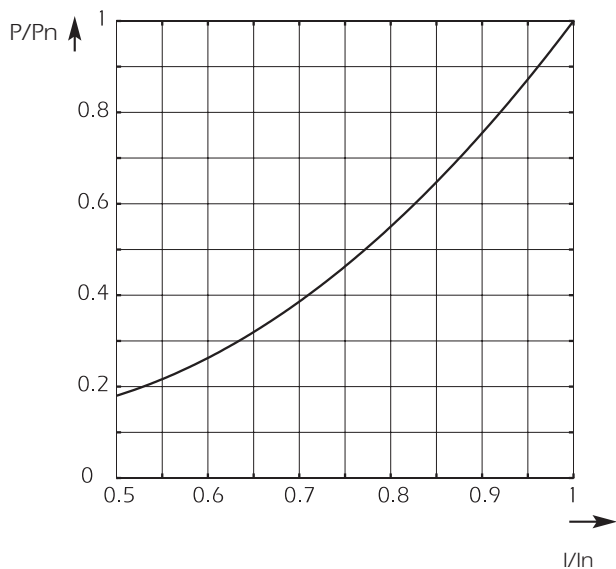

Above left: Curve enabling calculation of dissipated power P by a fuse rated I_{Nr} as a function of the RMS current I , in multiples of I_{Nr} , in steady state.

Arc voltage

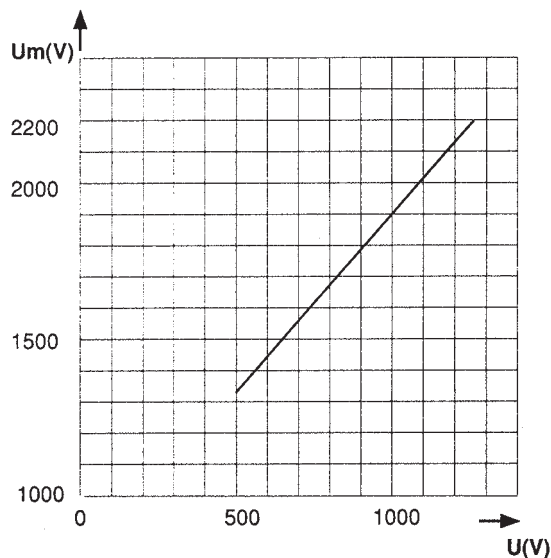

Above right: Curve indicating peak arc voltage U_m which may appear across fuse terminals as a function of working voltage U at $\cos \varphi = 0.15$




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 70

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

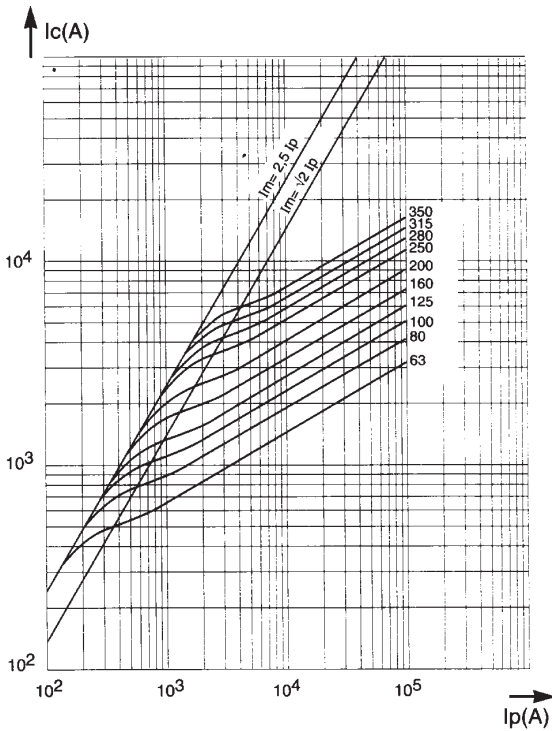

Time-current characteristics

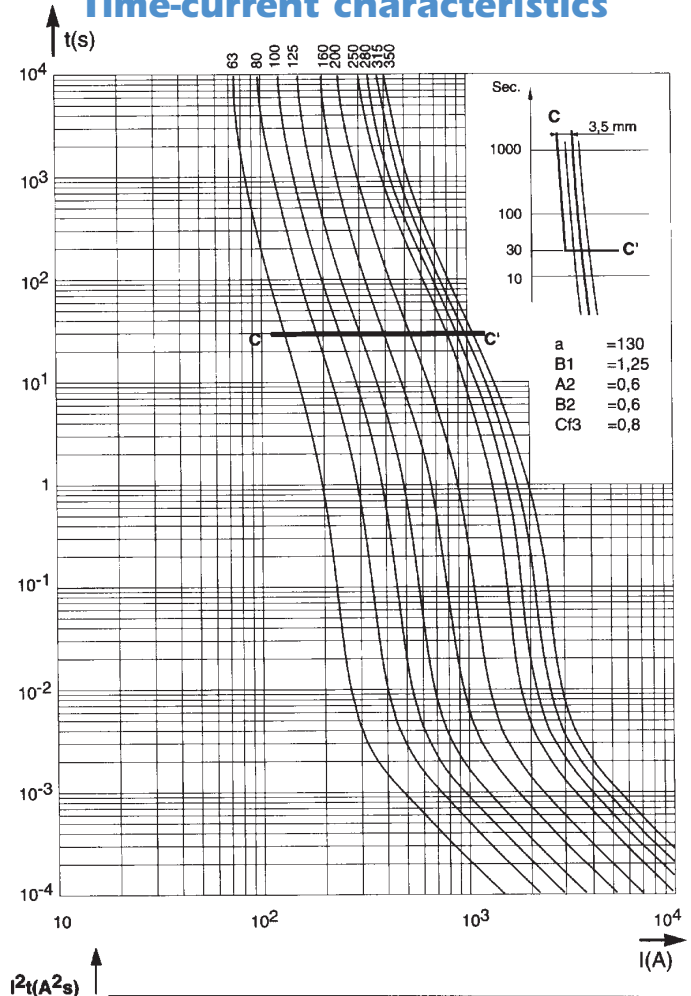

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.


The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

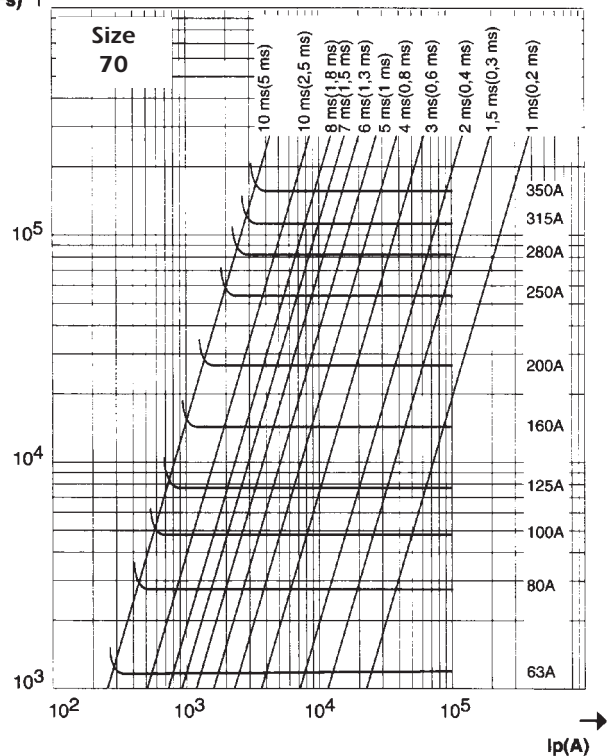

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_P .

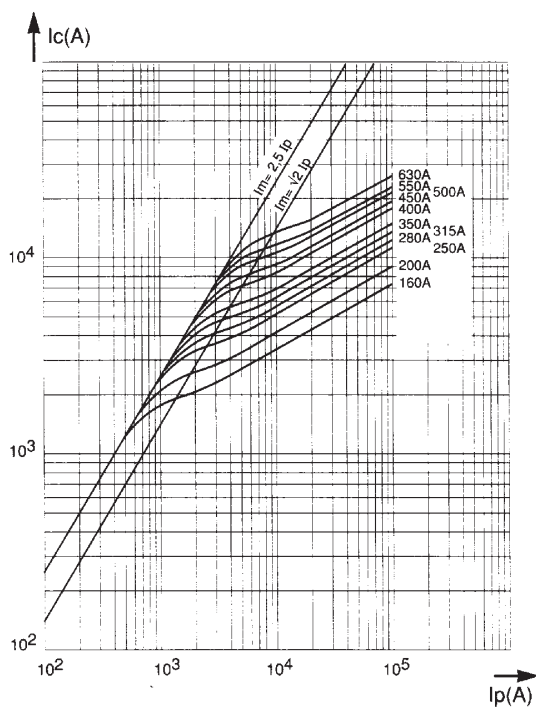

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_P at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_T with pre-arcing time in brackets.

Size 71

Time-current characteristics

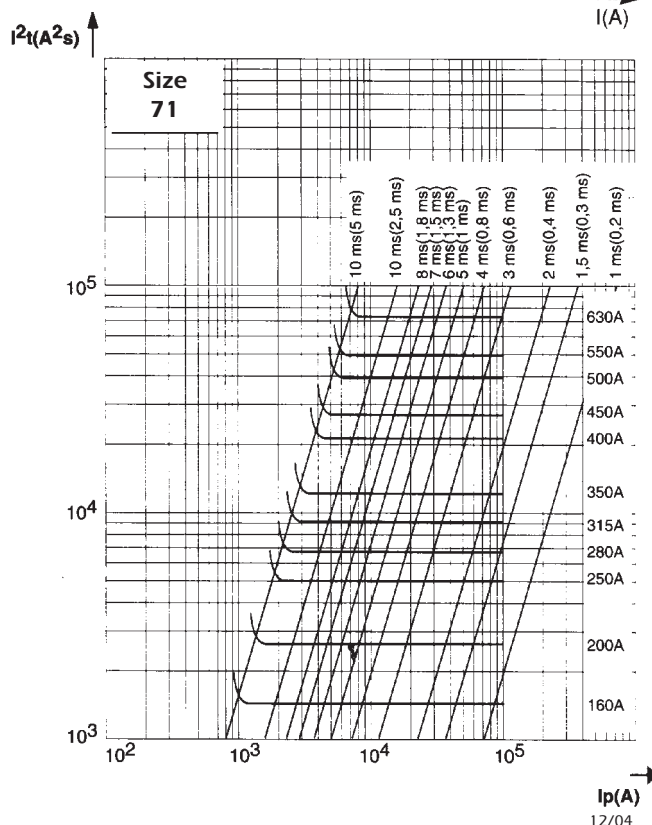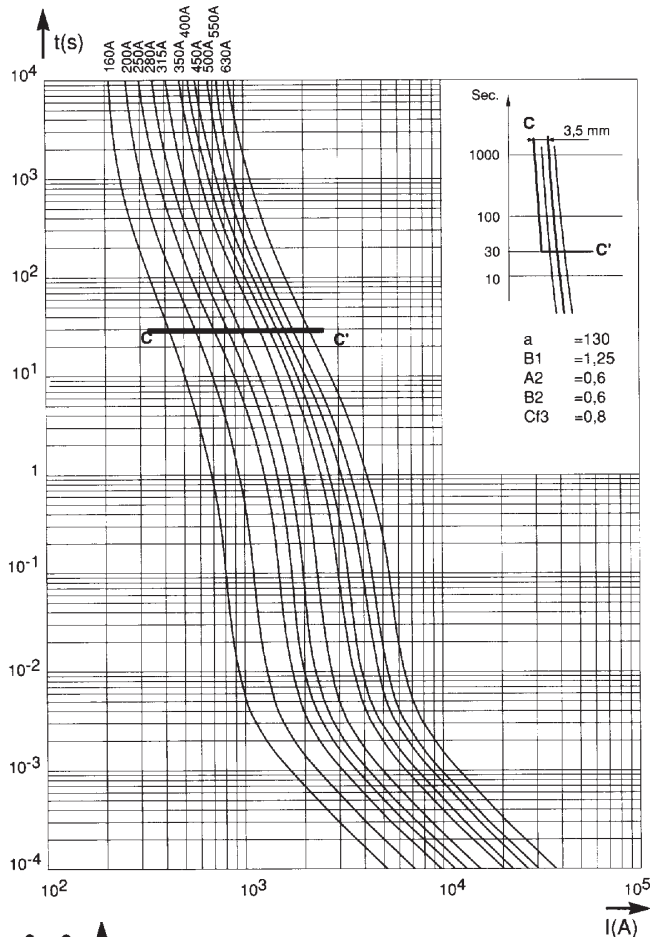




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Size 72

Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

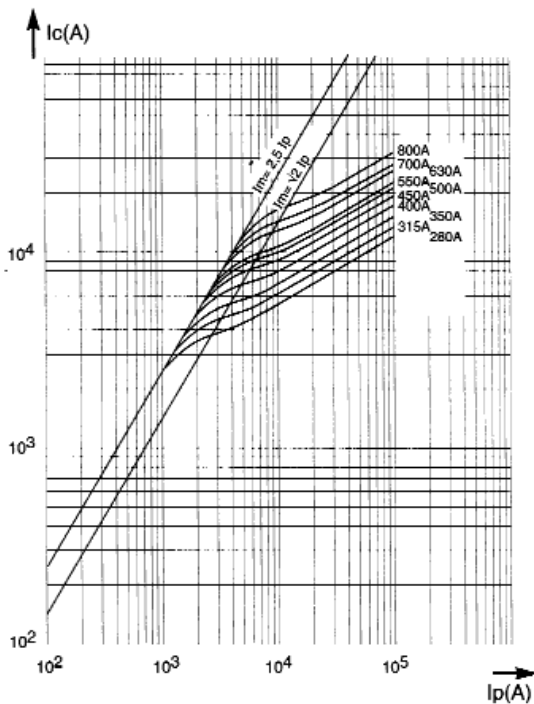

Time-current characteristics



Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Time-current characteristics

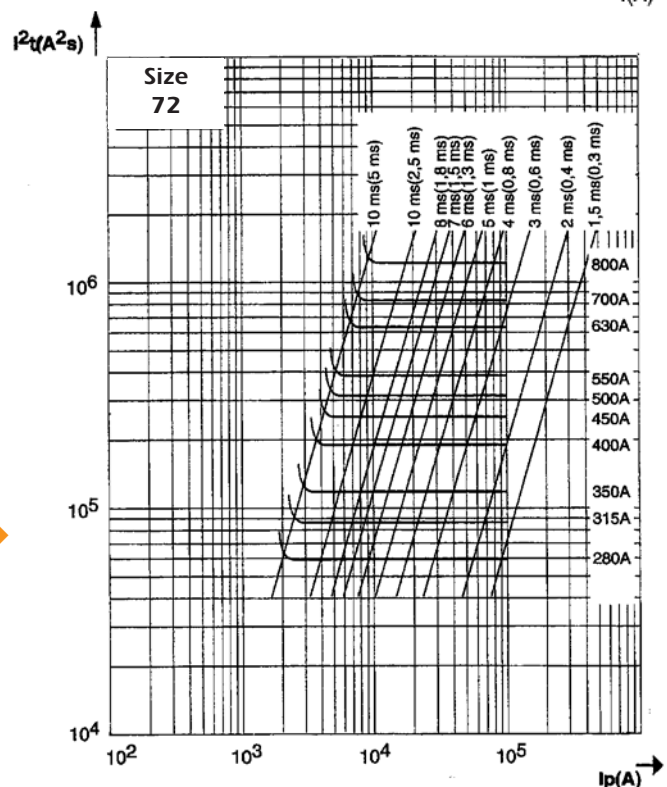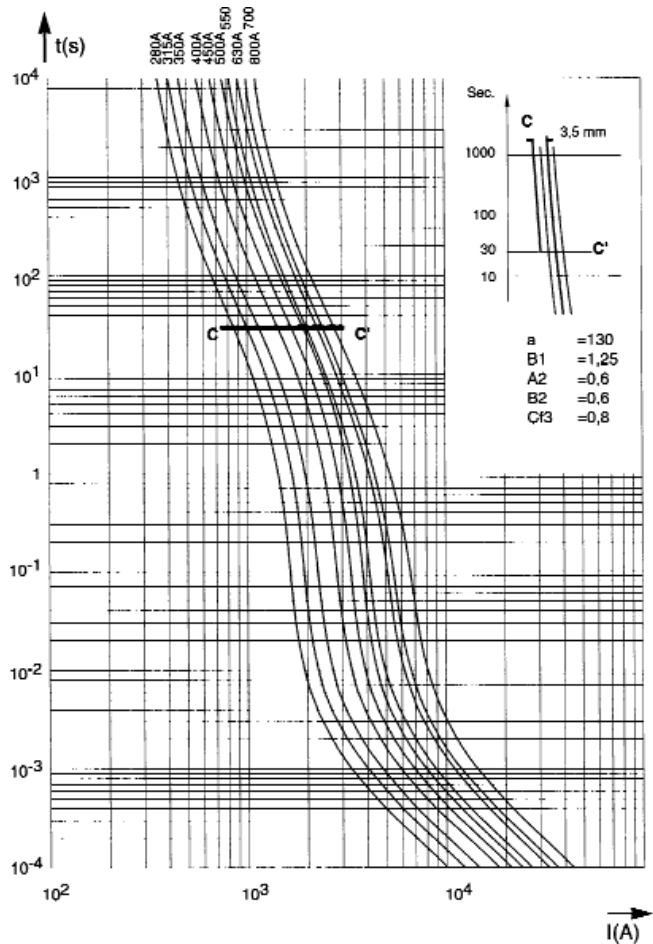


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 73

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

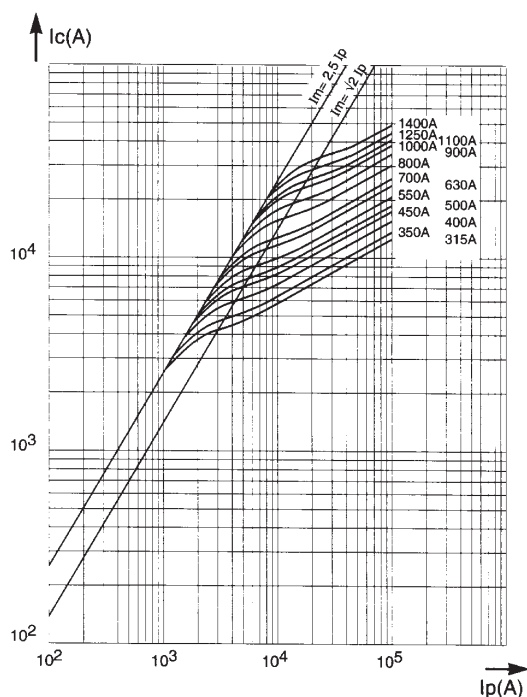

Time-current characteristics

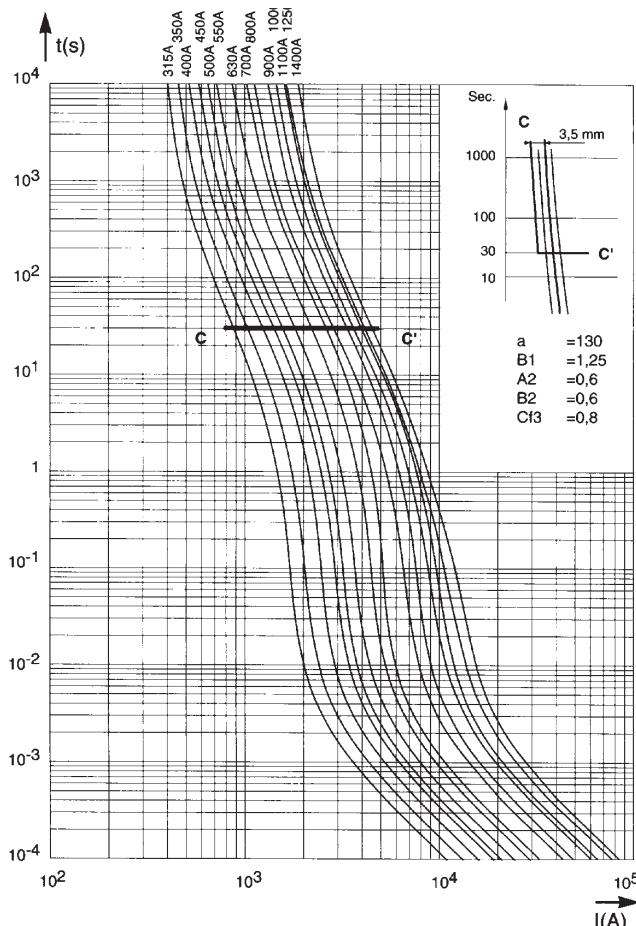

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

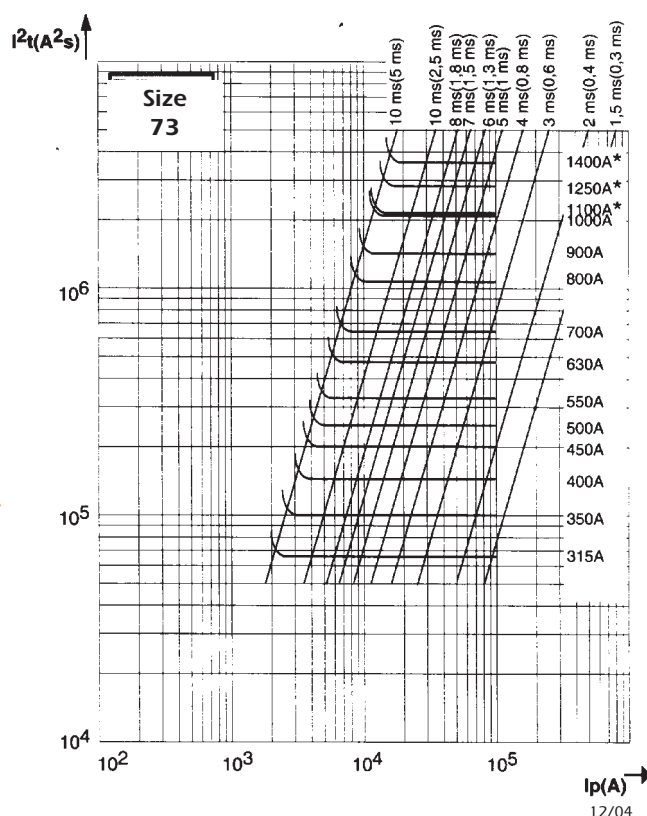




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

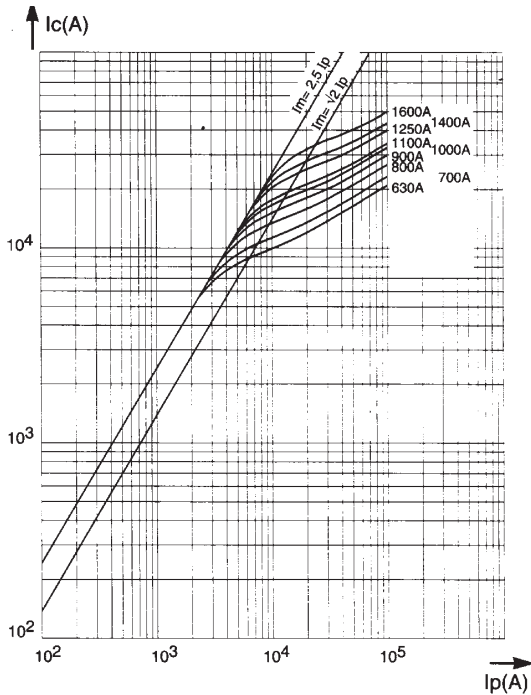

Time-current characteristics

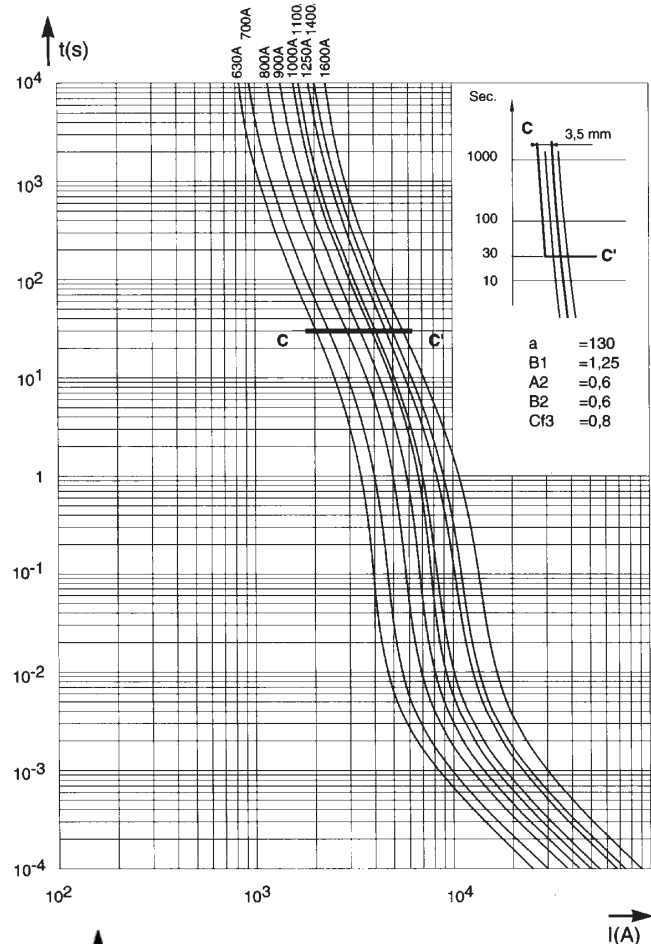

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.


The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

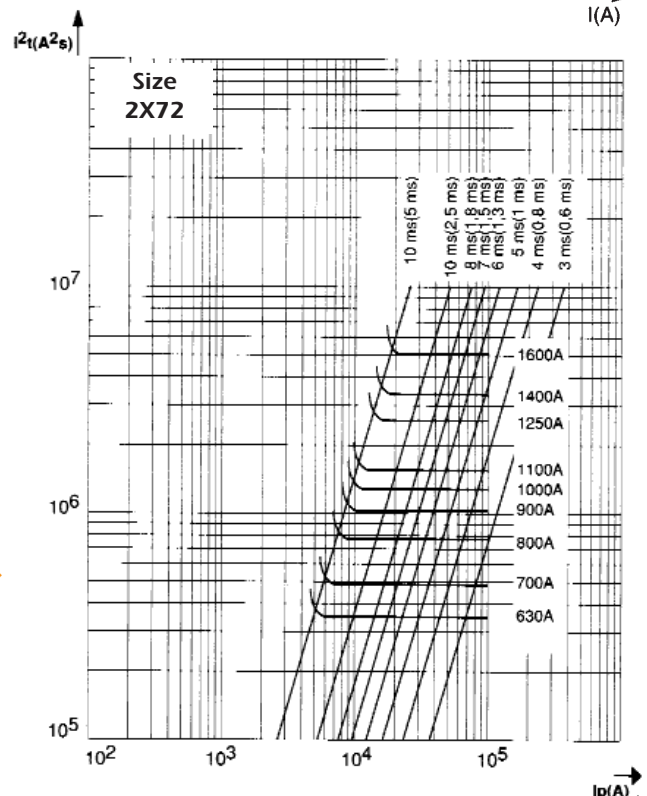

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

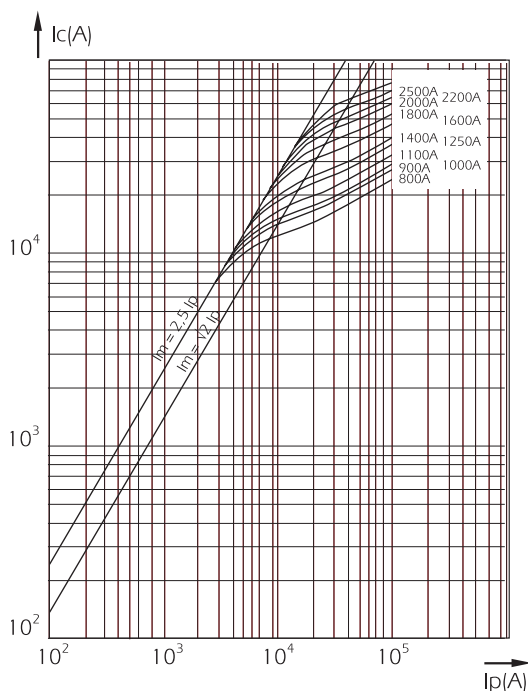

Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Size 2x72



Time-current characteristics

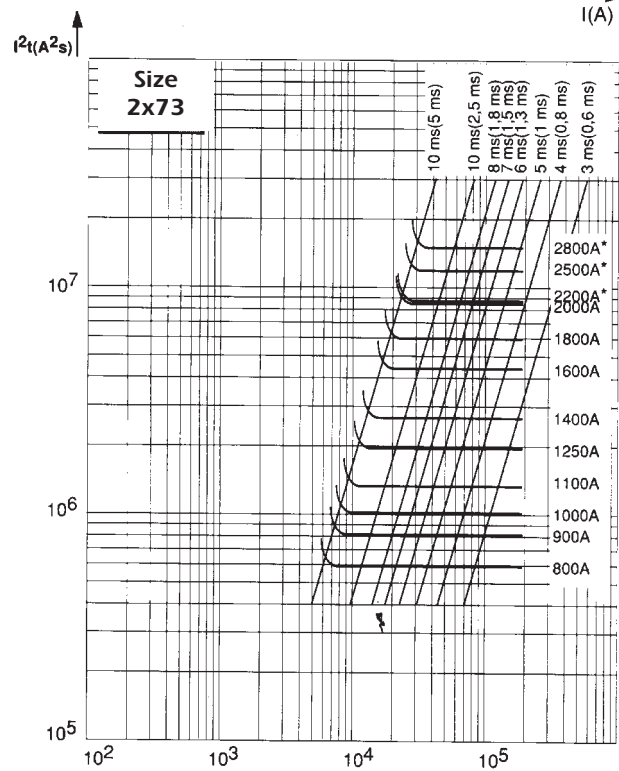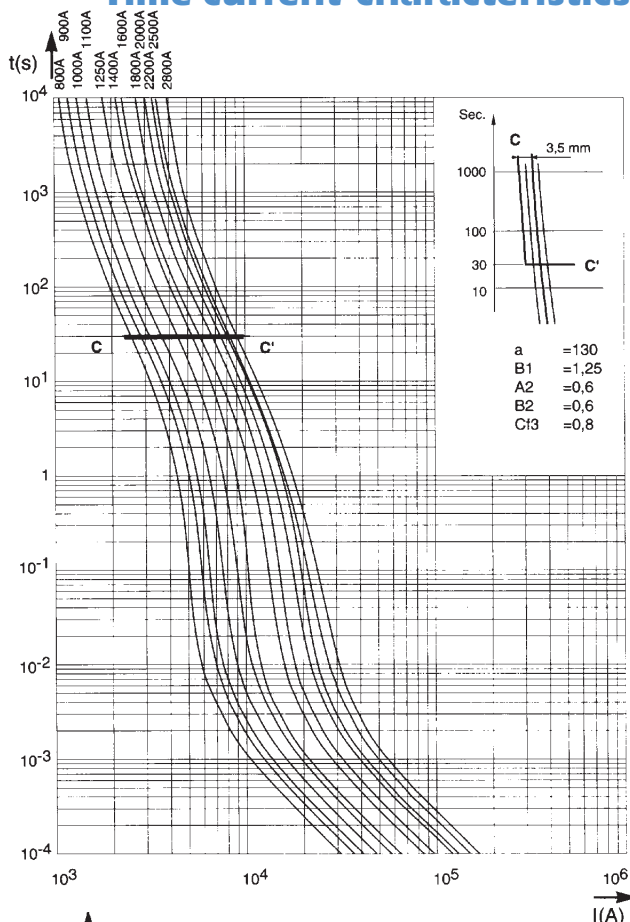



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

DC working voltage possibilities

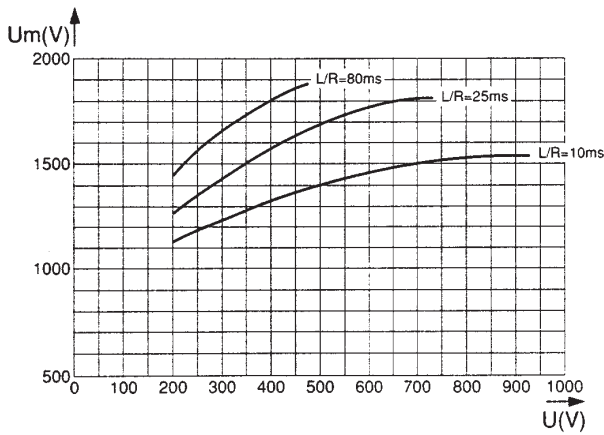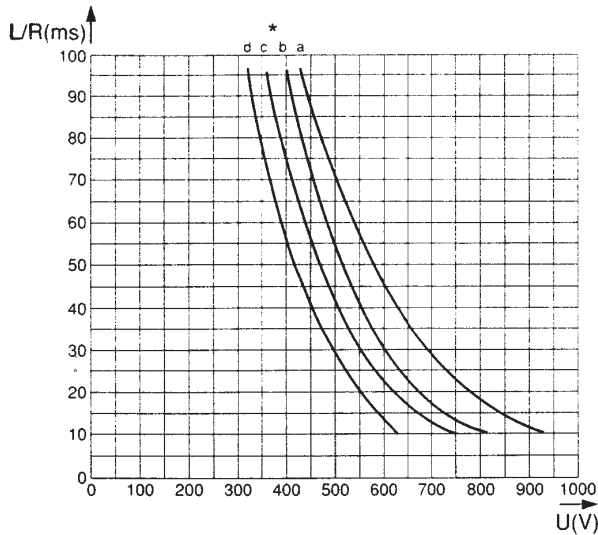

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents in the sizes indicated in the table.

I_{pm} (1) values indicate the minimum breaking current in Amperes (A).

Remark: When the fault current di/dt is very large, this condition can be exceeded. It is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Rated current I_N (A)	Curves (*) and I_{pm} (1) corresponding to the rating											
		70 * I_{pm} (A)	71 * I_{pm} (A)	72 * I_{pm} (A)	73 * I_{pm} (A)	2x72 * I_{pm} (A)	2x73 * I_{pm} (A)					
63	a	270										
80	a	400										
100	a	520										
125	a	700										
160	a	950	a	950								
200	a	1300	a	1300								
250	a	1800	a	1800								
280	b	2200	a	2000	a	1800						
315	b	2600	a	2300	a	2200	a	2000				
350	c	3000	a	2700	a	2600	a	2400				
400			b	3500	a	3200	a	3000				
450			b	4000	a	3800	a	3500				
500			c	4800	a	4600	a	3900				
550			c	5200	b	5000	a	4400				
630			c	6400	b	6200	a	5300	a	4400		
700				c	6800	a	6000	a	5200			
800					c	8000	b	8000	a	6400	a	6000
900							b	9000	a	7600	a	7000
1000							c	11000	a	9200	a	7800
1100							c	12000	b	10000	a	8800
1250							c	13500	b	12400	a	10600
1400							c	15000	c	13600	a	12000
1600								c	16000	b	16000	
1800											b	18000
2000											c	22000
2200											c	24000
2500											d	27000
2800											d	30000

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

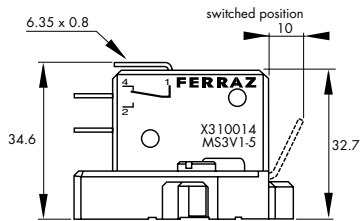


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

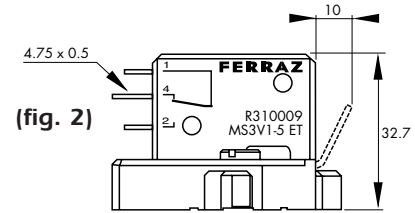


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

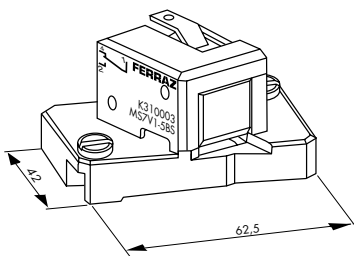

(fig. 5)

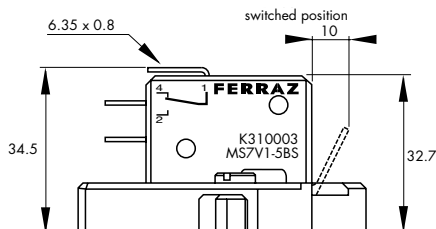


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

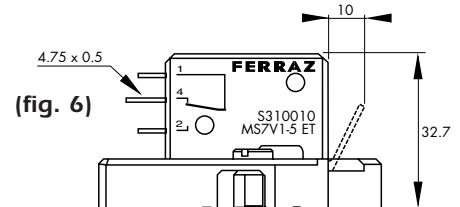



(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs

Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics



6,9 gRB 71 PA 200



6,9 gRB 73 TTF 1000
+ MS7V1-5 UR



6,9 gRB 70 EF 400



6,9 gRB 73 DIIA 1000

Ferraz Shawmut PSC-gRB 690 VAC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. This range is a fast acting, full range fuses engineered to provide state of the art protection for power semiconductors such as diodes, thyristors.

These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high breaking capacity. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly on to the fuse in service.

Feature

- Full range (gR curve), fast acting
- Highly current limiting.
- High breaking capacities
- Very low I^2t
- Worldwide mounting acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads

Ratings

AC: up to 1000 A 690 VAC
150 kA IR

DC: Consult Factory

Applications

Protection of rectifiers, inverters, static switch, AC & DC drives and UPS systems.

AC: Tested to IEC 60269.4

approvals

Features/Benefits

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Main characteristics

Voltage	Size	Type	Rating In (A)	Pre-Arcing I ² t @ 1ms kA ² s	Total I ² t @ 690V kA ² s	PN: Power losses (W)				Breaking capacities (kA)
						End contacts		Blades		
						0,8 In	In	0,8In	In	
690V	70	gRB	50	0,12	0,7	9	17	9	17	150
		gRB	63	0,27	1,6	9	18	9	18	
		gRB	80	0,47	2,8	11	22	11	22	
		gRB	100	1,06	6,2	12	23	12	23	
		gRB	125	1,9	11,2	13	26	13	26	
		gRB	160	4,2	25	15	29	15	29	
		gRB	200	7,5	44	17	33	17	34	
		gRB	250	13,5	79	20	39	20	40	
		gRB	315	24	142	23	46	24	47	
	gRB	350	41	240	23	46	24	47		
	gRB	125	1,06	6,2	18	35	18	35		
	gRB	160	2,4	14	19	38	19	38		
	gRB	200	5	29,5	21	41	21	42		
	gRB	250	9,5	56	23	46	24	48		
	gRB	315	18,5	108	27	53	27	54		
	gRB	350	23	140	29	58	30	60		
	gRB	400	38	225	30	59	31	61		
	gRB	450	62	360	30	59	31	61		
	gRB	500	78	460	32	64	34	67		
	gRB	200	4,2	25	23	45	23	45		
	gRB	250	8,5	50	25	49	25	50		
	gRB	315	17	100	28	55	29	57		
	gRB	350	23	140	29	58	30	60		
	gRB	400	34	200	32	63	33	65		
	gRB	450	47	280	34	67	35	70		
	gRB	500	68	400	35	69	36	72		
	gRB	550	84	495	38	75	39	78		
	gRB	630	124	730	41	81	43	86		
	gRB	700	155	910	45	89	48	95		
	gRB	315	12	69	33	66	34	67		
	gRB	350	17	100	34	68	35	69		
	gRB	400	27	160	36	71	37	73		
	gRB	450	34	200	40	79	41	82		
	gRB	500	47	280	42	84	43	86		
	gRB	550	68	400	42	84	44	87		
	gRB	630	102	600	45	89	47	94		
	gRB	700	139	820	47	94	50	100		
	gRB	800	227	1330	48	96	52	104		
	gRB	900	280	1640	55	109	60	119		
	gRB	1000	385	2270	58	115	64	127		



Time/current characteristics
Cut off characteristics
Total I²t and total operating time
Other curves

} see following pages



Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC French 70-73 Blades

Size	Designation	Reference Number	Weight (g)	Catalog Number
70	6,9 gRB 70 EF 050	P301405	370	PC70GB69V50EF
	6,9 gRB 70 EF 063	Q301406		PC70GB69V63EF
	6,9 gRB 70 EF 080	R301407		PC70GB69V80EF
	6,9 gRB 70 EF 100	S301408		PC70GB69V100EF
	6,9 gRB 70 EF 125	T301409		PC70GB69V125EF
	6,9 gRB 70 EF 160	V301410		PC70GB69V160EF
	6,9 gRB 70 EF 200			
	6,9 gRB 70 EF 250			
	6,9 gRB 70 EF 315			
71	6,9 gRB 71 EF 125	Y301321	540	PC71GB69V125EF
	6,9 gRB 71 EF 160	Z301322		PC71GB69V160EF
	6,9 gRB 71 EF 200	A301323		PC71GB69V200EF
	6,9 gRB 71 EF 250	B301324		PC71GB69V250EF
	6,9 gRB 71 EF 315			
	6,9 gRB 71 EF 350	C301325		PC71GB69V350EF
	6,9 gRB 71 EF 400	D301326		PC71GB69V400EF
	6,9 gRB 71 EF 450	E301327		PC71GB69V450EF
	6,9 gRB 71 EF 500	G301858		PC71GB69V500EF
72	6,9 gRB 72 EF 200	N301335	810	PC72GB69V200EF
	6,9 gRB 72 EF 250	P301336		PC72GB69V250EF
	6,9 gRB 72 EF 315	Q301337		PC72GB69V315EF
	6,9 gRB 72 EF 350			
	6,9 gRB 72 EF 400	R301338		PC72GB69V400EF
	6,9 gRB 72 EF 450			
	6,9 gRB 72 EF 500	S301339		PC72GB69V500EF
	6,9 gRB 72 EF 550	T301340		PC72GB69V550EF
	6,9 gRB 72 EF 630	V301341		PC72GB69V630EF
73	6,9 gRB 73 EF 315	C301348	1150	PC73GB69V315EF
	6,9 gRB 73 EF 350			
	6,9 gRB 73 EF 400	D301349		PC73GB69V400EF
	6,9 gRB 73 EF 450	E301350		PC73GB69V450EF
	6,9 gRB 73 EF 500			
	6,9 gRB 73 EF 550	F301351		PC73GB69V550EF
	6,9 gRB 73 EF 630	G301352		PC73GB69V630EF
	6,9 gRB 73 EF 700	H301353		PC73GB69V700EF
	6,9 gRB 73 EF 800			
6,9 gRB 73 EF 900				
6,9 gRB 73 EF 1000				

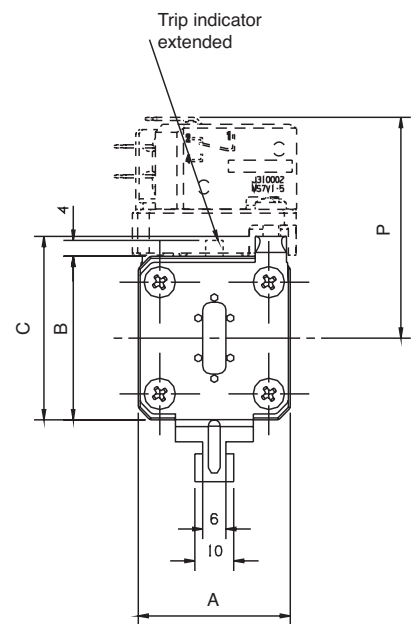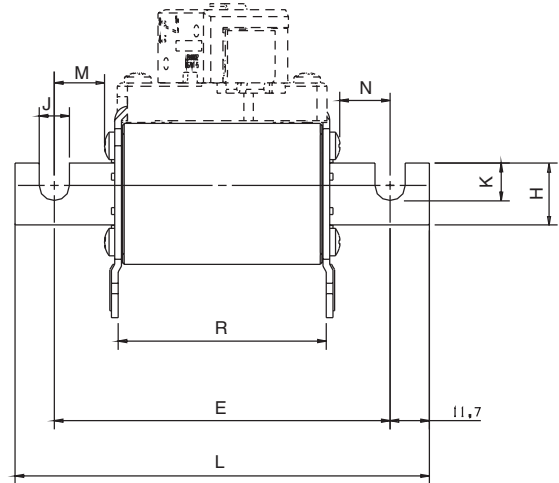

Packaging: 3 pieces sizes 70 and 71 / 1 piece size 72 and 73

Microswitches: MS 7V 1-5		Réf.J310002	Standard NO-NC
MS 7V 1-5 UR		Réf.Z310039	Standard NO-NC
MS 7V 1-5 BS		Réf.K310003	Low level NO-NC
MS 7V 1-9 BS		Réf.P310007	Double pole NO-NC-low level
MS 7V 1-5 ET		Réf.S310010	Low level NO-NC-IP 50

Microswitches supplied separately

Size	A	B	C	E ^{+1,3}	H	J	K	L ^{+1,5}	M	N	P	R
70	39,8	41,8	46,5	100	18	9	11	123,4	28,2	28,2	77	68
	1.57"	1.65"	1.83"	3.94"	0.71"	0.35"	0.43"	4.86"	1.11"	1.11"	3.03"	2.68"
71	51	51	56,5	110	25	10,5	16	133,4	32,7	32,7	91	68
	2.00"	2.00"	2.22"	4.33"	0.98"	0.41"	0.63"	5.25"	1.29"	1.29"	3.58"	2.68"
72	60	60	65,5	114,4	32	13	21,2	149,4	40,7	40,7	100	68
	2.36"	2.36"	2.58"	4.50"	1.26"	0.51"	0.83"	5.88"	1.60"	1.60"	3.93"	2.68"
73	74,4	74,4	78,5	114,4	40	13	19,5	149,4	40,7	40,7	114,4	68
	2.93"	2.93"	3.09"	4.50"	1.58"	0.51"	0.77"	5.88"	1.60"	1.60"	4.50"	2.68"

Reinforced and longer knives available under designation ESF
Fuse holder solution, see Fuse gear section.




Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

I²t Multiplier coefficient

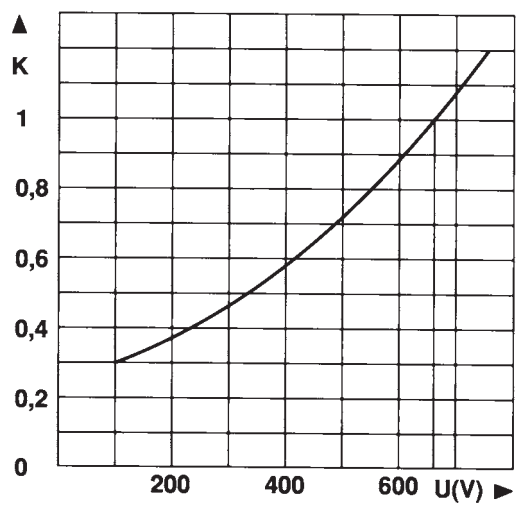

Mean curve indicating variation of total I²t (I²t_t) and total operating time T_t in accordance with working voltage U.


Example:

Fuse 350 A in size 30.
I_p = 10 000 A U = 500 V

At 660 V
I²t_t = 80 000 A²s T_t = 6 ms


At 500 V
I²t_t = 80 000 x 0.72 = 57 600 A²s
T_t = 6 x 0.72 = 4.3 ms

Dissipated power

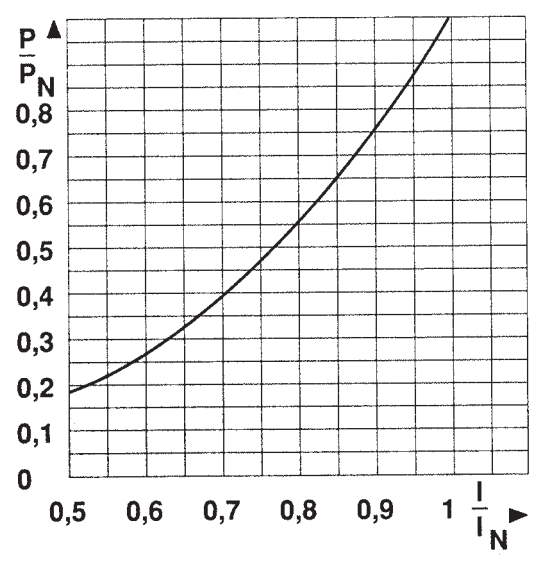

Curve enabling calculation of dissipated power P by a fuse rated I_N, as a function of the RMS current I, in multiples of I_N, in a steady state.

Arc voltage

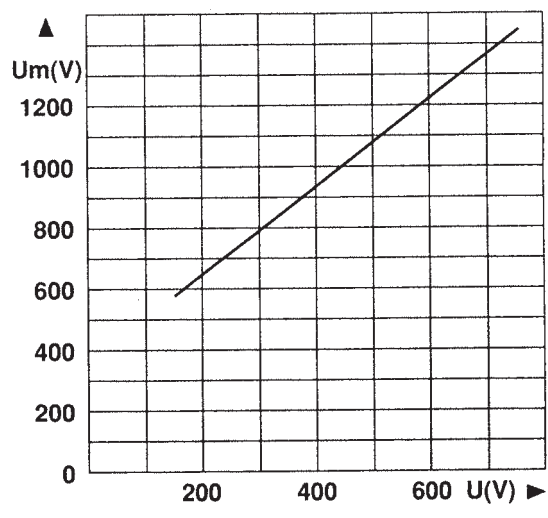


Curve indicating peak arc voltage U_m which may appear across fuse terminals as function of working voltage U at cos φ = 0.15





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 30

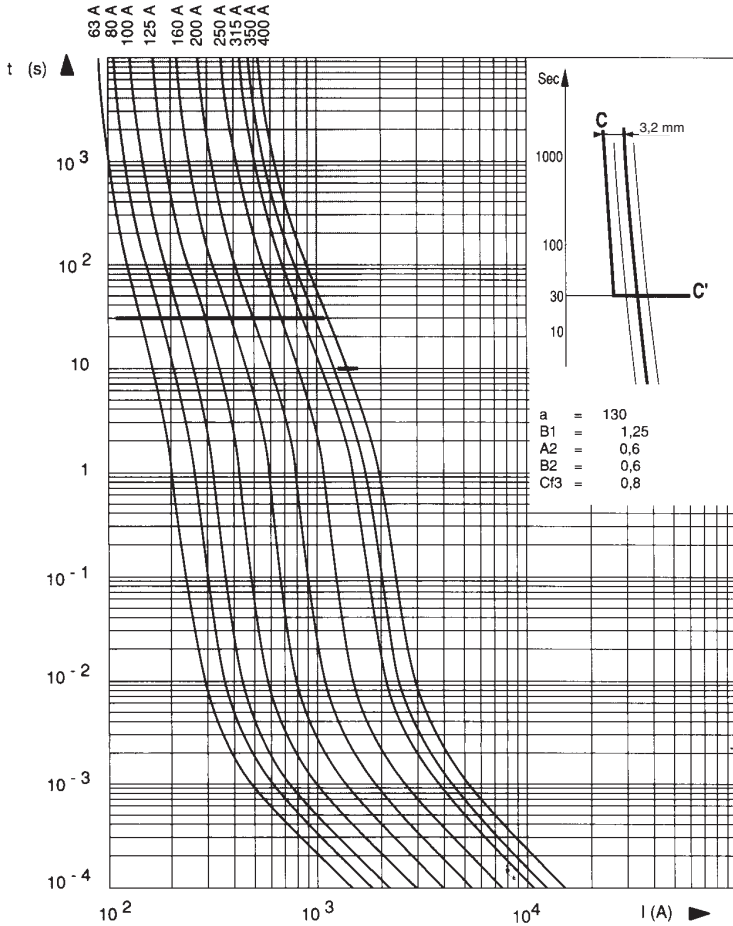

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

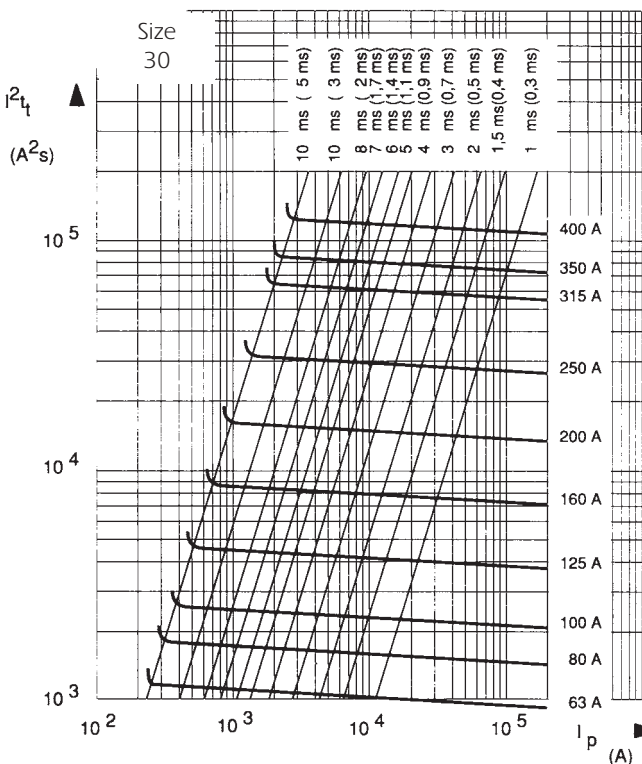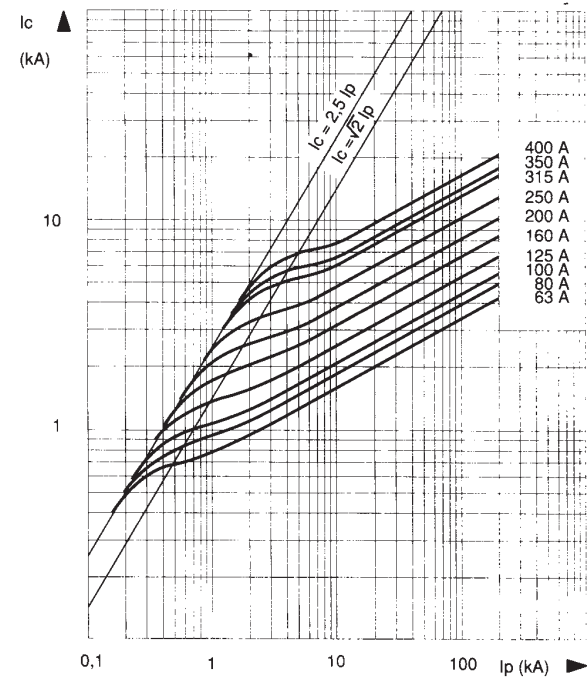

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 31

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

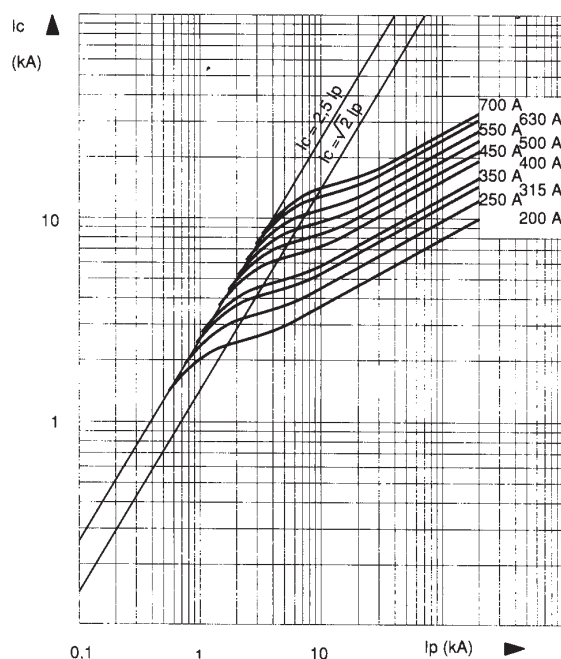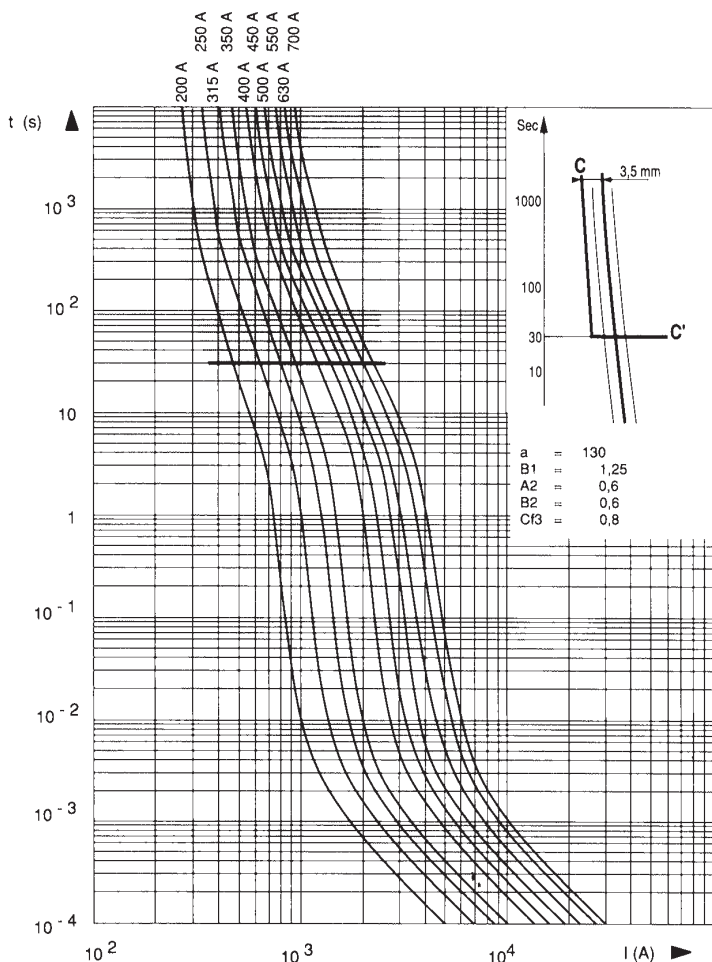


↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_T , with pre-arcing time in brackets.

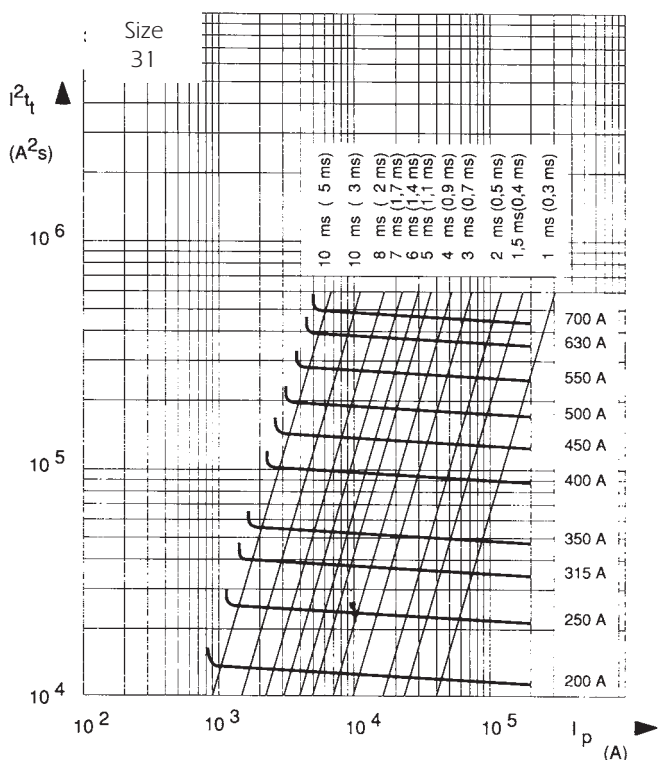





Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 32

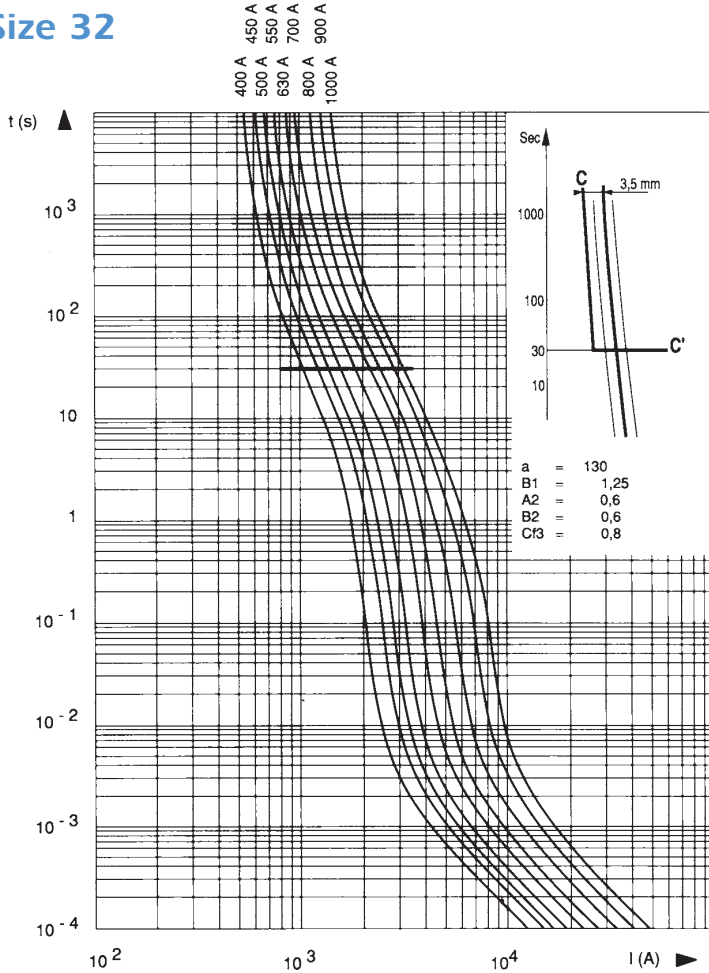

↓ Cut-off characteristics

Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

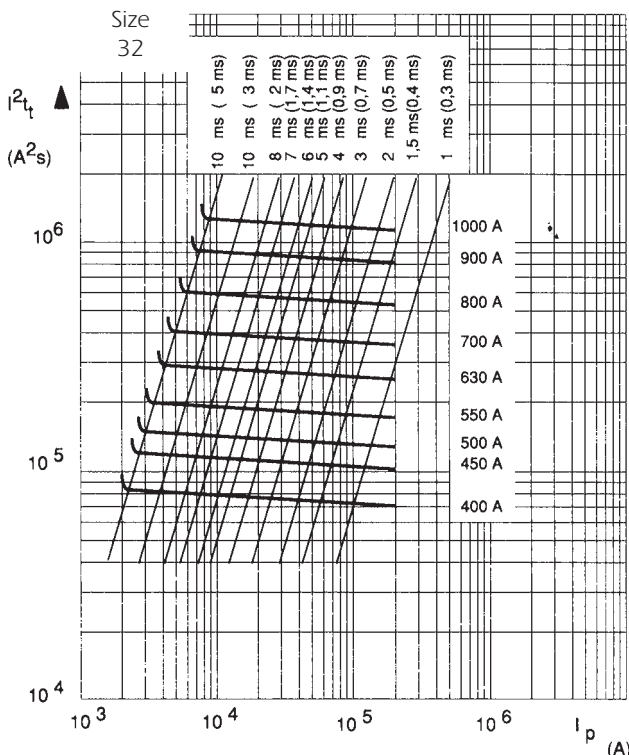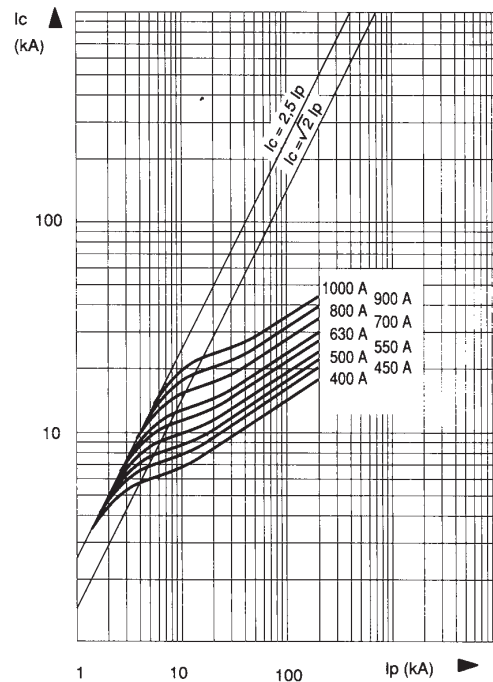

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .


- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

← Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.



Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 33

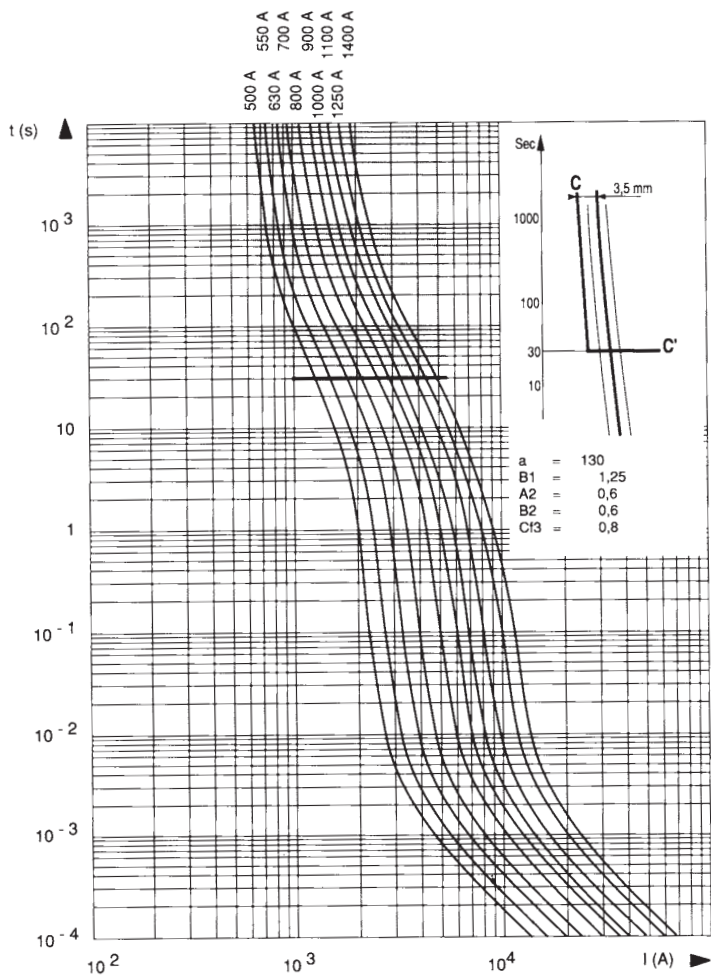

↓ Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

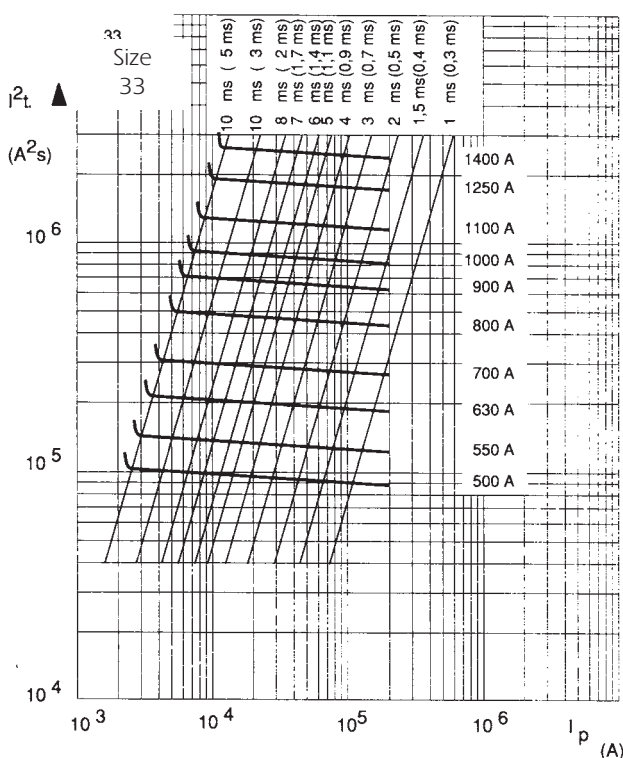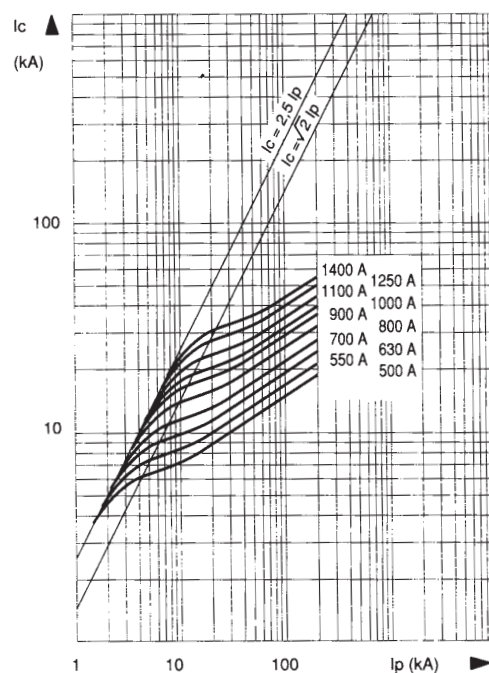

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.


← Maximum values of total operating I²t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 2x32

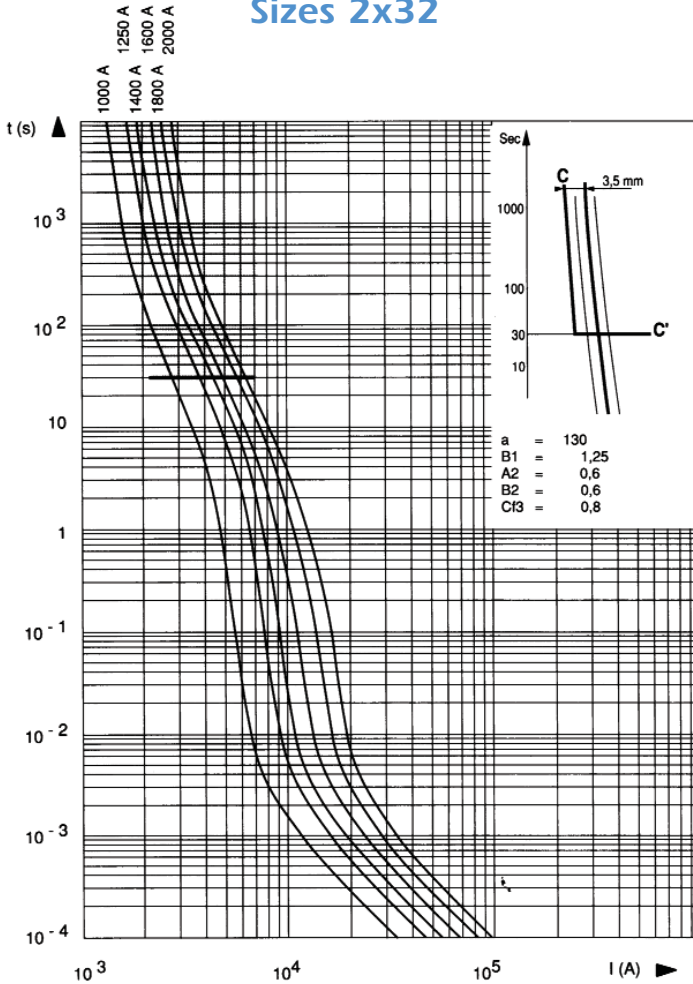

↓ Cut-off characteristics


Below, right: Curves indicating for each rated-current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

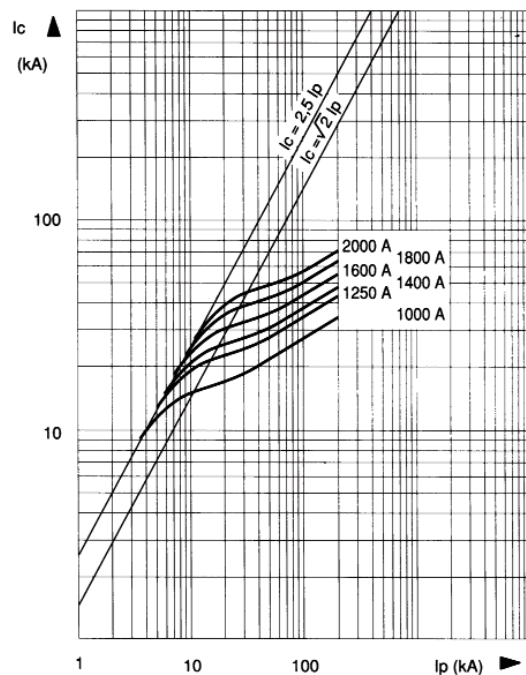

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

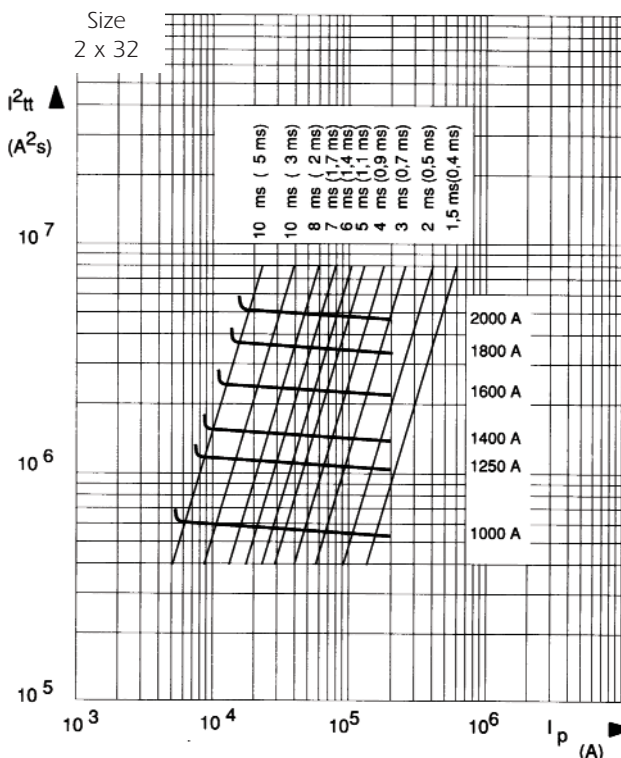

← Maximum values of total operating I^2t and total operating times



Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Size 2x33

↓ Cut-off characteristics


Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

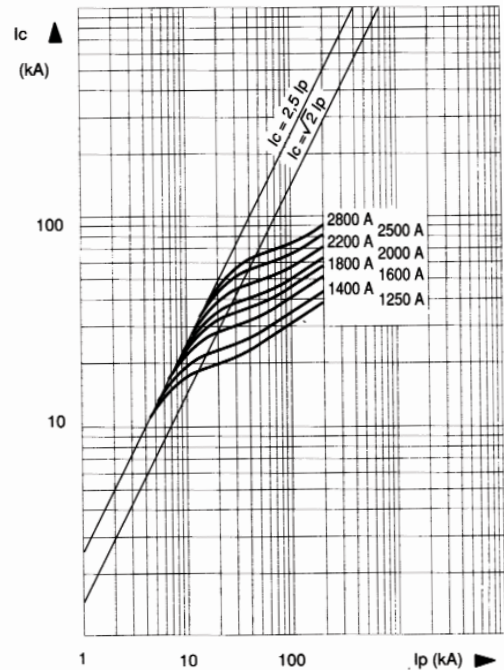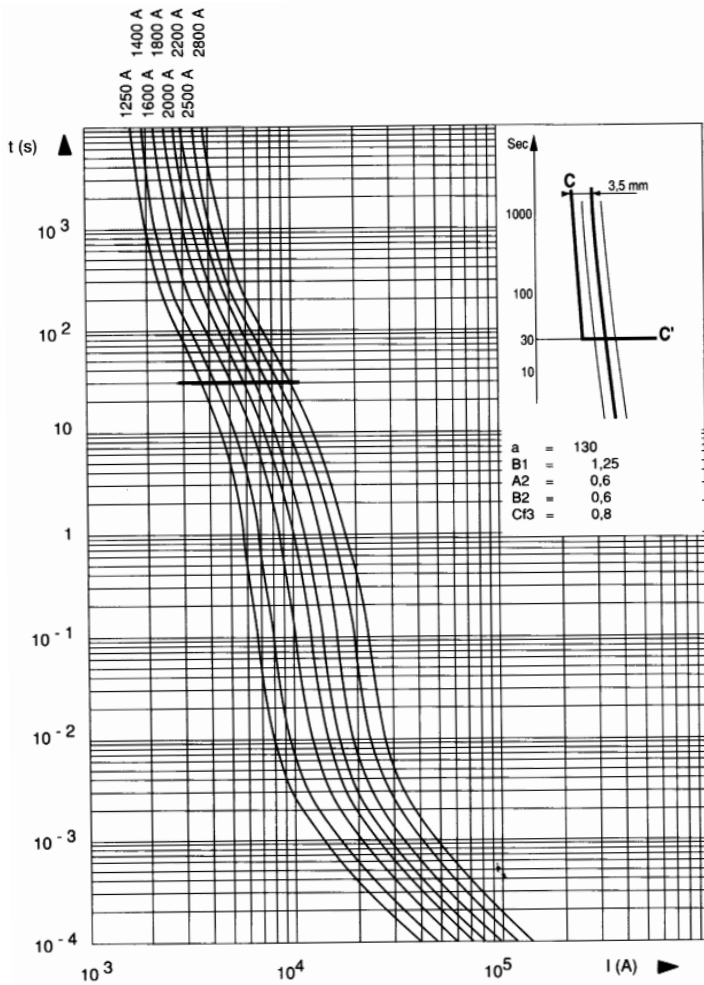

↑ Time-current characteristics

Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec or 10 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

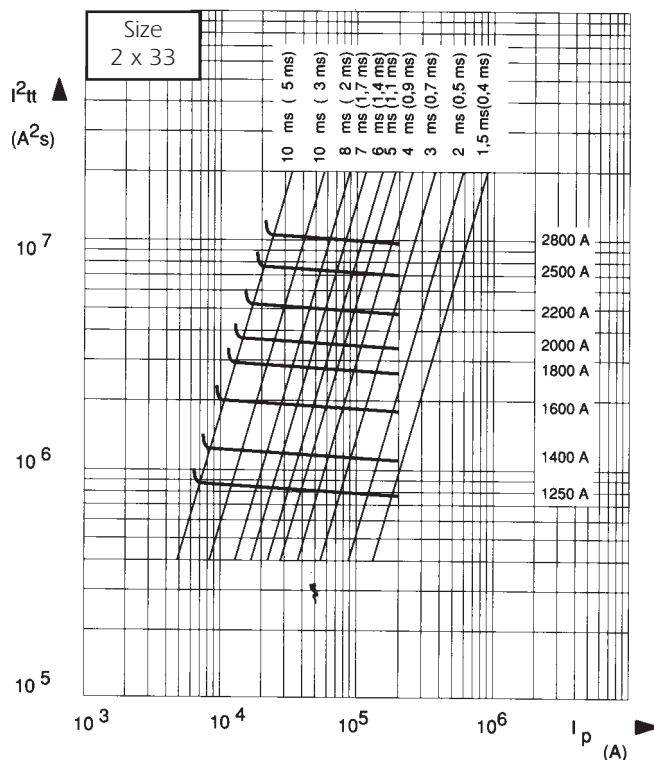

← Maximum values of total operating I^2t and total operating times


Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 660 V, $\cos \varphi = 0.15$. The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Curves set

Sizes 30 - 31 - 32 - 33

DC working voltage possibilities

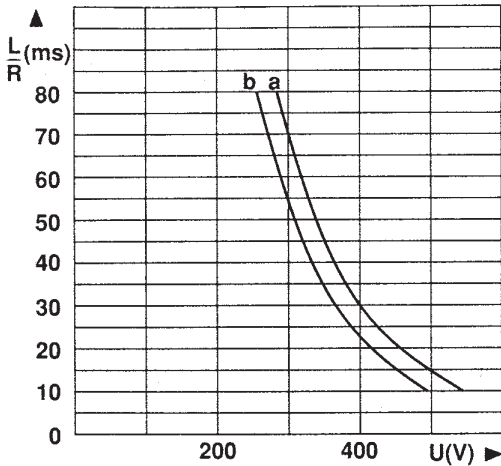

Rated current In (A)	Curves (*) and Ipm (†) corresponding to the rating					
	30 * Ipm (A)	31 * Ipm (A)	32 * Ipm (A)	33 * Ipm (A)	2 x 32 * Ipm (A)	2 x 33 * Ipm (A)
63	a 230					
80	a 300					
100	a 360					
125	a 460					
160	a 650					
200	a 880	a 850				
250	a 1300	a 1150				
315	a 1700	a 1450				
350	a 1900	a 1600				
400	a 2300	a 2200	a 2000			
450		a 2500	a 2300			
500		a 3000	a 2600	a 2300		
550		a 3400	a 3150	a 2500		
630		a 5000	a 3700	a 3250		
700		a 5600	a 4300	a 3900		
800			a 5300	a 4800		
900			a 7800	a 5600		
1000			b 9000	a 6600	a 5200	
1100				a 7700		
1250				b 11000	a 7400	a 6500
1400				b 12500	a 8600	a 7800
1600					a 10600	a 9600
1800					a 15600	a 11200
2000					b 18000	a 13200
2200						a 15400
2500						b 22000
2800						b 25000

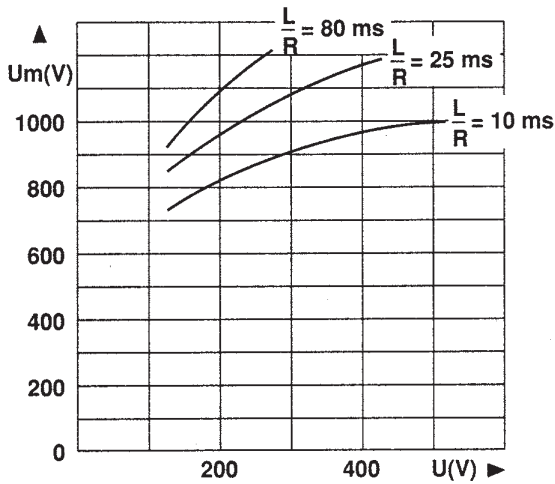

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U for the rated currents in the sizes indicated in the table.

I_{pm} (†) values indicate the minimum breaking current in Amperes (A).

Remark:

When the fault current di/dt is very large, this condition can be exceeded. This is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

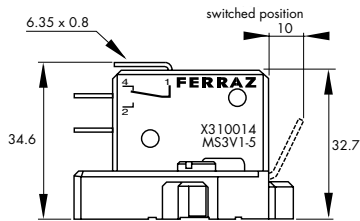


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

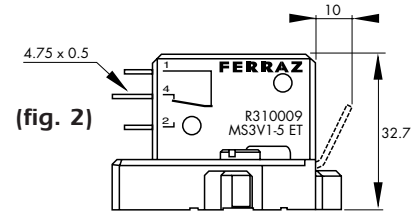


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

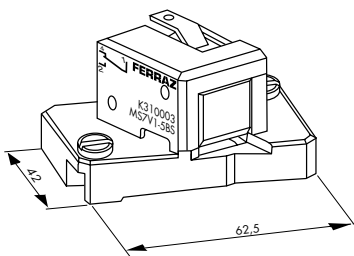

(fig. 5)

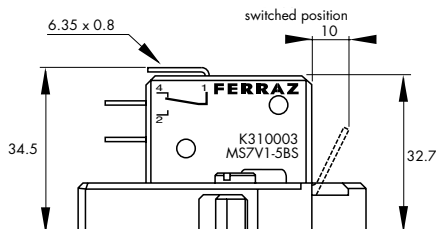


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

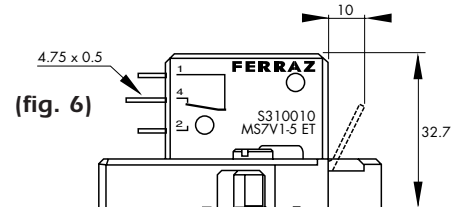

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

 Recognized

650 to 1300VAC / 63 to 2800A.

- Exceptionally low I²T, Watt losses.
- Non-magnetic construction, highly reliable low voltage.
- Indicator system.
- Conformity to UL, CSA investigated, IEC, DIN and VDE standards.
- Increased technical performance
- Higher ratings.
- Reduction in volume and weight.
- This fuse preselection table indicates, for each size:
 - rated current (or rating) I_n
 - pre-arcing I²t (I²t_p) at 1 ms
 - total operating I²t (I²t_t) at 1000 V and 850V(I)f=50Hz, cos φ =0.15, and for a total operating time from 8 to 10 ms
 - dissipated power P_n at the rated current I_n, and at 0.8 I_n, in steady state
 - breaking capacity at various voltages, checked by tests made in accordance with IEC and American standards.



Estimated breaking capacity: 300 kA

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I ² t @ 1ms (kA ² s)	Total I ² t @ 1000V (*) @ U _n (kA ² s)	Power (W)		Tested Breaking capacity	
	IEC	UL				End contacts	Blades	IEC	USA
70	1250	1300	50	0,116	0,7	16	16	100kA @ 1250V	100kA @ 1300V
			63	0,210	1,2	26	26		
			80	0,470	2,7	27	27		
			100	0,830	4,8	30	30		
			125	1,30	7,5	38	38		
			160	2,55	15	45	45		
	1200	1300	200	4,7	27	54	56	100kA @ 1200V	100kA @ 1300V
			250	9,6	55	58	61		
			280	14	82	61	64		
			315	20	115	66	72		
			350	28	158	68	75		
			400	39	224	81	90		
1100	1200	450	62	356	82	82	150kA @ 1100V	150kA @ 1200V	
		500	84	483	83	83			
		800	900	550	128	576(*)			83
750	800	550	128	576(*)	83	83	100kA @ 800V	100kA @ 900V	
		630	176	730(*)	91	91			
		630	176	730(*)	91	91			100kA @ 750V
71	1250	1300	160	2,6	15	46	46	100kA @ 1250V	100kA @ 1300V
			200	4,7	27	54	54		
			250	8,9	51	61	61		
			280	12	68	68	70		
			315	16	92	73	76		
			350	22	127	76	80		
			400	38	220	76	80		
			450	47	270	87	95		
			1100	1300 (TTI)	500	68	390		
	500	68			390	X	100		
	550	84			485	98	112		
	1000	1100	630	125	725	105	X	150kA @ 1000V	150kA @ 1100V
			630	125	725	X	120		
			700	180	1040	105	105		
	900	950	800	290	1540(*)	116	116	100kA @ 900V	100kA @ 950V
			800	850	900	446	2010(*)		

(¹) at 850 V

(²) does not exist with blades



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Main characteristics

PSC 650 to 1300VAC US and European standard

Size	Nominal Voltage U _N (VAC)		Ampere Rating (A)	Pre-arcing I _{pt} @ 1ms (kA _{2s})	Total I ² t @ 1000V (*) @ U _N (kA _{2s})	Power (W)		Tested Breaking capacity Estimated B.C 300 kA	
	IEC	UL				End contacts	Blades	IEC	USA
72	1250	1300	280	10	60	72	72	100kA @ 1250V	100kA @ 1300V
			315	15	87	76	76		
			350	21	120	77	77		
			400	32,5	190	80	80		
			450	44	255	87	89		
			500	57	330	94	98		
	550	68	390	110	120				
	630	105	610	113	X				
	1100	1200	630	105	610	X	125	150kA @ 1100V	150kA @ 1200V
			700	145	815	122	140		
			800	215	1240	125	146		
	1000	1100	700	145	815	X	140	150kA @ 1000V	150kA @ 1100V
800			215	1240	X	146			
900			312	1800	130	152			
850	900	1000	439	2150(*)	136	136	100kA @ 850V	100kA @ 900V	
73	1250	1300	315	12	68	84	84	100kA @ 1250V	100kA @ 1300V
			350	17	100	86	86		
			375	19	110				
			400	25	145	93	93		
			450	35,5	205	99	100		
			500	44	255	110	112		
			550	57	330	116	120		
			630	84	485	125	132		
			700	110	640	135	X		
			800	190	1090	136	X		
	1200	1300	700	110	640	X	146	100kA @ 1200V	100kA @ 1300V
			900	250	1090	150	X		
			800	190	1090	X	148	150kA @ 1100V	150kA @ 1200V
	1100	1200	900	250	1440	X	170	150kA @ 1000V	150kA @ 1100V
			1000	370	2130	152	168		
	1000	1100	1100	445	2555	168	208		
			950	445	2430(*)	168	X	150kA @ 950V	150kA @ 1000V
	900	1000	1000	370	1920(*)	X	174	150kA @ 900V	150kA @ 1000V
			1100	445	2280(*)	X	208		
			1250	585	3080(*)	186	X		
	1400	1000	1400	755	4100(*)	210	X		
850			755	3700(*)	210	X	150kA @ 850V	150kA @ 900V	
690	700	1500	1180	4750(*)	200	X	180kA @ 690V	180kA @ 700V	
		1600	1430	5740(*)	203	X			
600	650	1800	2040	7150(*)	206	X	120kA @ 600V	120kA @ 650V	
2 x 72	1250	1300	630	60	348	160		100kA @ 1250V	
			700	84	480	162			
			800	130	760	168			
			900	176	1020	183			
			1000	228	1320	197			
			1100	272	1560	231			
	1100	1200	1250	426	2440	237		100kA @ 1100V	
			1400	568	3260	256			
			1600	860	4895	262		100kA @ 1000V	
	1000	1100	1800	1250	6350(*)	275		100kA @ 900V	
			2000	1760	7570(*)	285		100kA @ 750V	
	900	1000	2200	2410	8350(*)	320		100kA @ 650V	
			2500	3470	12000(*)	340			
			800	100	580	195			
	2 x 73	1250	1300	900	142	820	208		100kA @ 1250V
1000				176	1000	231			
1100				228	1300	244			
1250				336	1900	262			
1400				440	2600	283			
1100		1200	1600	760	4400	286		100kA @ 1100V	
			1800	1000	5800	315			
			2000	1480	8500	319		120kA @ 1000V	
1000		1100	2200	1780	9632(*)	353		100kA @ 950V	
			2500	2340	12075(*)	390		110kA @ 900V	
900		1000	2800	3000	15000(*)	440		100kA @ 850V	
			3000	4980	15700(*)	405			
850		900	3200	5720	19030(*)	426		200kA @ 600V	
			3600	8160	25200(*)	430		200kA @ 550V	

(1) at 850 V

(2) does not exist with blades






Protistor® Square-body Fuses

PSC aR sizes 7x - 650 V to 1300 VAC

IEC Terminals - German 70 - 73 Blades (DIN 110)

Size	Designation	Reference Number	Weight (g)	Pack.	*I/In Base		Catalog Number
					F098031	L091941	
70	12,5 URD 70 D 11 A 0063	V300536	380	3	1	1	PC70UD13C63D1A
	12,5 URD 70 D 11 A 0080	W300537			1	1	PC70UD13C80D1A
	12,5 URD 70 D 11 A 0100	X300538			1	1	PC70UD13C100D1A
	12,5 URD 70 D 11 A 0125	Y300539			1	1	PC70UD13C125D1A
	12,5 URD 70 D 11 A 0160	Z300540			1	1	PC70UD13C160D1A
	12,5 URD 70 D 11 A 0200	A300541			1	1	PC70UD13C200D1A
	12,5 URD 70 D 11 A 0250	B300542			1	1	PC70UD13C250D1A
	12 URD 70 D 11 A 0280	J300710			1	1	PC70UD12C280D1A
	12 URD 70 D 11 A 0315	C300543			1	1	PC70UD12C315D1A
	11 URD 70 D 11 A 0350	D300544			1	1	PC70UD11C350D1A
71	12,5 URD 71 D 11 A 0160	D300751	570	3	1	1	PC71UD13C160D1A
	12,5 URD 71 D 11 A 0200	E300545			1	1	PC71UD13C200D1A
	12,5 URD 71 D 11 A 0250	F300546			1	1	PC71UD13C250D1A
	12,5 URD 71 D 11 A 0280	K300711			1	1	PC71UD12C280D1A
	12,5 URD 71 D 11 A 0315	G300547			1	1	PC71UD12C315D1A
	12,5 URD 71 D 11 A 0350	H300548			1	1	PC71UD13C350D1A
	12,5 URD 71 D 11 A 0400	J300549			1	1	PC71UD13C400D1A
	12,5 URD 71 D 11 A 0450	K300550			0,95	1	PC71UD13C450D1A
	11 URD 71 D 11 A 0500	L300551			0,95	1	PC71UD11C500D1A
	11 URD 71 D 11 A 0550	M300552			0,90	1	PC71UD13C550D1A
72	10 URD 71 D 11 A 0630	N300553	800	3	0,90	0,95	PC71UD10C630D1A
	12,5 URD 72 D 11 A 0280	P300554			1	1	PC72UD13C280D1A
	12,5 URD 72 D 11 A 0315	Q300555			1	1	PC72UD13C315D1A
	12,5 URD 72 D 11 A 0350	R300556			1	1	PC72UD13C350D1A
	12,5 URD 72 D 11 A 0400	S300557			1	1	PC72UD13C400D1A
	12,5 URD 72 D 11 A 0450	T300558			1	1	PC72UD13C450D1A
	12,5 URD 72 D 11 A 0500	V300559			0,95	1	PC72UD13C500D1A
	12,5 URD 72 D 11 A 0550	W300560			0,90	0,95	PC72UD13C550D1A
	11 URD 72 D 11 A 0630	X300561			0,90	0,95	PC72UD11C630D1A
	10 URD 72 D 11 A 0700	Y300562			0,85	0,90	PC72UD10C700D1A
73	10 URD 72 D 11 A 0800	Z300563	1150	3	0,85	0,90	PC72UD10C800D1A
	12,5 URD 73 D 11 A 0315	A300564			1	1	PC73UD13C315D1A
	12,5 URD 73 D 11 A 0350	B300565			1	1	PC73UD13C350D1A
	12,5 URD 73 D 11 A 0400	C300566			0,95	1	PC73UD13C400D1A
	12,5 URD 73 D 11 A 0450	D300567			0,95	1	PC73UD13C450D1A
	12,5 URD 73 D 11 A 0500	E300568			0,90	1	PC73UD13C500D1A
	12,5 URD 73 D 11 A 0550	F300569			0,90	0,95	PC73UD13C550D1A
	12,5 URD 73 D 11 A 0630	G300570			0,85	0,95	PC73UD13C630D1A
	12 URD 73 D 11 A 0700	H300571			0,85	0,90	PC73UD12C700D1A
	11 URD 73 D 11 A 0800	J300572			0,85	0,90	PC73UD11C800D1A
9	10 URD 73 D 11 A 0900	K300573			0,80	0,85	PC73UD10C900D1A
	9 URD 73 D 11 A 1000	L300574			0,80	0,85	PC73UD90V10CD1A
	9 URD 73 D 11 A 1100	M300575			0,75	0,80	PC73UD90V11CD1A

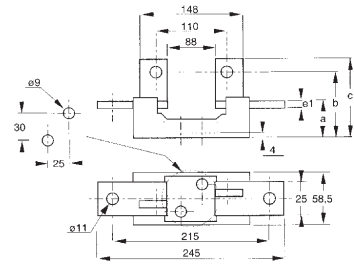

Pull out grip PM7
(V097676)
in size 70-71-72


Microswitches
supplied separately

	A	B	C	D	E±1,1	F	H	J	K	L±1,5	M	N	R	e
70	40	46,5	82	71	100,4	21	25	10,5	17,7	133,4	11,5	18,5	25,2	6
71	51	56,5	91	71	100,4	25,5	25	10,5	17,7	133,4	11,5	18,5	25,2	6
72	60	65,5	100	71	100,4	30	32	10,5	21,2	133,4	11,5	18,5	25,2	6
73	74,5	79,5	114	72	100,4	37,2	40	10,5	25,2	133,4	11	18	25,2	6

Fuse holders	Ref. N°	Cat. N°	a	b	c	e1	Weight (g)
SI DIN 110 630 A	F098031	SIDN110630A	40	68	82	5	1060
SI DIN 110 1250 A	L091941	SIDN1101250A	45	73	87	10	1320

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Multiplier coefficient

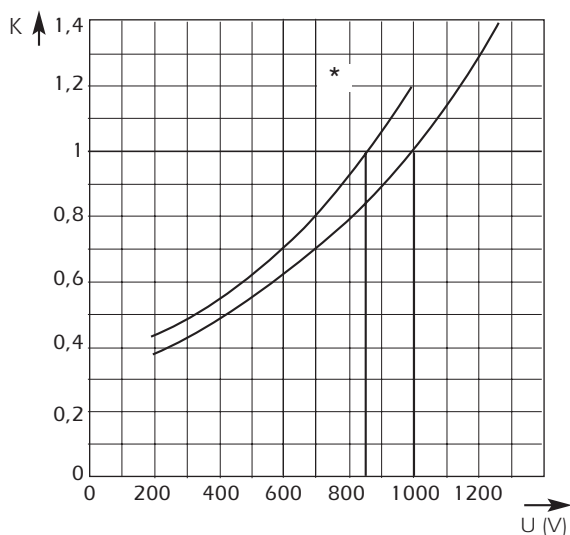

Left: Mean curve indicating variation of total I^2t (I^2t_t) and total operating time T_t in accordance with working voltage U .


Example:
Fuse 350 A in size 70.
 $I_p = 10\,000$ A $U = 1100$ V

At 1000 V
 $I^2t_t = 115\,000$ A²s $T_t = 7$ ms

At 1100 V
 $I^2t_t = 115\,000 \times 1.13 = 130\,000$ A²s
 $T_t = 7 \times 1.13 = 7.9$ ms


* curve for fuses with I^2t published at 850VAC

Dissipated power

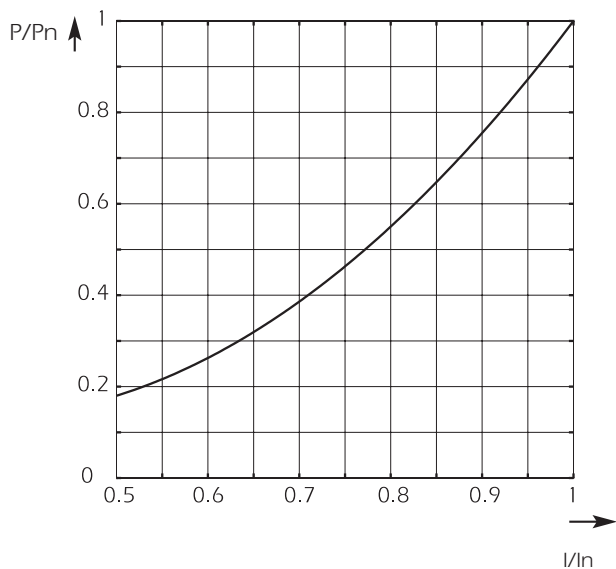

Above left: Curve enabling calculation of dissipated power P by a fuse rated I_n , as a function of the RMS current I , in multiples of I_n , in steady state.

Arc voltage

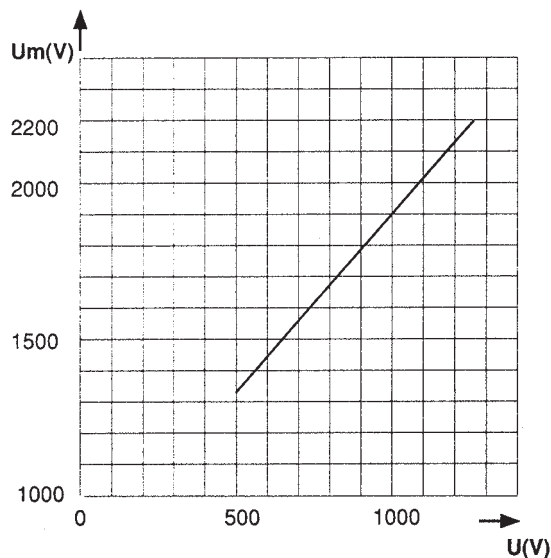

Above right: Curve indicating peak arc voltage U_m which may appear across fuse terminals as a function of working voltage U at $\cos \varphi = 0.15$




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 70

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

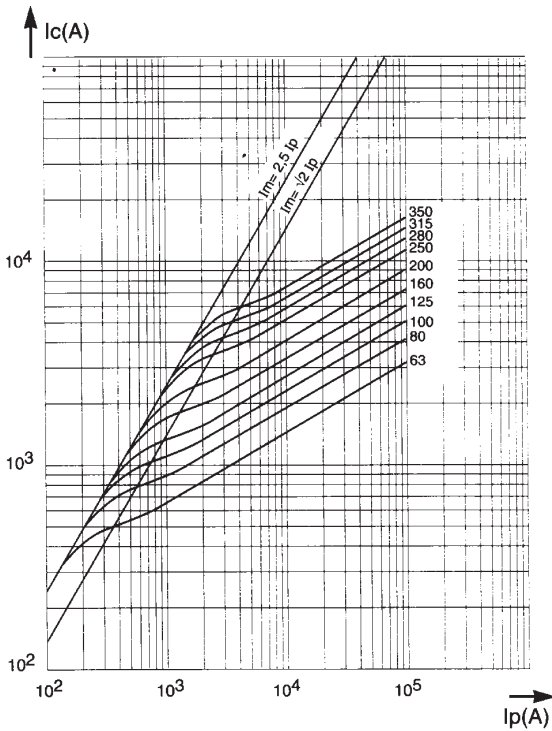

Time-current characteristics

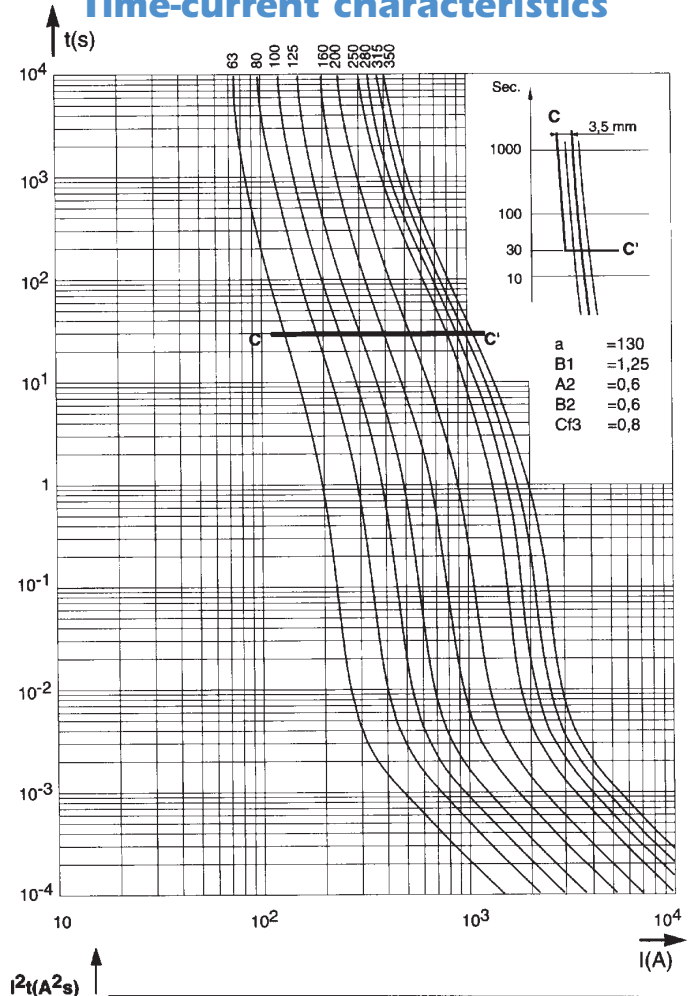


Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times


Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

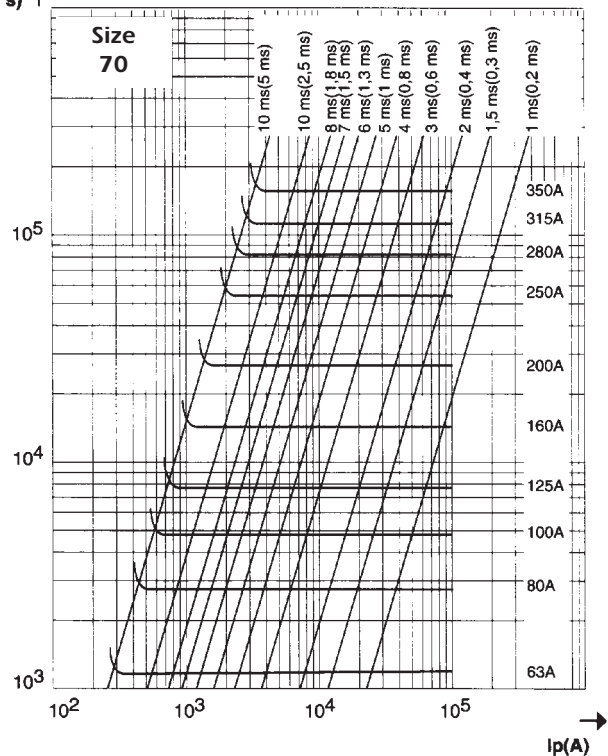

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

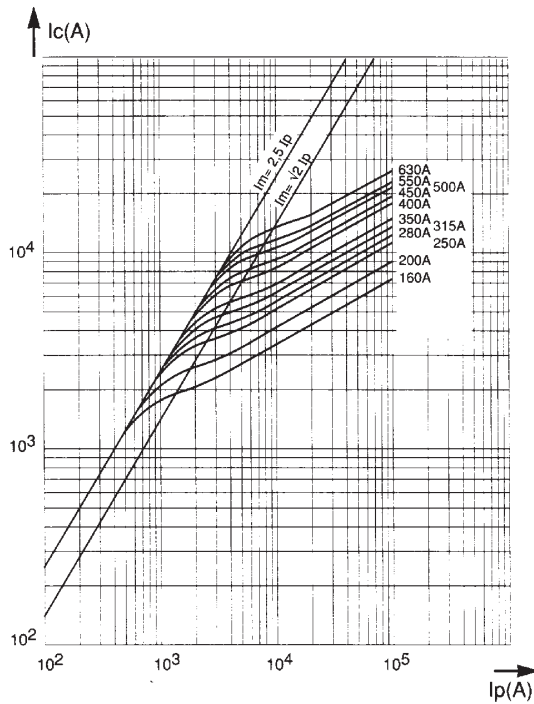

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

Size 71

Time-current characteristics

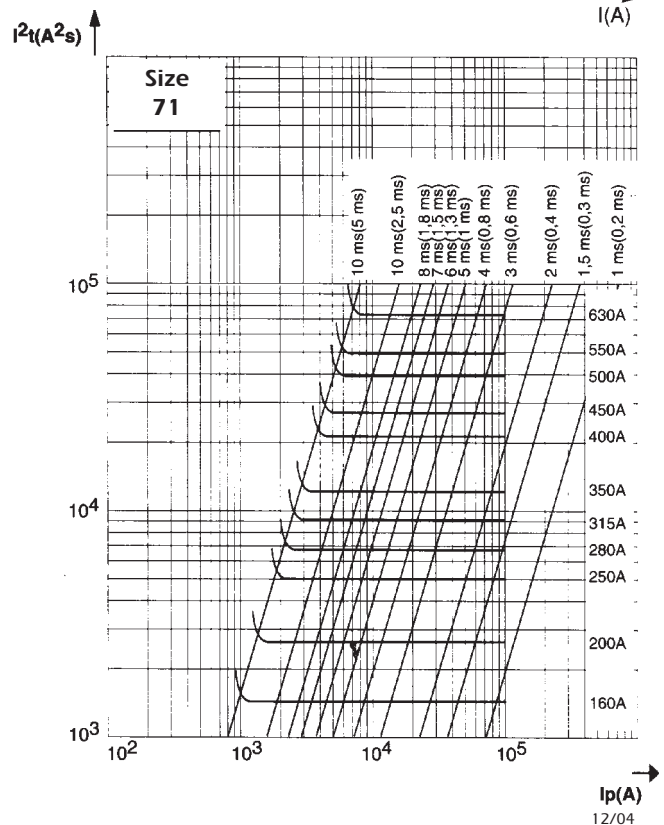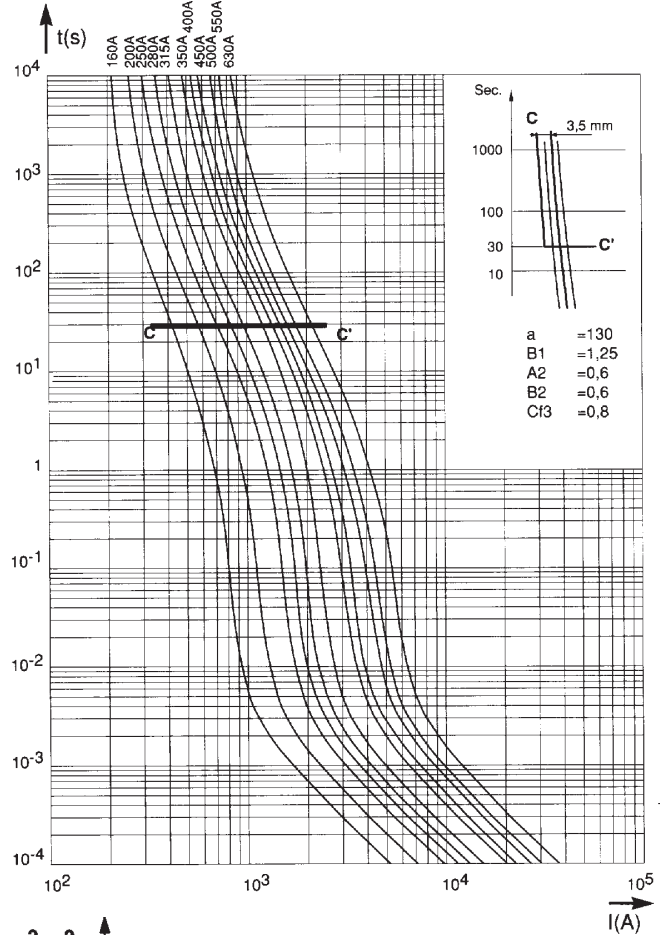




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 72

Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

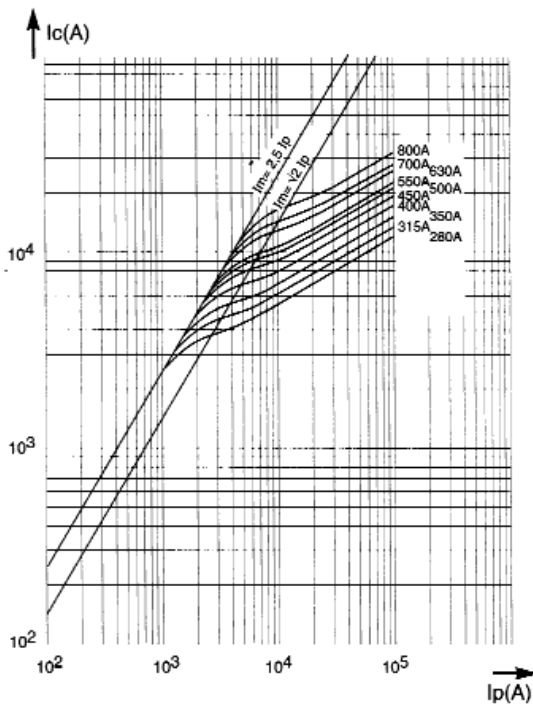

Time-current characteristics

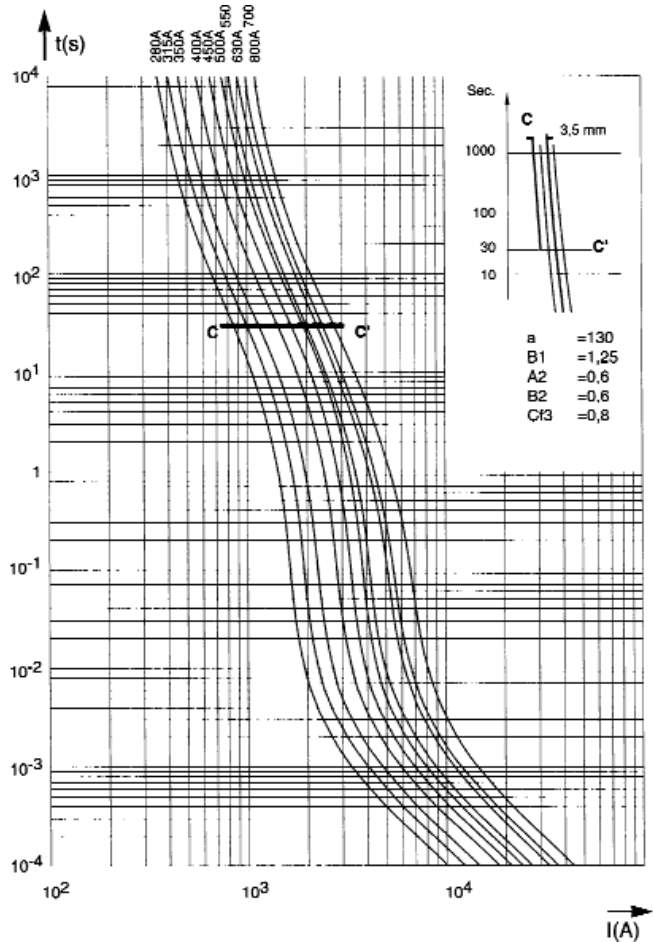

Time-current characteristics


Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

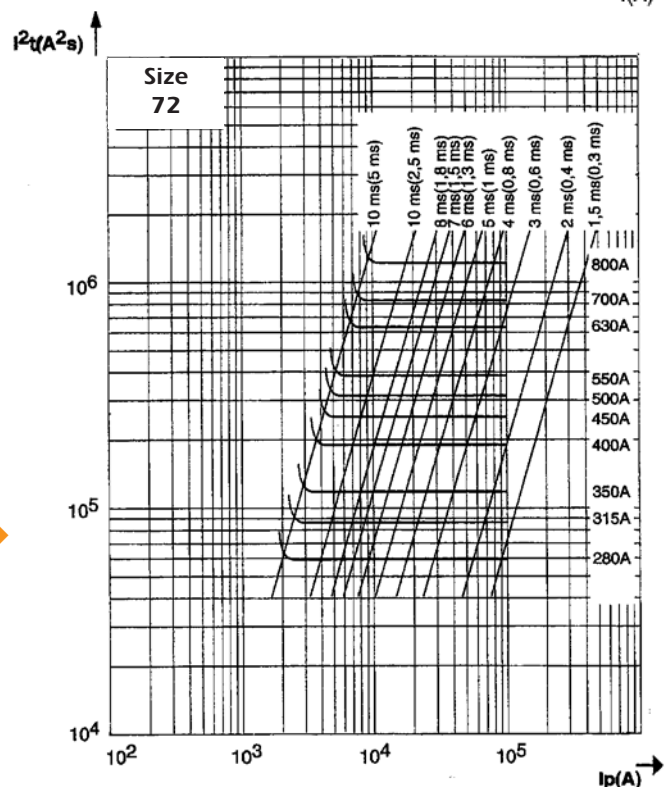


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 73

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

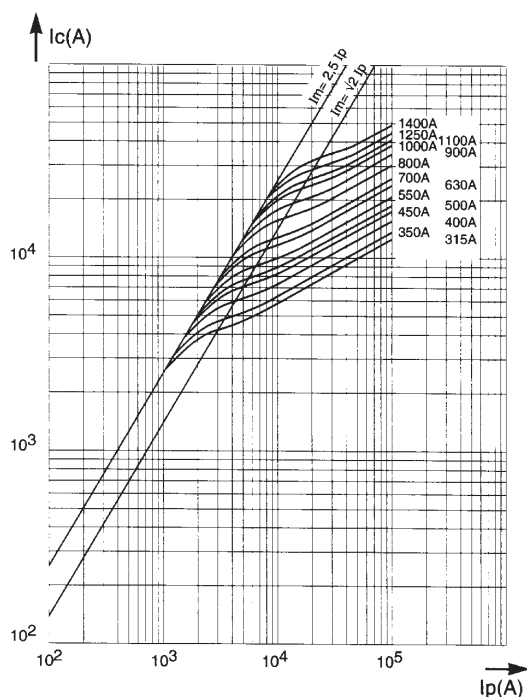

Time-current characteristics

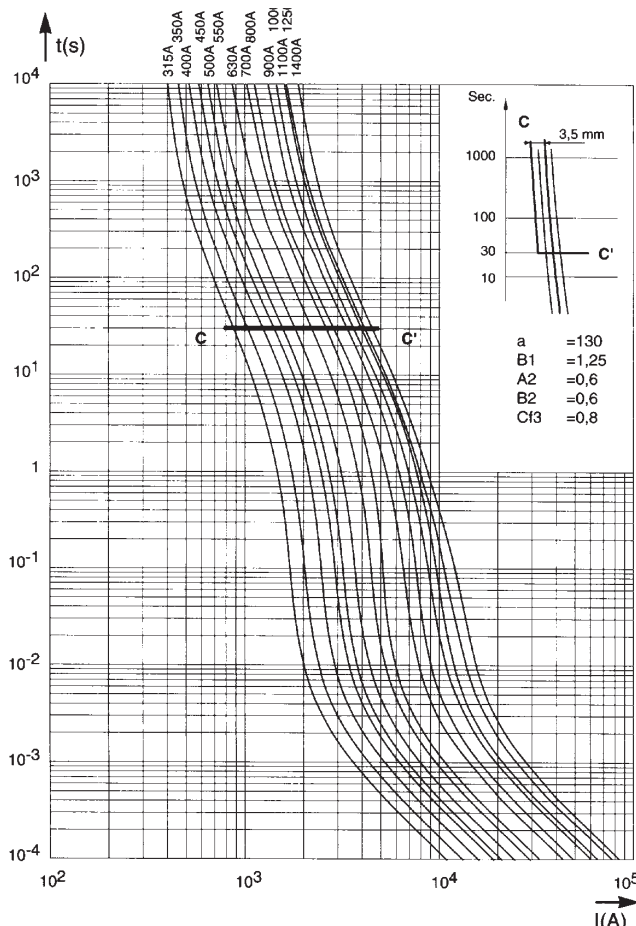

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

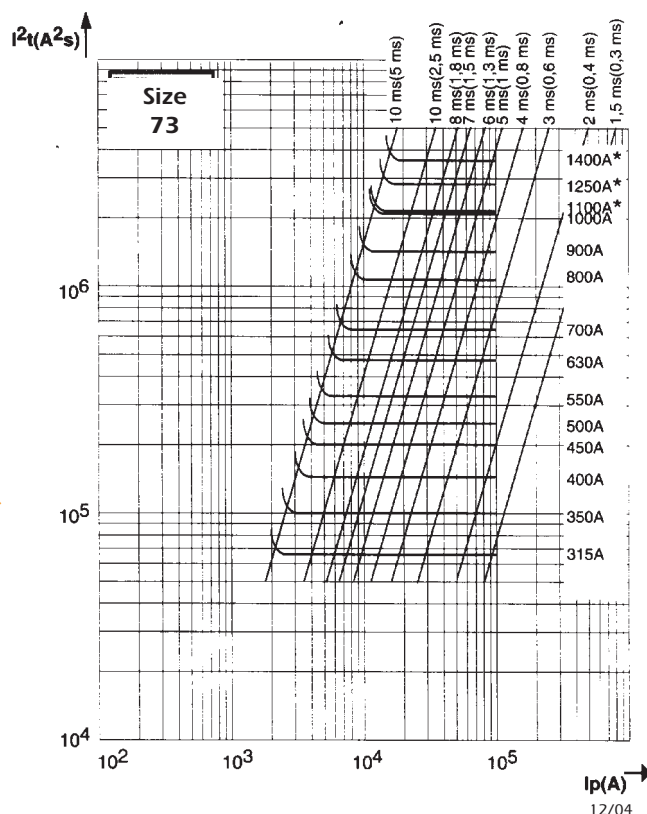




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

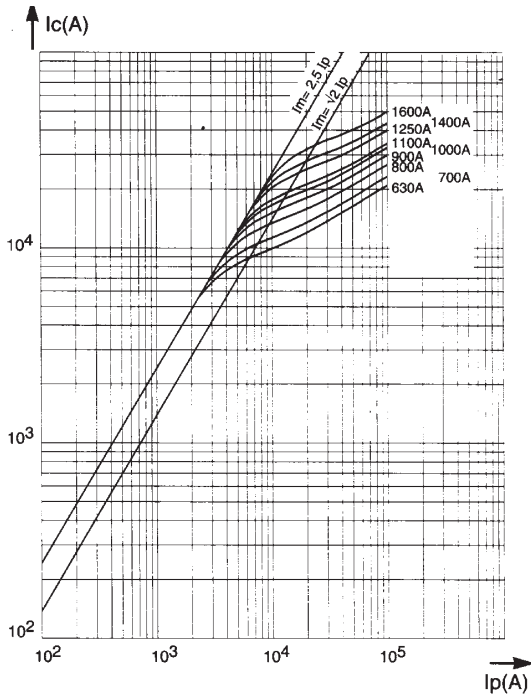

Time-current characteristics

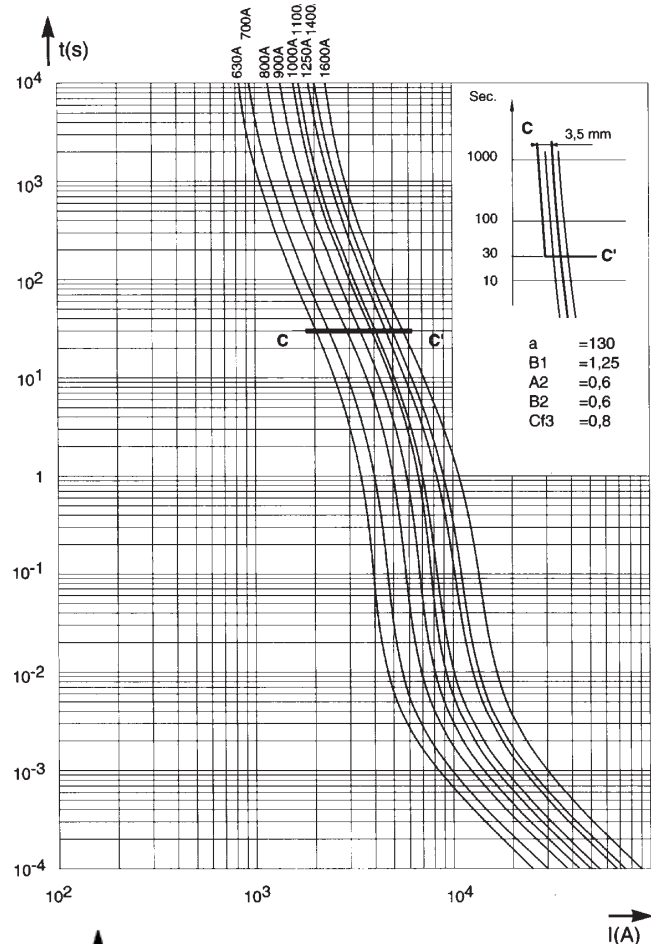

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

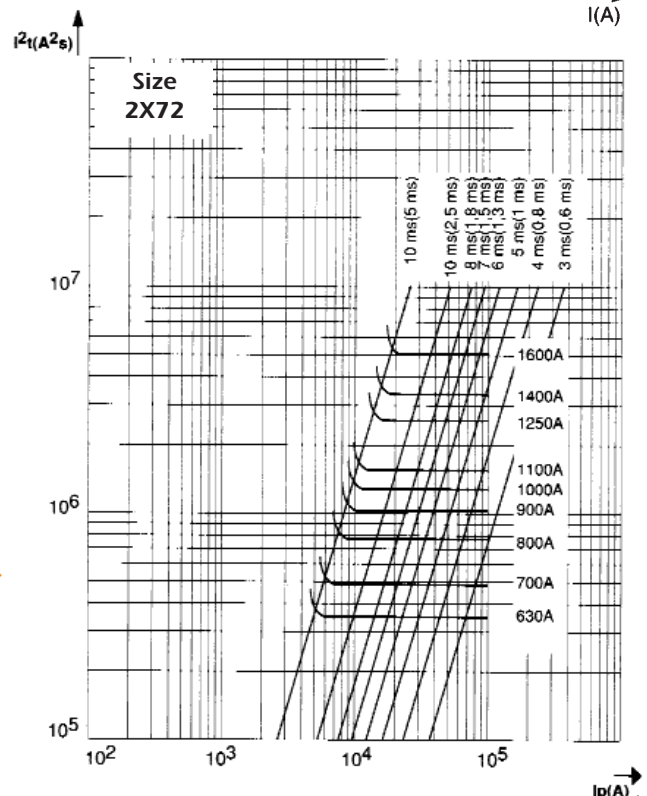


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

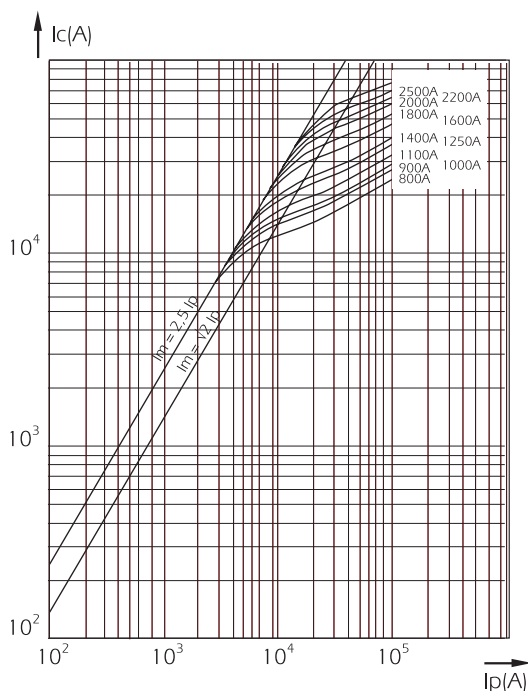

Time-current characteristics

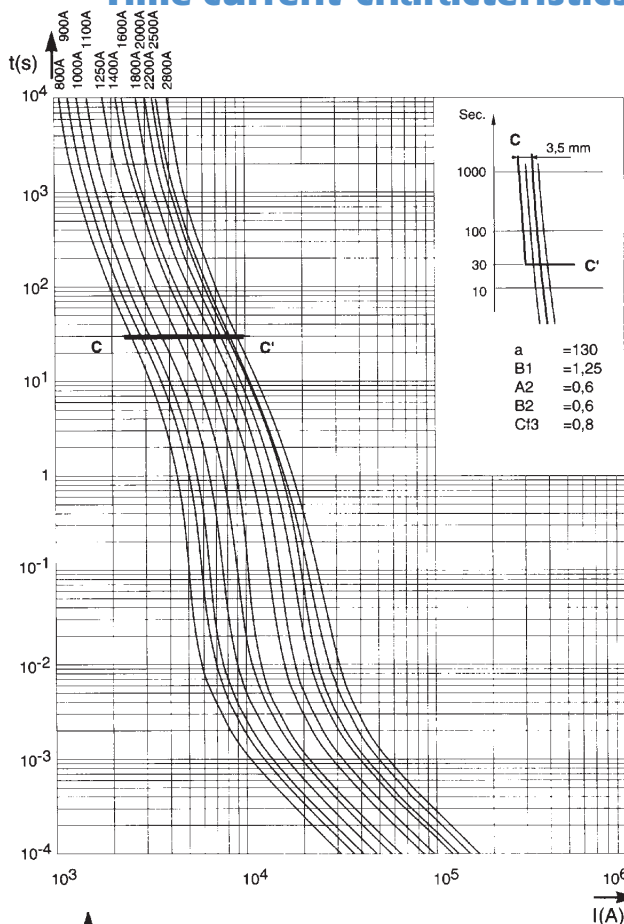

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.



The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

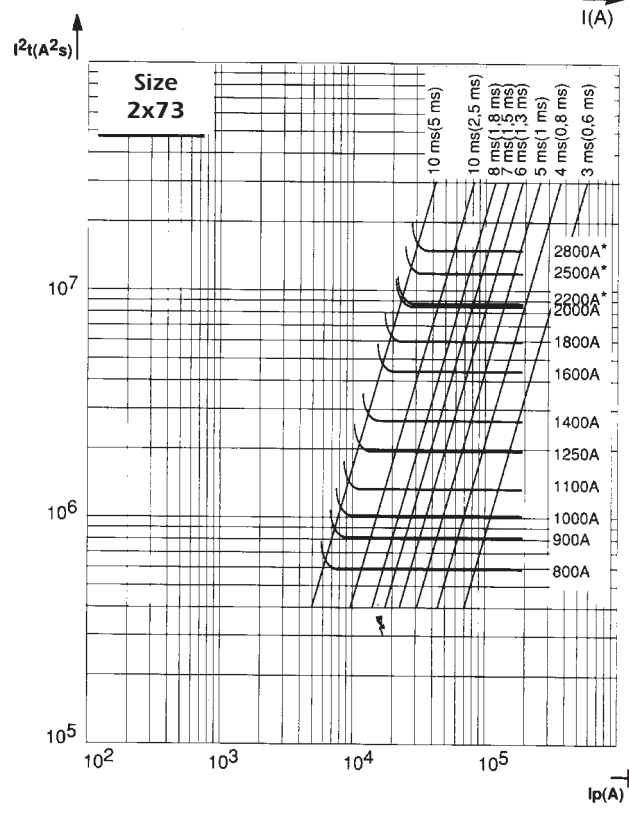



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

DC working voltage possibilities

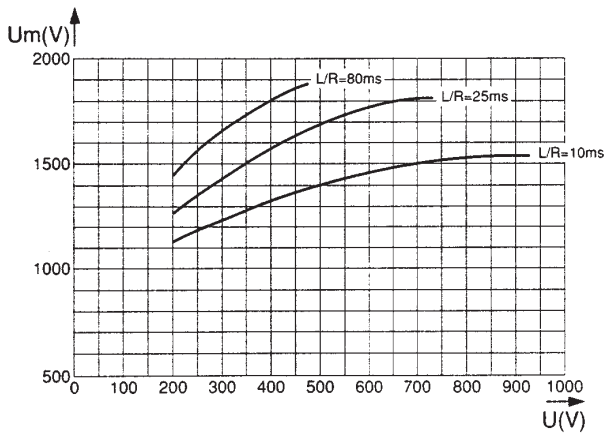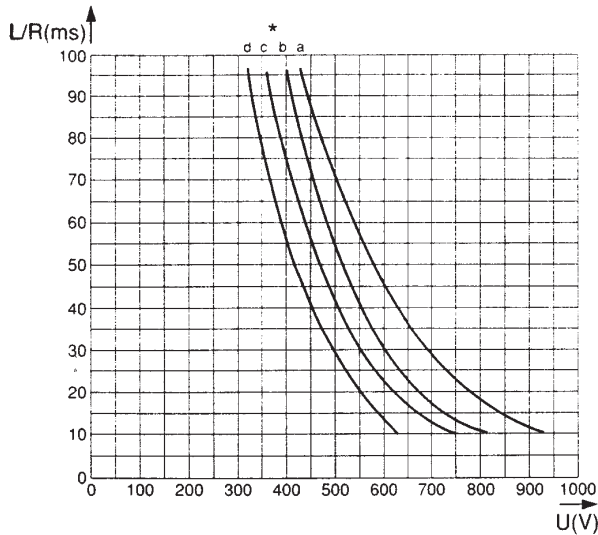

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents in the sizes indicated in the table.

I_{pm} (1) values indicate the minimum breaking current in Amperes (A).

Remark: When the fault current di/dt is very large, this condition can be exceeded. It is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Rated current I_N (A)	Curves (*) and I_{pm} (1) corresponding to the rating												
		70 * I_{pm} (A)	71 * I_{pm} (A)	72 * I_{pm} (A)	73 * I_{pm} (A)	2x72 * I_{pm} (A)	2x73 * I_{pm} (A)						
63	a	270											
80	a	400											
100	a	520											
125	a	700											
160	a	950	a	950									
200	a	1300	a	1300									
250	a	1800	a	1800									
280	b	2200	a	2000	a	1800							
315	b	2600	a	2300	a	2200	a	2000					
350	c	3000	a	2700	a	2600	a	2400					
400			b	3500	a	3200	a	3000					
450			b	4000	a	3800	a	3500					
500			c	4800	a	4600	a	3900					
550			c	5200	b	5000	a	4400					
630			c	6400	b	6200	a	5300	a	4400			
700					c	6800	a	6000	a	5200			
800						c	8000	b	8000	a	6400	a	6000
900								b	9000	a	7600	a	7000
1000								c	11000	a	9200	a	7800
1100								c	12000	b	10000	a	8800
1250								c	13500	b	12400	a	10600
1400								c	15000	c	13600	a	12000
1600										c	16000	b	16000
1800												b	18000
2000												c	22000
2200												c	24000
2500												d	27000
2800												d	30000

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.

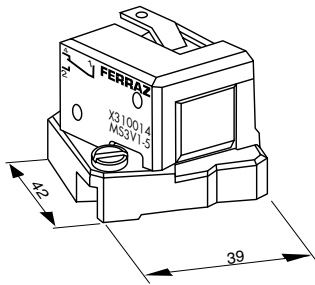

(fig. 1)

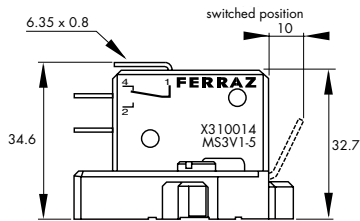


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

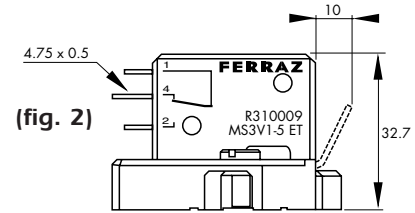


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

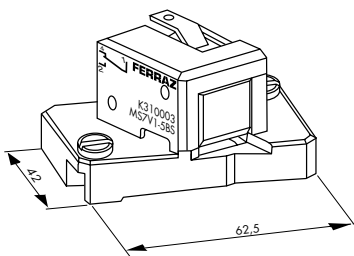

(fig. 5)

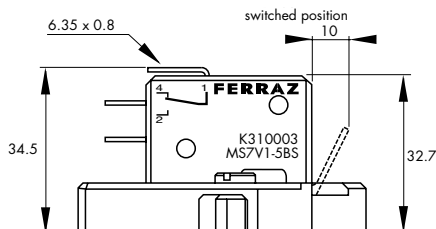


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

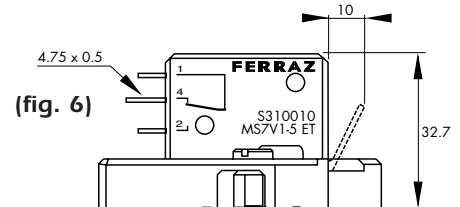

(fig. 6)

Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC gR sizes 7x - 690 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	Size 2 HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	Size 3 HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	Size 3 HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals


Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Multiplier coefficient

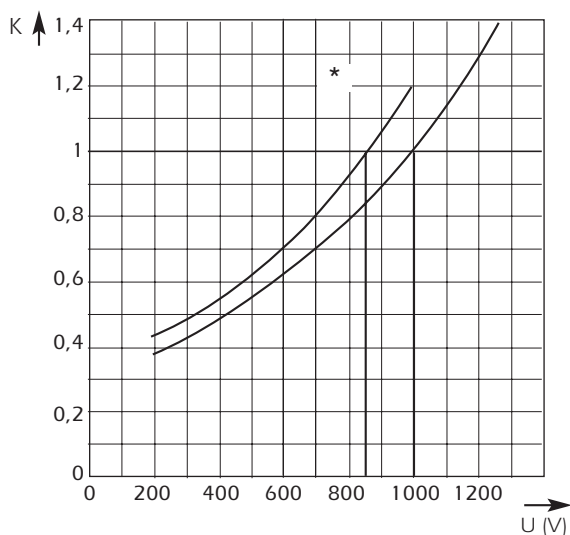

Left: Mean curve indicating variation of total I^2t (I^2t_t) and total operating time T_t in accordance with working voltage U .


Example:
Fuse 350 A in size 70.
 $I_p = 10\ 000\ A$ $U = 1100\ V$

At 1000 V
 $I^2t_t = 115\ 000\ A^2s$ $T_t = 7\ ms$

At 1100 V
 $I^2t_t = 115\ 000 \times 1.13 = 130\ 000\ A^2s$
 $T_t = 7 \times 1.13 = 7.9\ ms$


* curve for fuses with I^2t published at 850VAC

Dissipated power

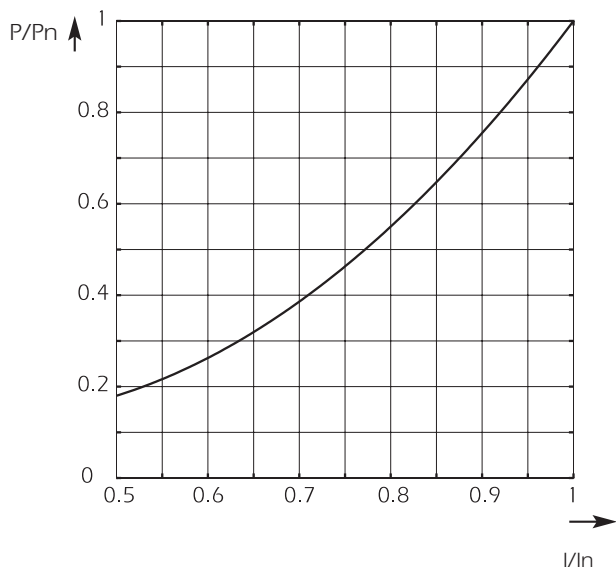

Above left: Curve enabling calculation of dissipated power P by a fuse rated I_{Nr} as a function of the RMS current I , in multiples of I_{Nr} , in steady state.

Arc voltage

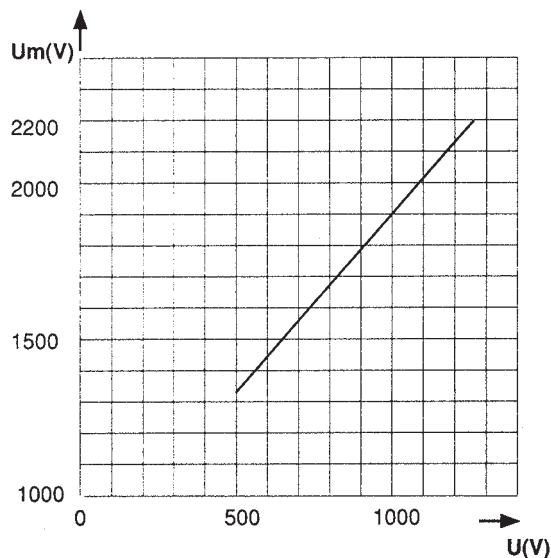

Above right: Curve indicating peak arc voltage U_m which may appear across fuse terminals as a function of working voltage U at $\cos \varphi = 0.15$




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 70

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

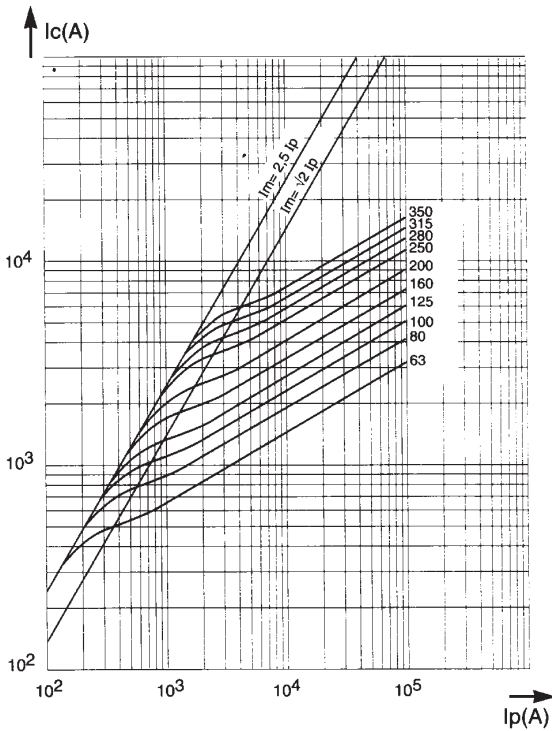

Time-current characteristics

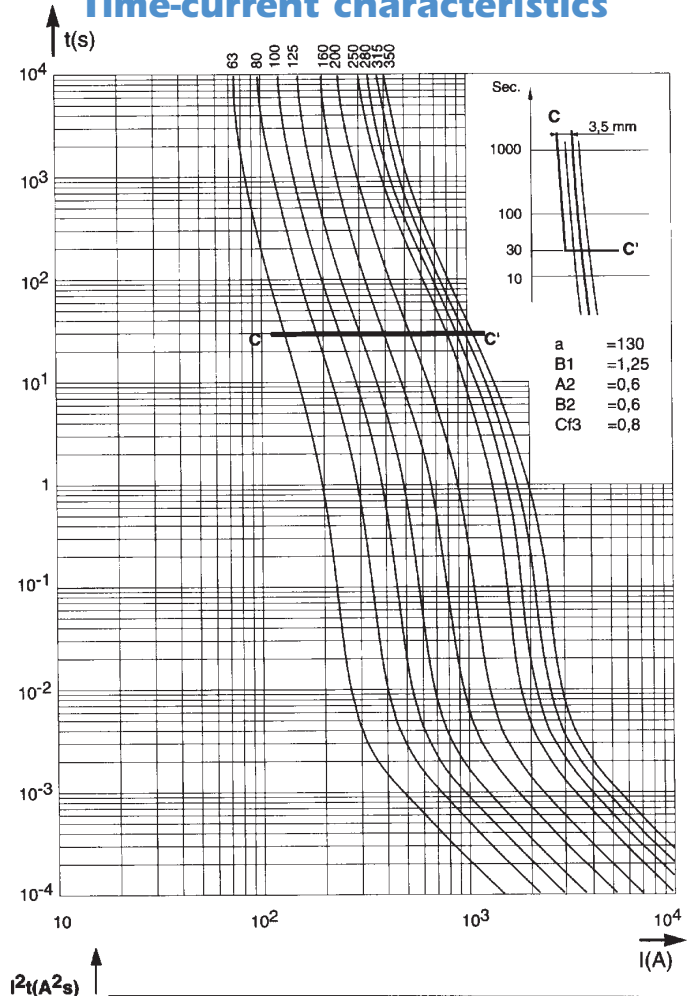


Time-current characteristics

- Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .
- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times


Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.
The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

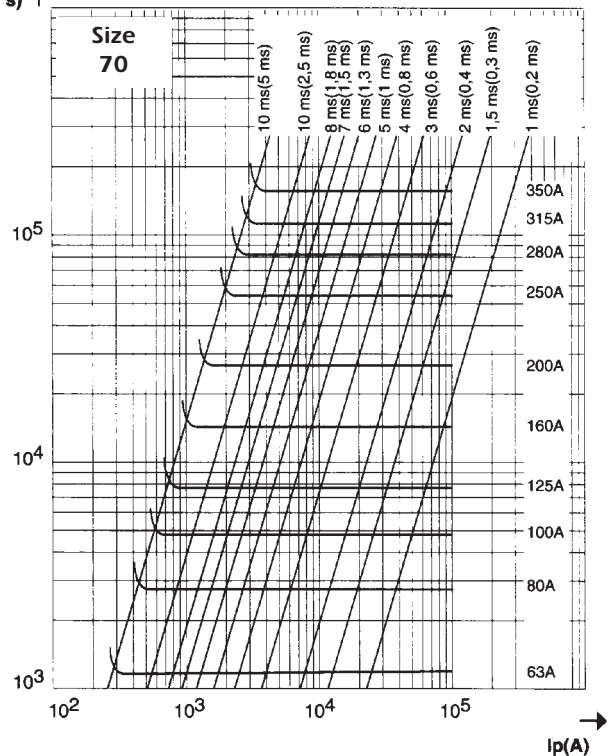

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

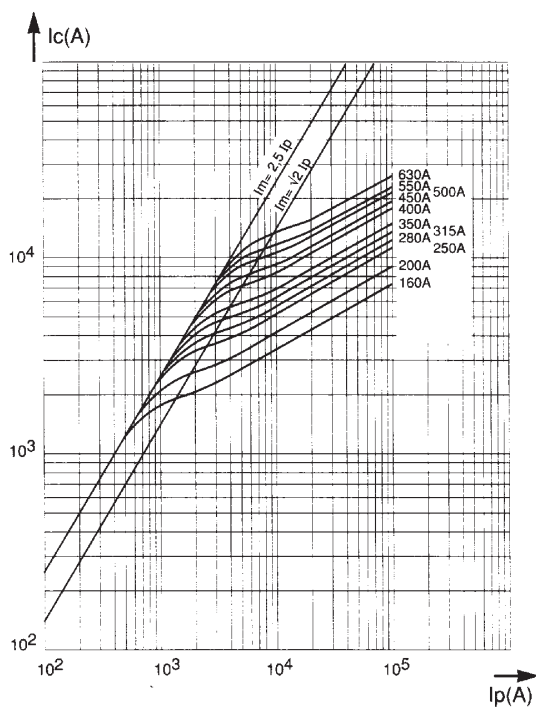

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

Size 71

Time-current characteristics

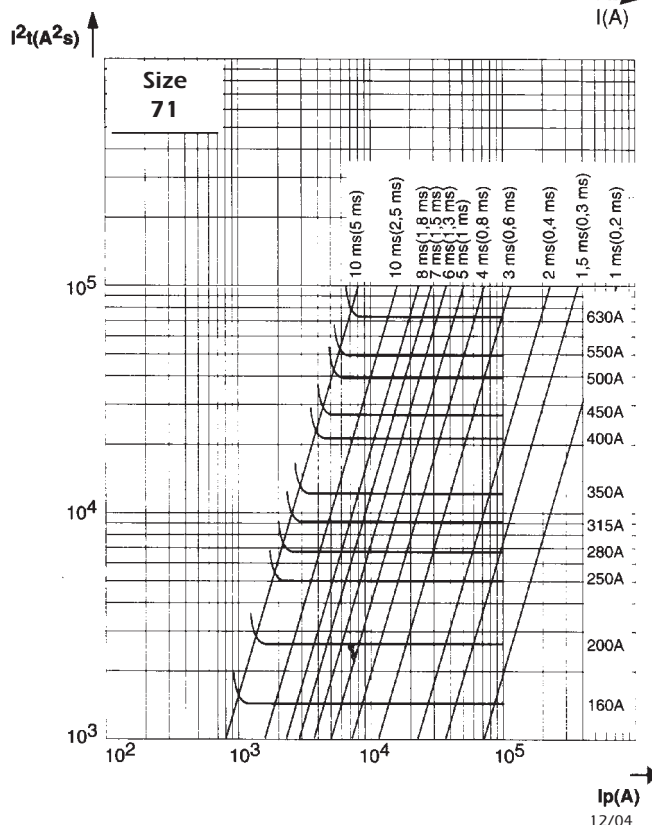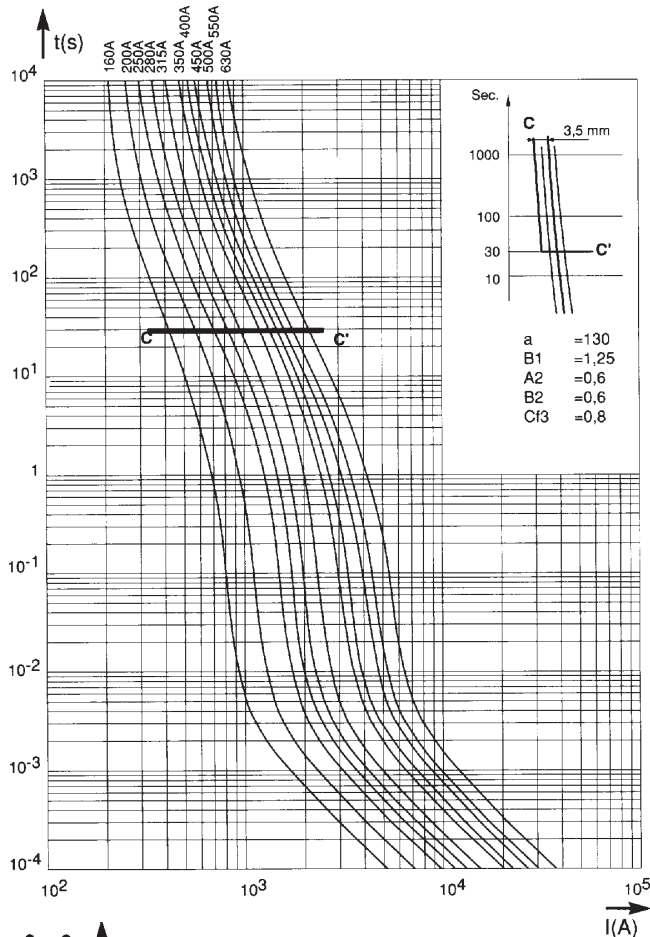




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 72

Cut-off characteristics

Below, right: Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

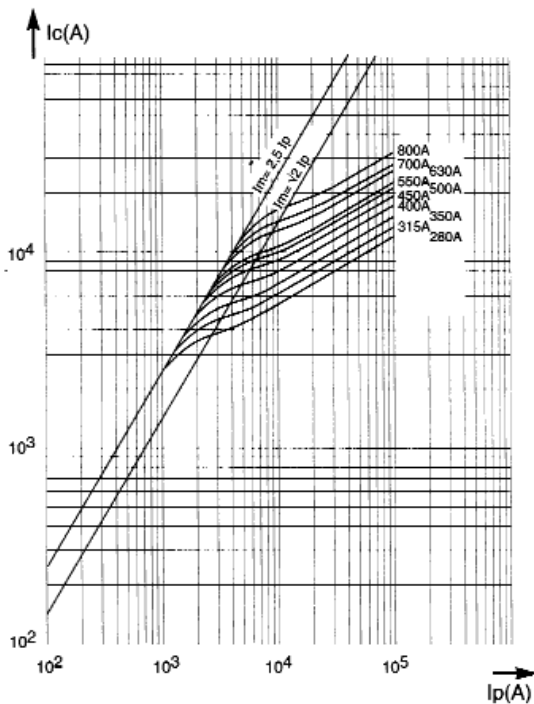

Time-current characteristics

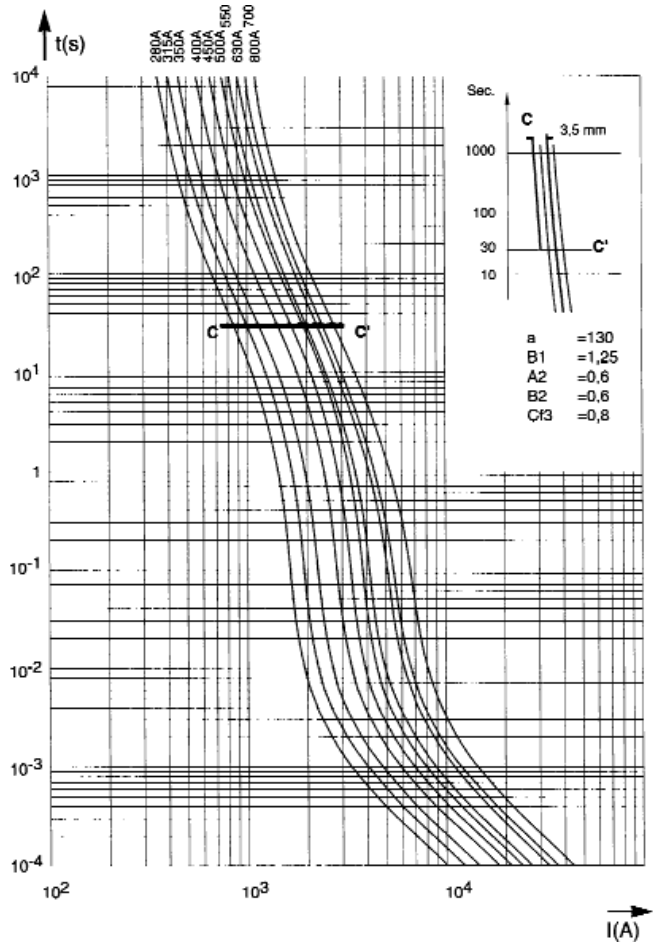

Time-current characteristics


Above, left: Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Left: Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

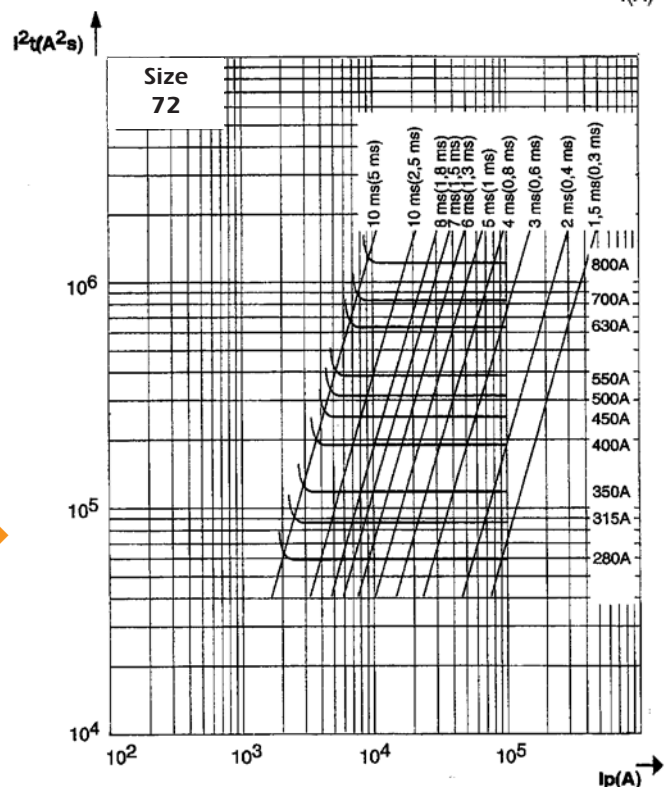


Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 73

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

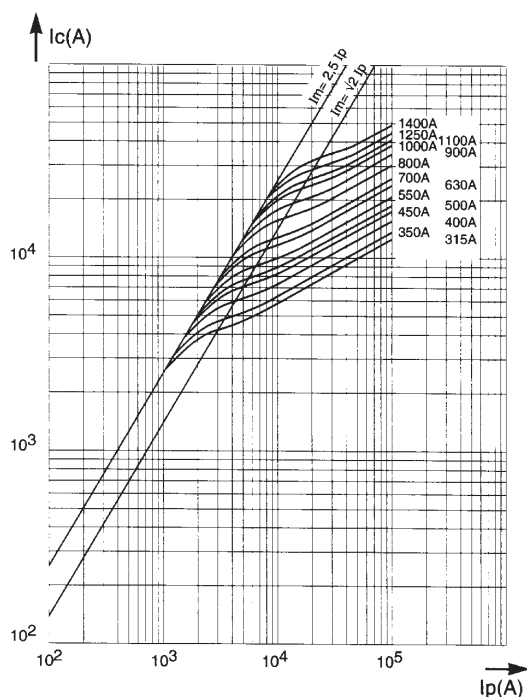

Time-current characteristics

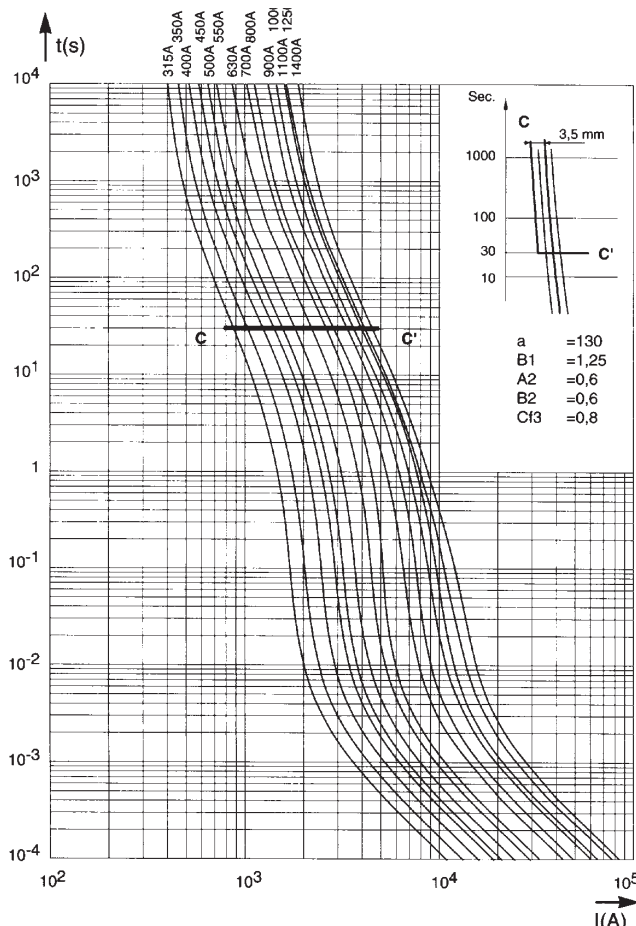

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t with pre-arcing time in brackets.

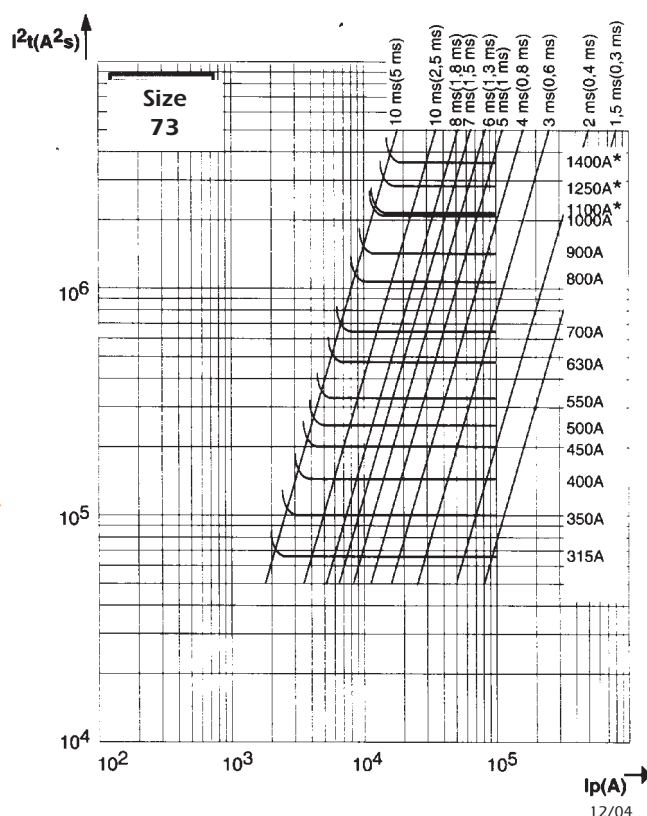




Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set


Size 2x72

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

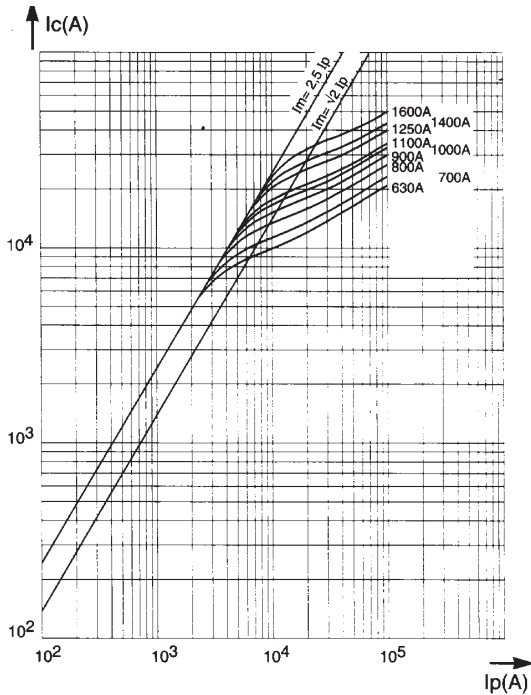

Time-current characteristics

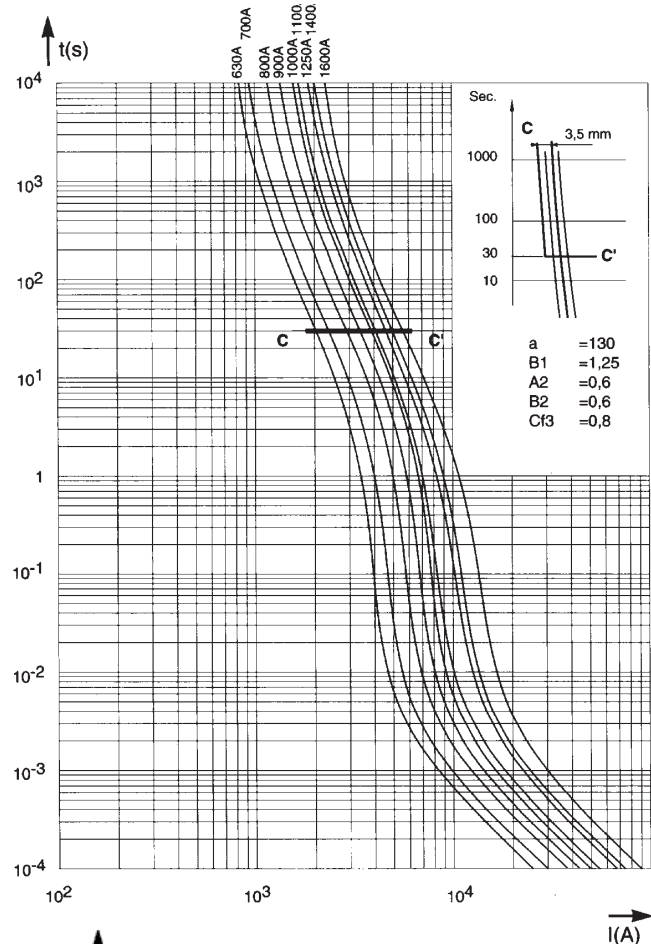

Time-current characteristics


Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.

Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.


The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

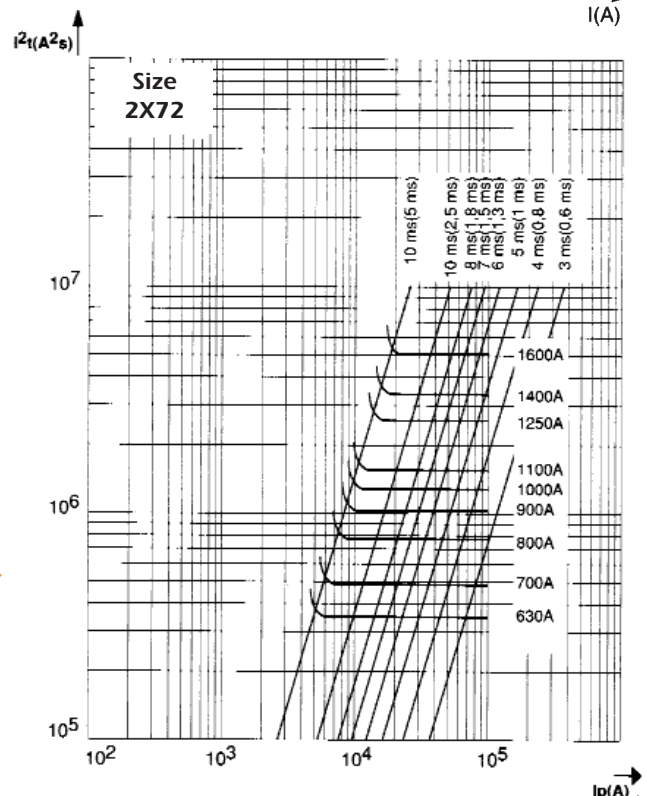

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

Cut-off characteristics

Curves indicating for each rated current the peak value I_C that the current may reach as a function of the prospective fault current I_p .

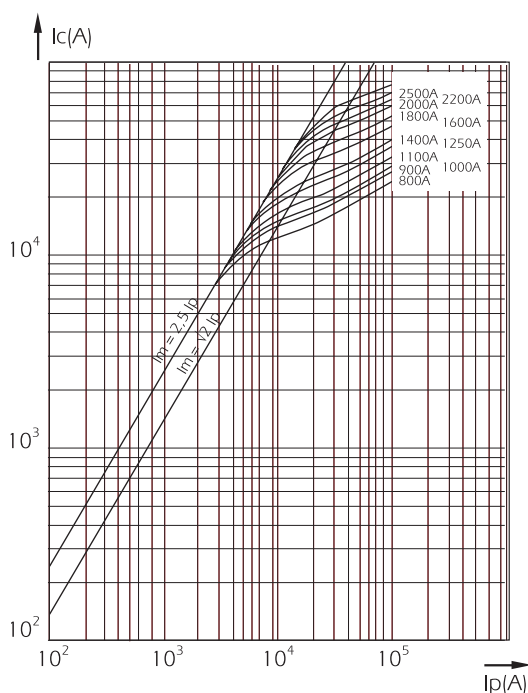

Time-current characteristics

Curves indicating pre-arcing time for each rated current as a function of RMS value of pre-arcing current I .

- Tolerances on this current $\pm 8\%$.
- Beyond 30 sec, small overloads must be eliminated by another device.
- Curve CC' represents the maximum times taken by the associated device to clear small overloads; only its horizontal line is represented. Its oblique line must be plotted according to sketch, top right corner.
- The intersection of the fuse and CC' curves indicates the minimum breaking current I_{pm} of the fuse.



Maximum values of total operating I^2t and total operating times

Horizontal curves indicating the maximum values of total operating I^2t (I^2t_t) as function of the prospective current I_p at 1000V or 850 V(*), $\cos \varphi = 0.15$.

The oblique lines indicate the corresponding total operating time T_t , with pre-arcing time in brackets.

Size 2x72



Time-current characteristics

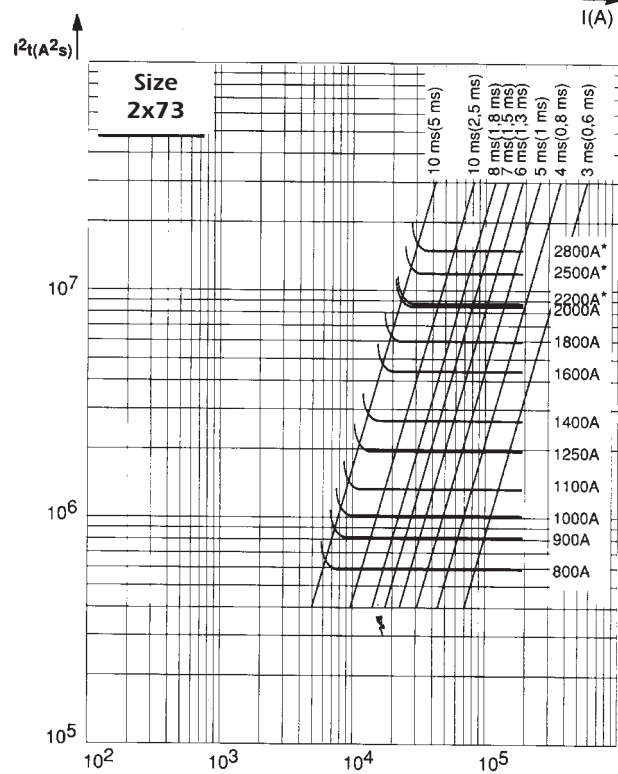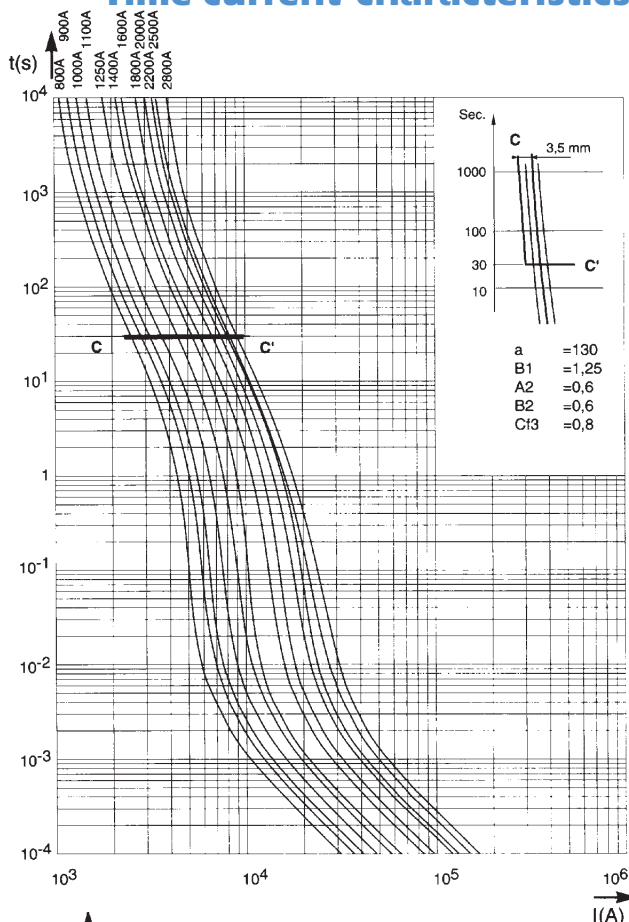



Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Curves set

DC working voltage possibilities

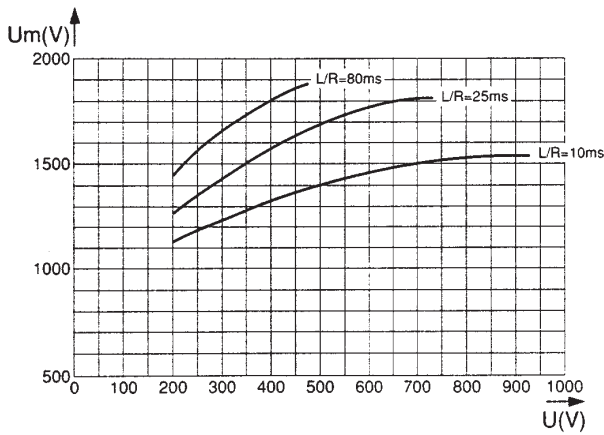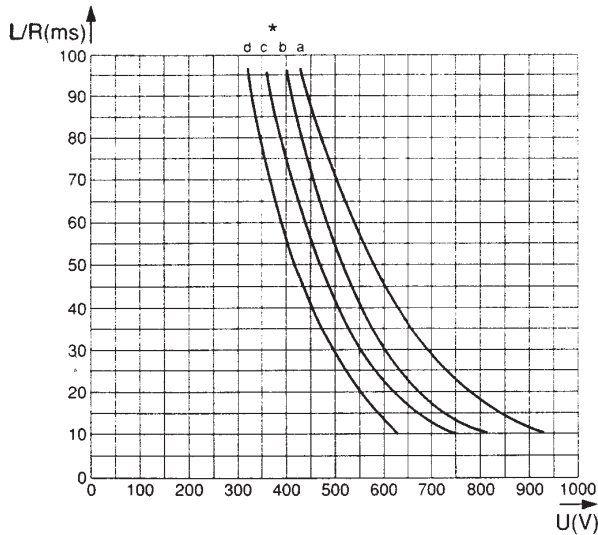

Top: Curves indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents in the sizes indicated in the table.

I_{pm} (1) values indicate the minimum breaking current in Amperes (A).

Remark: When the fault current di/dt is very large, this condition can be exceeded. It is the case for faults occurring in voltage commutated inverters.

Below: Curves indicating peak arc voltage U_m which may appear across fuse terminals as a function of the DC working voltage U , for various time constant L/R of fault path.

Rated current I_N (A)	Curves (*) and I_{pm} (1) corresponding to the rating												
		70 * I_{pm} (A)	71 * I_{pm} (A)	72 * I_{pm} (A)	73 * I_{pm} (A)	2x72 * I_{pm} (A)	2x73 * I_{pm} (A)						
63	a	270											
80	a	400											
100	a	520											
125	a	700											
160	a	950	a	950									
200	a	1300	a	1300									
250	a	1800	a	1800									
280	b	2200	a	2000	a	1800							
315	b	2600	a	2300	a	2200	a	2000					
350	c	3000	a	2700	a	2600	a	2400					
400			b	3500	a	3200	a	3000					
450			b	4000	a	3800	a	3500					
500			c	4800	a	4600	a	3900					
550			c	5200	b	5000	a	4400					
630			c	6400	b	6200	a	5300	a	4400			
700					c	6800	a	6000	a	5200			
800						c	8000	b	8000	a	6400	a	6000
900								b	9000	a	7600	a	7000
1000								c	11000	a	9200	a	7800
1100								c	12000	b	10000	a	8800
1250								c	13500	b	12400	a	10600
1400								c	15000	c	13600	a	12000
1600										c	16000	b	16000
1800												b	18000
2000												c	22000
2200												c	24000
2500												d	27000
2800												d	30000

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches PSC 3x & 7x

- MICROSWITCH SYSTEMS ADAPTED

TO THE FOLLOWING FERRAZ SHAWMUT FUSES ONLY:

- PSC sizes 30, 31, 32, 33, 2x32, 2x33 / 70, 71, 72, 73, 272, 273
except plain blades

- PSC LR sizes 33, 233, 73, 273

- PERMANENT INDICATION OF FUSE STATE: CONDUCTIVE
BLOWN

- MANUAL RESETTING

- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS

- BS TYPE FOR USE IN CORROSIVE ATMOSPHERE

- MS 3V 1-5 UR AND MS 7V 1-5 UR TYPE UL ARE RECOGNIZED



MS 7V 1-5

Main Characteristics

Code	AC Insulation voltage rating (***)	Positive operating voltage/current	Current rating	Current	Breaking Capacity						AC voltage withstand test (*)	Impulse voltage test Uimp1.2/50 µs (**)	Fire class according to UL 94
					Non inductive circuit			Inductive circuit : L/R = 25ms					
					30V	110V	250V	30V	110V	250V			
MS 3V 1-5	1000 V	20 V 50 mA	10 A	50/60 Hz	10 A	10 A	10 A	10 A	10 A	10 A	8,5 kV	14 kV	H.B
MS 3V 1-5 UR				DC	8 A	0,4 A	0,2 A	4 A	0,2 A	0,1 A			
MS 7V 1-5	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 UR				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 3V 1-5 BS	1000 V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 3V 1-9 BS				DC	3 A	0,5 A	0,25 A	3 A	0,2 A	0,1 A			
MS 7V 1-5 BS	1500V	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-9 BS				DC	3 A	0,5 A	-	2 A	0,2 A	-			
MS 3V 1-5 ET	1000V	10 V	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	8,5 kV	14 kV	
MS 7V 1-5 ET	1500V	10 mA	3 A	DC	3 A	0,5 A	-	2 A	0,2 A	-	12 kV	20 kV	

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air)

** Between power circuit and microswitch terminals Uimp: impulse voltage as per IEC 60947-1

*** Between power circuit and microswitch terminals


Warning: microswitch systems exclusively designed for FERRAZ SHAWMUT.
PSC Fuses fitted a patented trip-indicator, saving use of EDV




Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Microswitches for PSC 3x & 7x

Indication systems for PSC Fuse sizes 30 to 73 MS 3V...

These patented indication systems are exclusively hand resettable.



(fig. 1)

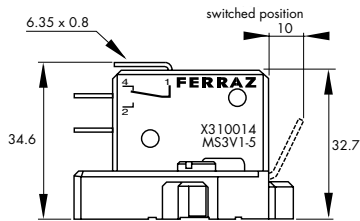


Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
30, 31 32, 33	MS 3V 1-5 (fig.1)	X310014	Standard NO-NC	34	3 pieces	MS3 V1-5
	MS 3V 1-5 UR	Y310038				MS3 V1-5UR
	MS 3V 1-5 BS (3)	K310013	Low level NO-NC	34	3 pieces	MS3-V1-5BS
	MS 3V 1-9 BS (4)	P310011	Double pole Low level	44	3 pieces	MS3V1-9BS
	MS 3V 1-5 ET (fig.2)	S310009	Low level NO-NC IP 50 (9)	34	3 pieces	MS3V1-5 ETANCHE

(3) Same as fig.1

(4) Same dimensions as figure 1 but with 2 microswitches side by side


(9) Watertightness class

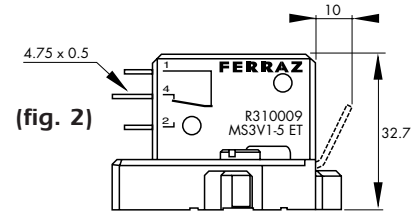


(fig. 2)

MS 7V...

Fuse size	Designation	Ref. Number	Indication style	Weight (g)	Pack.	Catalog Number
70, 71 72, 73	MS 7V 1-5 (fig.5)	J310002	Standard NO-NC	45	3 pieces	MS7 V1-5
	MS 7V 1-5 UR	Z310039				MS7 V1-5UR
	MS 7V 1-5 BS (3)	K310003	Low level NO-NC	45	3 pieces	MS7-V1-5BS
	MS 7V 1-9 BS (4)	P310007	Double pole Low level	55	3 pieces	MS7V1-9BS
	MS 7V 1-5 ET (fig.6)	S310010	Low level NO-NC IP 50 (9)	55	3 pieces	MS7V1-5 ETANCHE

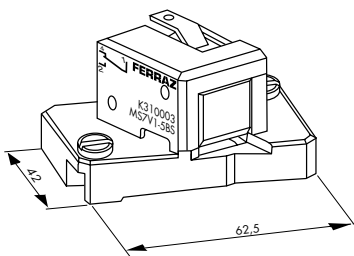

(fig. 5)

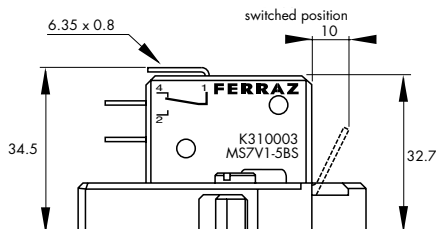


(7) Same as fig. 5

(8) Same dimensions as figure 5 but with 2 microswitches side by side

(9) Watertightness class

Warning: Microswitch systems exclusively designed for FERRAZ SHAWMUT PSC fuses fitted with a patented trip-indicator, saving use of EDV.

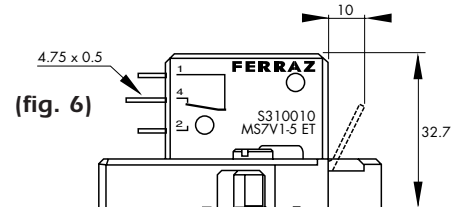



(fig. 6)

Protistor® Square-body Fuses PSC aR sizes 7x - 650 V to 1300 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics



Ferraz Shawmut 1500 V PSC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. These square body fuse-links are available in three different body sizes, each size having four world-wide acceptable mounting styles. The different mounting styles and body sizes along with a broad range of ampere ratings allow greatest flexibility in equipment design.

The Ferraz Shawmut PSC fuses have been engineered to provide state-of-the-art protection for SCRs, diodes, thyristors, GTO's and IGBT devices. They have pure silver die-cut elements embedded in solidified sand which helps control arcing characteristics for low I^2t and high breaking capacity. All contact surfaces are silver plated and all hardware is non-magnetic.

All fuse links are equipped with a low voltage trip-indicator. This trip-indicator can operate a field mountable microswitch which is easily mounted directly on to the fuse even while in service.

Highlights

- Extremely Fast Acting
- Current Limiting
- Very Low I^2t
- Worldwide Acceptability
- Superior Cycling Ability

Ratings

AC: 100 - 1500A
1500 VAC
200 KA IR

DC: Consult us

Approvals

C: Tested to IEC 60269.4 at UN +10 %

Features/Benefits

Choice of mounting styles gives wide choice for equipment design

Broad range of ampere ratings in a given body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications

Applications

Protection of rectifiers, inverters, DC drives, UPS Systems, reduced voltage motor starters, and other equipment in globally accepted applications



Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics

Voltage (V)	Size	Type	Rating (A)	Maximum I ² t under 1500V (kA ² S)	Power losses in watts				Breaking capacities kA
					End contacts 0,8 In In		Blades 0,8 In In		
1 500 V	91	URF	100	10	18,5	35	18,5	35	1 500 V 200 kA
		URF	125	15	23	43	23	43	
		URF	160	24,5	29	55	29	55	
		URF	180	32,5	33	62	33	63	
		URG	200	50	27,5	52	28	53,5	
		URK	225	78	31	58,5	31	59	
		URH	250	246	25	47	25	47	
		URH	315	384	31	59	31	59	
	URH	350	466	35	66	35	66		
	92	URF	200	40	36,5	69	37,5	71	
		URG	250	84	37,5	73	39	76	
		URK	315	144	46	91	46,5	95	
		URK	350	200	51	101	52	106	
		URH	400	669	41,5	83	44	90	
		URH	500	983	50,5	101	53,5	109	
	93	URH	550	1 190	57,5	115	61	124	
		URF	250	60	48	95	49,5	98	
		URF	315	94	61	120	62	123	
		URF	350	135	67	133	69	137	
		URG	375	185	62	125	64,5	130	
		URK	400	240	60	122	61,5	128	
		URK	450	305	67	137	69	144	
		URK	500	375	77	158	79	165	
		URH	630	1 570	62,5	125	67	136	
		URJ	700	2 500	67	131	73	143	
	2X92	URB	750	3 000	73	143	80	156	
		URG	500	335	77,5	152			
		URK	630	576	93	190			
		URK	700	800	104	212			
		URH	800	2 680	87	177			
		URH	1 000	3 930	106	216			
	2X93	URH	1 100	4 760	120	246			
		URG	750	740	129	260			
		URK	800	960	122	256			
		URK	900	1 220	138	288			
		URK	1 000	1 500	160	332			
		URH	1 250	6 280	131	268			
		URJ	1 400	10 000	143	280			
	URB	1 500	12 000	148	310				

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics



Ferraz Shawmut 1500 V PSC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. These square body fuse-links are available in three different body sizes, each size having four world-wide acceptable mounting styles. The different mounting styles and body sizes along with a broad range of ampere ratings allow greatest flexibility in equipment design.

The Ferraz Shawmut PSC fuses have been engineered to provide state-of-the-art protection for SCRs, diodes, thyristors, GTO's and IGBT devices. They have pure silver die-cut elements embedded in solidified sand which helps control arcing characteristics for low I^2t and high breaking capacity. All contact surfaces are silver plated and all hardware is non-magnetic.

All fuse links are equipped with a low voltage trip-indicator. This trip-indicator can operate a field mountable microswitch which is easily mounted directly on to the fuse even while in service.

Highlights

- Extremely Fast Acting
- Current Limiting
- Very Low I^2t
- Worldwide Acceptability
- Superior Cycling Ability

Ratings

AC: 100 - 1500A
1500 VAC
200 KA IR

DC: Consult us

Approvals

C: Tested to IEC 60269.4 at UN +10 %

Features/Benefits

Choice of mounting styles gives wide choice for equipment design

Broad range of ampere ratings in a given body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications

Applications

Protection of rectifiers, inverters, DC drives, UPS Systems, reduced voltage motor starters, and other equipment in globally accepted applications





Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics

Voltage (V)	Size	Type	Rating (A)	Maximum I ² t under 1500V (kA ² S)	Power losses in watts				Breaking capacities kA
					End contacts 0,8 In In		Blades 0,8 In In		
1 500 V	91	URF	100	10	18,5	35	18,5	35	1 500 V 200 kA
		URF	125	15	23	43	23	43	
		URF	160	24,5	29	55	29	55	
		URF	180	32,5	33	62	33	63	
		URG	200	50	27,5	52	28	53,5	
		URK	225	78	31	58,5	31	59	
		URH	250	246	25	47	25	47	
		URH	315	384	31	59	31	59	
	URH	350	466	35	66	35	66		
	92	URF	200	40	36,5	69	37,5	71	
		URG	250	84	37,5	73	39	76	
		URK	315	144	46	91	46,5	95	
		URK	350	200	51	101	52	106	
		URH	400	669	41,5	83	44	90	
		URH	500	983	50,5	101	53,5	109	
	93	URH	550	1 190	57,5	115	61	124	
		URF	250	60	48	95	49,5	98	
		URF	315	94	61	120	62	123	
		URF	350	135	67	133	69	137	
		URG	375	185	62	125	64,5	130	
		URK	400	240	60	122	61,5	128	
		URK	450	305	67	137	69	144	
		URK	500	375	77	158	79	165	
		URH	630	1 570	62,5	125	67	136	
		URJ	700	2 500	67	131	73	143	
	2X92	URB	750	3 000	73	143	80	156	
		URG	500	335	77,5	152			
		URK	630	576	93	190			
		URK	700	800	104	212			
		URH	800	2 680	87	177			
		URH	1 000	3 930	106	216			
	2X93	URH	1 100	4 760	120	246			
		URG	750	740	129	260			
		URK	800	960	122	256			
		URK	900	1 220	138	288			
		URK	1 000	1 500	160	332			
		URH	1 250	6 280	131	268			
		URJ	1 400	10 000	143	280			
	URB	1 500	12 000	148	310				

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC French End contacts

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
91	15 URF 91 TTF 0100	W 076 149	650	1	PC91UF15C100TF
	15 URF 91 TTF 0125	X 076 150			PC91UF15C125TF
	15 URF 91 TTF 0160	Y 076 151			PC91UF15C160TF
	15 URG 91 TTF 0200	A 076 153			PC91UG15C200TF
	15 URK 91 TTF 0225	B 076 154			PC91UK15C225TF
	15 URH 91 TTF 0250	C 076 155			PC91UH15C250TF
	15 URH 91 TTF 0315	D 076 156			PC91UH15C315TF
	15 URH 91 TTF 0350	E 076 157			PC91UH15C350TF
92	15 URF 92 TTF 0200	F 076 158	900	1	PC92UF15C200TF
	15 URG 92 TTF 0250	G 076 159			PC92UG15C250TF
	15 URK 92 TTF 0315	H 076 160			PC92UK15C315TF
	15 URK 92 TTF 0350	J 076 161			PC92UK15C350TF
	15 URH 92 TTF 0400	K 076 162			PC92UH15C400TF
	15 URK 92 TTF 0400	M 076 003			PC92UK15C400TF
	15 URH 92 TTF 0500	V 076 194			PC92UH15C500TF
	15 URH 92 TTF 0550	L 076 163			PC92UH15C550TF
93	15 URF 93 TTF 0230	L 097 829	1250	1	PC93UF15C230TF
	15 URF 93 TTF 0250	M 076 164			PC93UF15C250TF
	15 URF 93 TTF 0315	N 076 165			PC93UF15C315TF
	15 URF 93 TTF 0350	P 076 166			PC93UF15C350TF
	15 URG 93 TTF 0375	Q 076 167			PC93UG15C375TF
	15 URK 93 TTF 0400	R 076 168			PC93UK15C400TF
	15 URK 93 TTF 0450	J 076 092			PC93UK15C450TF
	15 URK 93 TTF 0500	T 076 170			PC93UK15C500TF
	15 URH 93 TTF 0630	V 076 171			PC93UH15C630TF
	15 URJ 93 TTF 0700	W 076 172			PC93UJ15C700TF
	15 URB 93 TTF 0750	X 076 173			PC93UB15C750TF

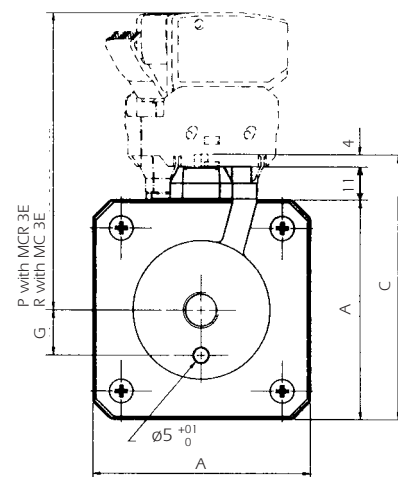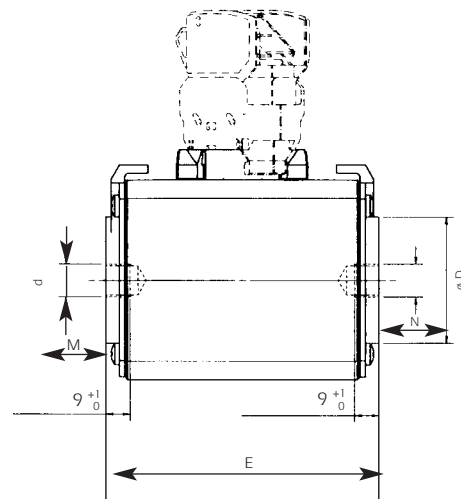

Microswitches : MC3E1-5N - Ref. D310020

MC3E1-5NBS - Ref. E310021

MC3E1-9NBS - Ref. F310022

MC3E1-5NET - Ref. L310027

MCR3E1-5N - Ref. G310023

MCR3E1-5NBS - Ref. P310030

MCR3E1-9NBS - Ref. H310024

MCR3E1-5NET - Ref. Q310031

For operating voltage
1250 VAC - DC max.

Insulation voltage 2200 VAC - DC

Threaded studs and microswitches supplied separately

Size	A	C	D	M [±]	N [±]	E ^{±1,7}	d	G ^{±0,1}	P	R
91	51	66	30	19	24	101	M8	9	87,5	72,5
	2"	2,6"	1-3/16"			3,98"		23/64"	3,45"	2,85"
92	60	74	38	19	39	101	M10	15	91,5	76,5
	2-3/8"	2,95"	1-1/2"			3,98"		19/32"	3,6"	3"
93	74,5	88	46	24	39	101	M12	15	98,5	83,5
	2-15/16"	3,5"	1-13/16"			3,98"		19/32"	3,9"	3,29"

Note : dimensions in mm and inches


M and N dimensions are with Metric studs Ref. Number S098801 for size 91 T098802 for size 92 and V098803 for size 93.

Maximum balanced nut tightening torque: 13,5 Nm (M8) - 26 Nm (M10)

46 Nm (M12)

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC French End contacts

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
2x92	15 URG 292 TTF 0500	Y 076 174	2460	1	PC292UG15C500TF
	15 URK 292 TTF 0630	Z 076 175			PC292UK15C630TF
	15 URK 292 TTF 0700	A 076 176			PC292UK15C700TF
	15 URH 292 TTF 0800	B 076 177			PC292UH15C800TF
	15 URH 292 TTF 1000	C 076 178			PC292UH15C10CTF
	15 URH 292 TTF 1100	D 076 179			PC292UH15C11CTF
2x93	15 URG 293 TTF 0750	P 081 755	3450	1	PC293UG15C750TF
	15 URK 293 TTF 0800	F 076 181			PC293UK15C800TF
	15 URK 293 TTF 0900	G 076 182			PC293UK15C900TF
	15 URK 293 TTF 1000	Q 081 756			PC293UK15C10CTF
	15 URH 293 TTF 1250	R 081 757			PC293UH15C13CTF
	15 URJ 293 TTF 1400	S 081 758			PC293UJ15C14CTF
	15 URB 293 TTF 1500	X 081 854			PC293UB15C15CTF

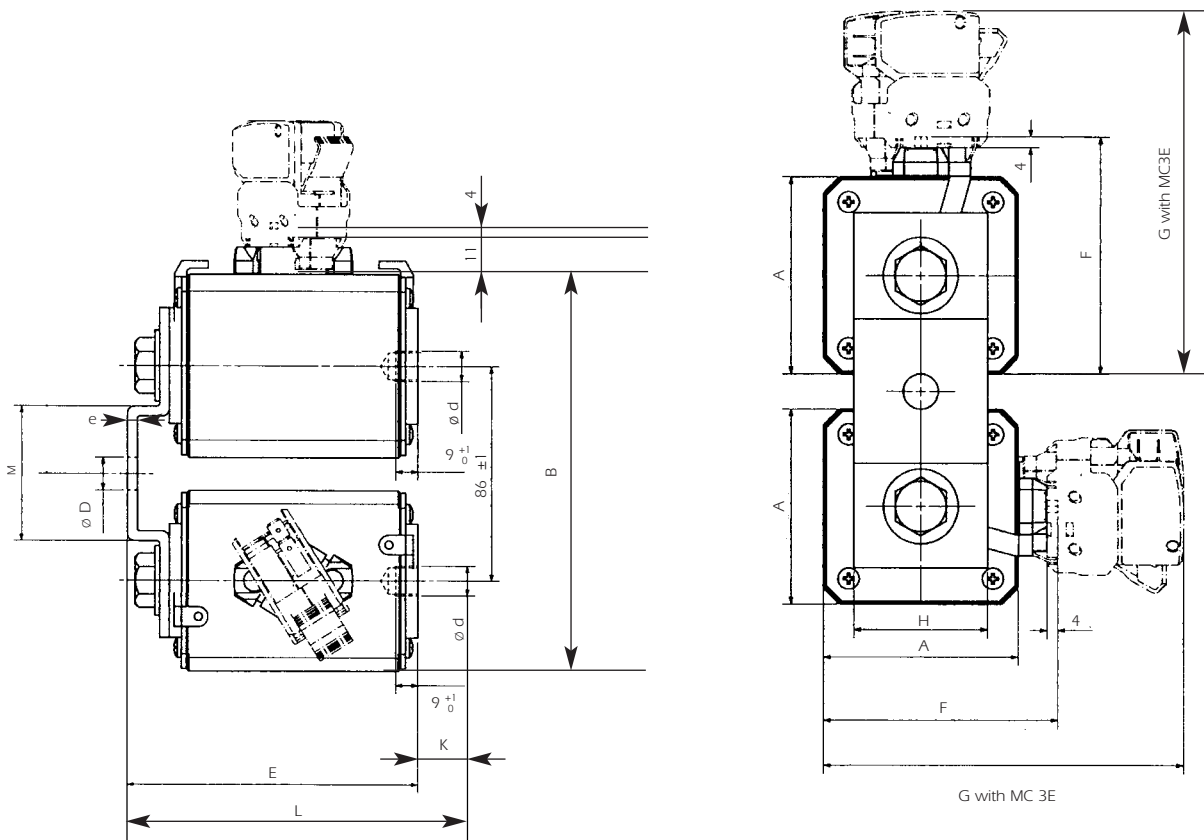

Threaded studs and microswitches supplied separately

Size	A	B	D	E ^{±1.7}	F	G	H	K	d	e	L	M	N
2x92 TT	60	147	11	118	74	106,5	35	40	M10	4	158	48	72
2x93 TT	74,5	164	13	118	88	121	50	40	M12	4	158	54	86

Dimensions in mm

K dimensions are with studs Ref. Number W098804 in size 2x92 and X098805 in size 2x93.


Maximum balanced nut tightening torque: 26 Nm (M10) and 46 Nm - (M12)

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

I²t corrective K factor

URF/URG/URK

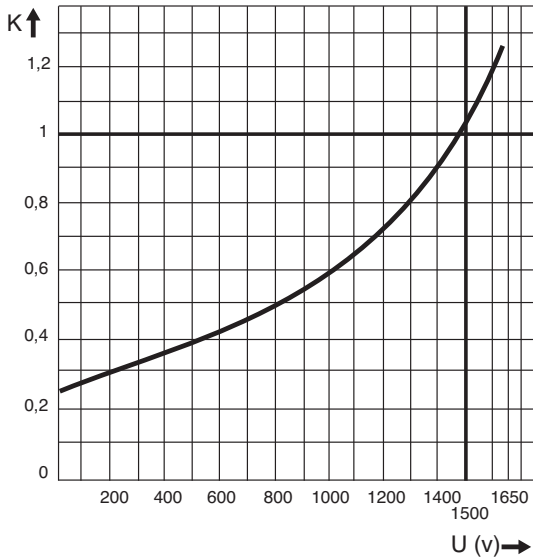

URB/URH/URJ

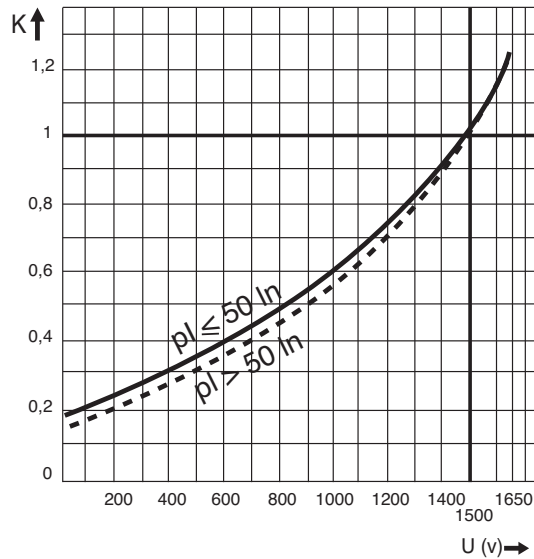


U: R.M.S. working voltage V

K: I²t corrective coefficient versus U


pl: Prospective Current in the fuse

Arc voltage

URF/URG/URK

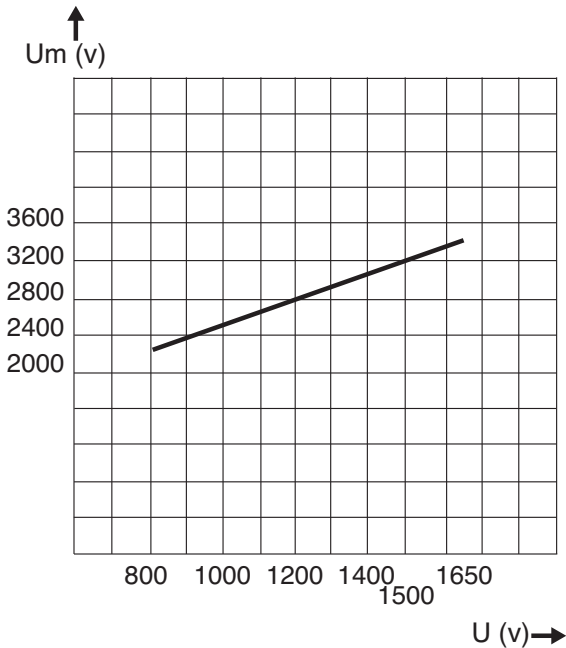

URB/URH/URJ

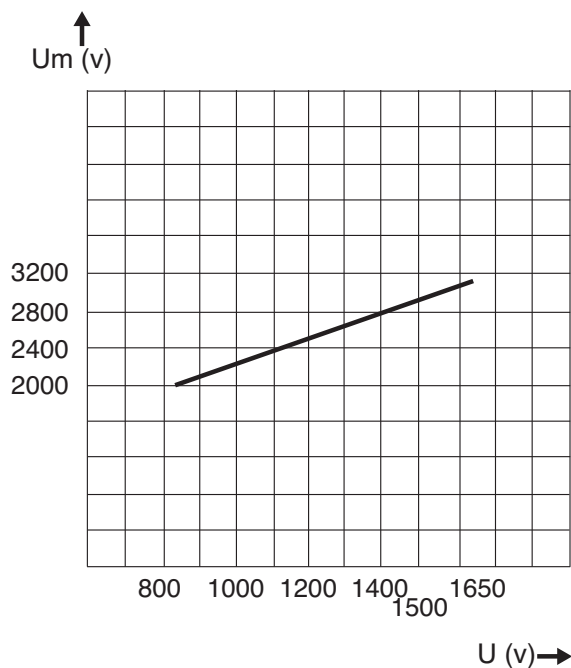


Um: arc voltage

U: R.M.S. working voltage V


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

Times/Current Characteristics

URF

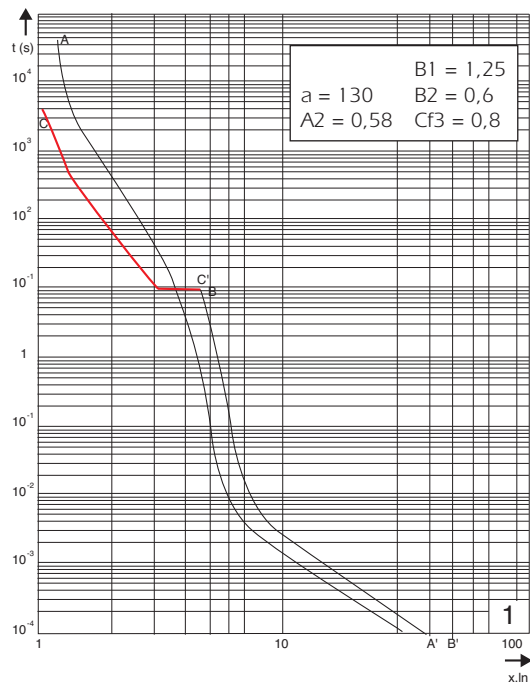


URG

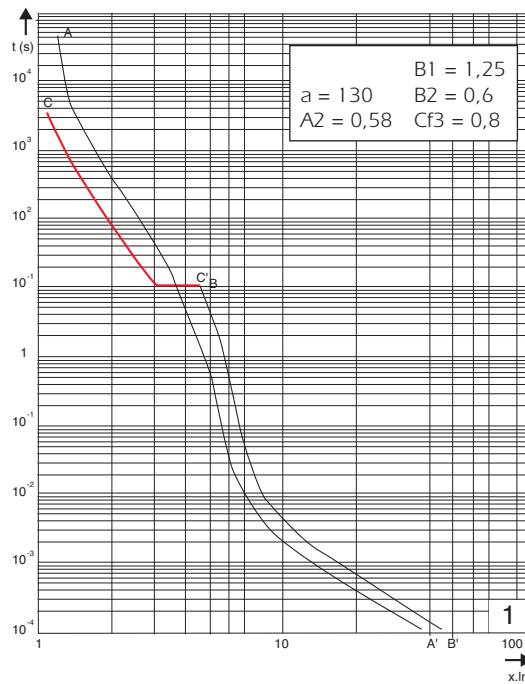

t: actual prearcing time (s) (average value)
x:In: R.M.S. value of prearc current in multiples of rated current


URK

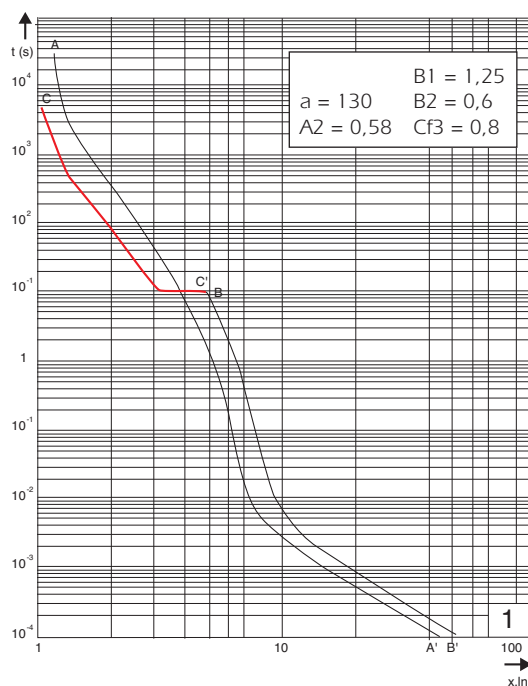


Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set


URB

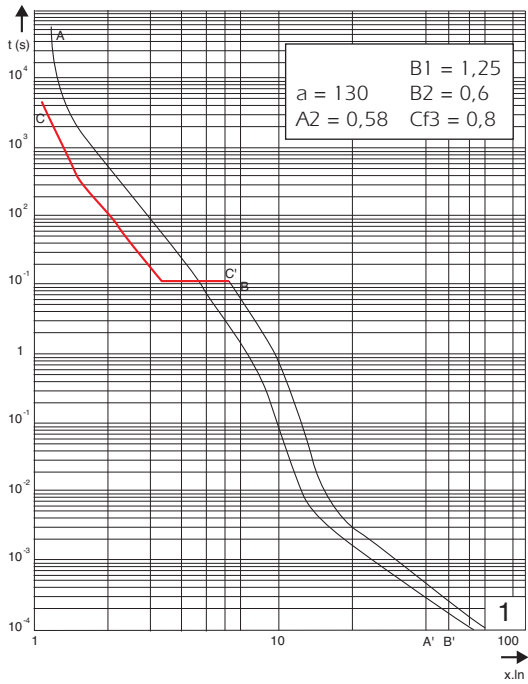

URH

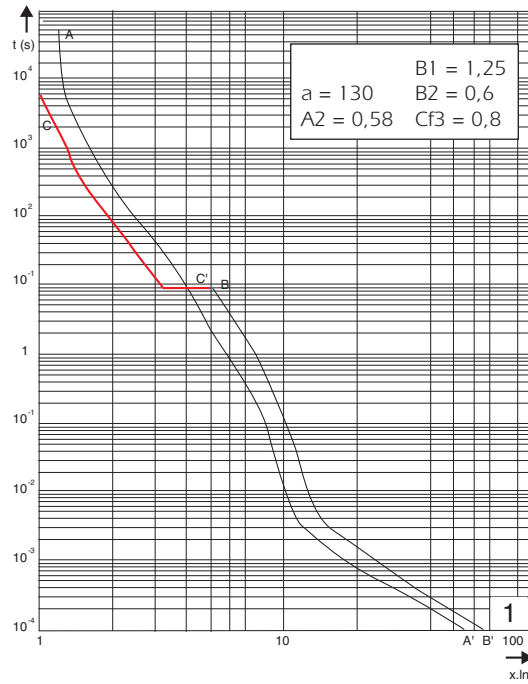

URJ

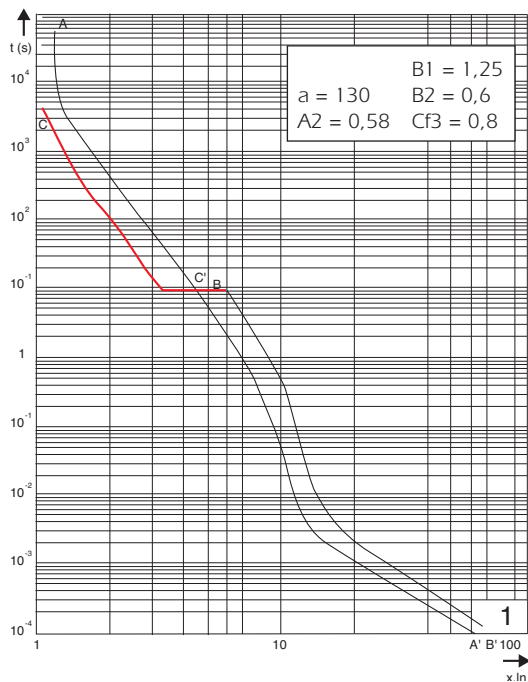

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Microswitches for other square-body Protistor®



- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE

Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp1,2/50} μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating						
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms		
								30V	110V	250V	30V	110V	250V
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A
	MCR3E 1-5NBS	6000 V	23 kV (2)	40 kV			DC		3 A		0.5 A	0.25A	3 A
	MCR3E 1-9NBS		24 kV (1)										
Watertight IP 50	MC2R3E 1-5NBS	6000 V	26 kV (2)	40 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A	
	MC2R3E 1-9NBS		32 kV (3)										
	MC3E 1-5NET		1250 V					11 kV	16 kV	DC	0.5 A		0,2 A
	MCR3E 1-5NET	2200 V	20 kV (1)	30 kV									
	MC2R3E 1-5NET	6000 V	24 kV (2)	40 kV									

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC


Microswitches for other square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

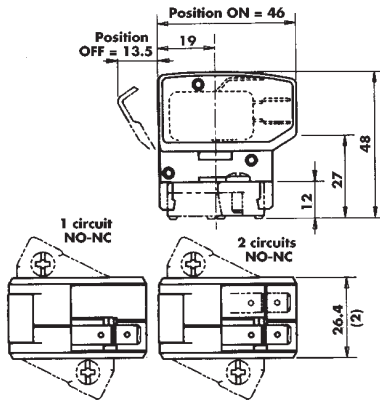


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

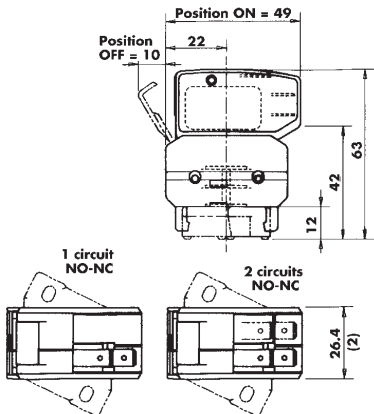


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

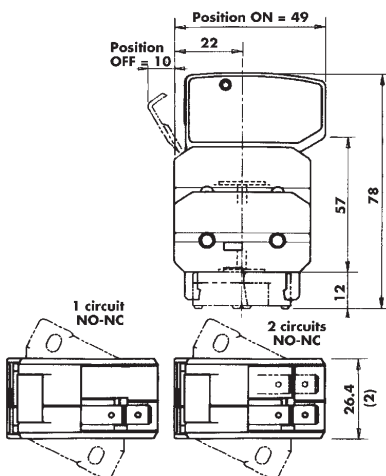


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightning torque (Nm) (1)	Maximum nut tightning torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics



Ferraz Shawmut 1500 V PSC fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. These square body fuse-links are available in three different body sizes, each size having four world-wide acceptable mounting styles. The different mounting styles and body sizes along with a broad range of ampere ratings allow greatest flexibility in equipment design.

The Ferraz Shawmut PSC fuses have been engineered to provide state-of-the-art protection for SCRs, diodes, thyristors, GTO's and IGBT devices. They have pure silver die-cut elements embedded in solidified sand which helps control arcing characteristics for low I^2t and high breaking capacity. All contact surfaces are silver plated and all hardware is non-magnetic.

All fuse links are equipped with a low voltage trip-indicator. This trip-indicator can operate a field mountable microswitch which is easily mounted directly on to the fuse even while in service.

Highlights

- Extremely Fast Acting
- Current Limiting
- Very Low I^2t
- Worldwide Acceptability
- Superior Cycling Ability

Ratings

AC: 100 - 1500A
1500 VAC
200 KA IR

DC: Consult us

Approvals

C: Tested to IEC 60269.4 at UN +10 %

Features/Benefits

Choice of mounting styles gives wide choice for equipment design

Broad range of ampere ratings in a given body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications

Applications

Protection of rectifiers, inverters, DC drives, UPS Systems, reduced voltage motor starters, and other equipment in globally accepted applications




Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Main characteristics

Voltage (V)	Size	Type	Rating (A)	Maximum I ² t under 1500V (kA ² S)	Power losses in watts				Breaking capacities kA
					End contacts 0,8 In In		Blades 0,8 In In		
1 500 V	91	URF	100	10	18,5	35	18,5	35	1 500 V 200 kA
		URF	125	15	23	43	23	43	
		URF	160	24,5	29	55	29	55	
		URF	180	32,5	33	62	33	63	
		URG	200	50	27,5	52	28	53,5	
		URK	225	78	31	58,5	31	59	
		URH	250	246	25	47	25	47	
		URH	315	384	31	59	31	59	
	URH	350	466	35	66	35	66		
	92	URF	200	40	36,5	69	37,5	71	
		URG	250	84	37,5	73	39	76	
		URK	315	144	46	91	46,5	95	
		URK	350	200	51	101	52	106	
		URH	400	669	41,5	83	44	90	
		URH	500	983	50,5	101	53,5	109	
	93	URH	550	1 190	57,5	115	61	124	
		URF	250	60	48	95	49,5	98	
		URF	315	94	61	120	62	123	
		URF	350	135	67	133	69	137	
		URG	375	185	62	125	64,5	130	
		URK	400	240	60	122	61,5	128	
		URK	450	305	67	137	69	144	
		URK	500	375	77	158	79	165	
		URH	630	1 570	62,5	125	67	136	
		URJ	700	2 500	67	131	73	143	
	2X92	URB	750	3 000	73	143	80	156	
		URG	500	335	77,5	152			
		URK	630	576	93	190			
		URK	700	800	104	212			
		URH	800	2 680	87	177			
		URH	1 000	3 930	106	216			
	2X93	URH	1 100	4 760	120	246			
		URG	750	740	129	260			
		URK	800	960	122	256			
		URK	900	1 220	138	288			
		URK	1 000	1 500	160	332			
		URH	1 250	6 280	131	268			
		URJ	1 400	10 000	143	280			
	URB	1 500	12 000	148	310				




Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC German Blades (DIN 140)

Size	Designation	Reference Number	Weight (g)	Packaging	Catalog Number
91	15 URF 91 D14F 0100	Z 076 060	800	1	PC91UH15C100D4F
	15 URF 91 D14F 0125	A 076 061			PC91UF15C125D4F
	15 URF 91 D14F 0160	B 076 062			PC91UF15C160D4F
	15 URF 91 D14F 0180	C 076 063			PC91UF15C180D4F
	15 URG 91 D14F 0200	D 076 064			PC91UG15C200D4F
	15 URH 91 D14F 0250	T 076 101			PC91UH15C250D4F
	15 URH 91 D14F 0315	V 076 102			PC91UH15C315D4F
	15 URH 91 D14F 0350	W 076 103			PC91UH15C350D4F
	15 URF 91 D14A 0100	V 221 232*			PC91UH15C100D4A
	15 URF 91 D14A 0125	M 210 737*			PC91UF15C125D4A
	15 URF 91 D14A 0160	L 077 037*			PC91UF15C160D4A
	15 URF 91 D14A 0180	-			
	15 URG 91 D14A 0200	A 221 214*			PC91UG15C200D4A
	15 URH 91 D14A 0250	D 221 309*			PC91UH15C250D4A
	15 URH 91 D14A 0315	-			
15 URH 91 D14A 0350	-				
92	15 URF 92 D14F 0200	F 076 066	1100	1	PC92UF15C200D4F
	15 URG 92 D14F 0250	G 076 067			PC92UG15C250D4F
	15 URK 92 D14F 0315	H 076 068			PC92UK15C315D4F
	15 URK 92 D14F 0350	J 076 069			PC92UK15C350D4F
	15 URH 92 D14F 0400	X 076 104			PC92UH15C400D4F
	15 URH 92 D14F 0500	Y 076 105			PC92UH15C500D4F
	15 URH 92 D14F 0550	Z 076 106			PC92UH15C550D4F
	15 URF 92 D14A 0200	-			
	15 URG 92 D14A 0250	-			
	15 URK 92 D14A 0315	C 097 959*			PC92UK15C315D4A
15 URK 92 D14A 0350	-				
15 URH 92 D14A 0400	-				
15 URH 92 D14A 0500	-				
15 URH 92 D14A 0550	K 078 278*		PC92UH15C550D4A		
93	15 URF 93 D14F 0250	K 076 070	1800	1	PC93UH15C250D4F
	15 URF 93 D14F 0315	L 076 071			PC93UF15C315D4F
	15 URF 93 D14F 0350	M 076 072			PC93UF15C350D4F
	15 URG 93 D14F 0375	N 076 073			PC93UG15C375D4F
	15 URK 93 D14F 0400	P 076 074			PC93UK15C400D4F
	15 URK 93 D14F 0450	Q 076 075			PC93UK15C450D4F
	15 URK 93 D14F 0500	R 076 076			PC93UK15C500D4F
	15 URH 93 D14F 0630	A 076 107			PC93UH15C630D4F
	15 URJ 93 D14F 0700	B 076 108			PC93UJ15C700D4F
	15 URB 93 D14F 0750	S 076 123			PC93UB15C750D4F
	15 URF 93 D14A 0250	-			
	15 URF 93 D14A 0315	-			
	15 URF 93 D14A 0350	-			
	15 URG 93 D14A 0375	-			
	15 URK 93 D14A 0400	-			
15 URK 93 D14A 0450	J078277		PC93UK15C450D4A		
15 URK 93 D14A 0500	-				

* D14A Type

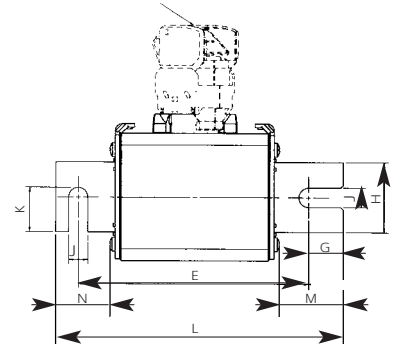

D14F Type

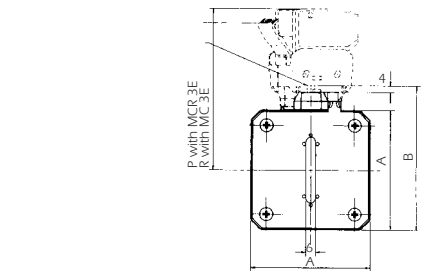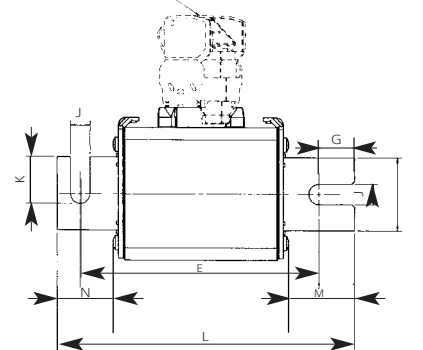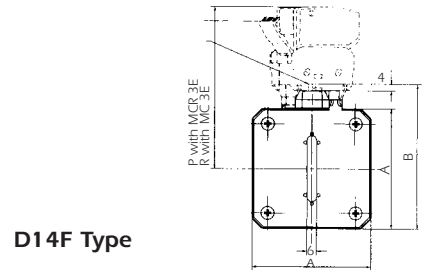

Fuse Size	A	B	E ^{±2}	H	J	K	L ^{±2}	M	N	P	R
91 DIN 140	51	66	133-145	25	11,1	17,7	166	37,2	31,6	87,5	72,5
92 DIN 140	60	74	133-145	32	11,1	21,5	166	37,2	31,6	91,5	76,5
93 DIN 140	74,5	88	133-145	40	11,1	25,5	166	36,7	31,1	98,3	83,5


For other terminals: "US blades"; "D17A"; D17F; "D21A"; "D21F" consult us.
Microswitches supplied separately

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

I²t corrective K factor

URF/URG/URK

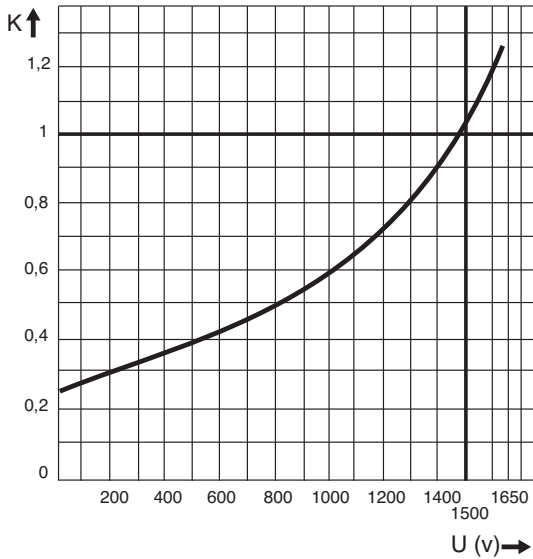

URB/URH/URJ

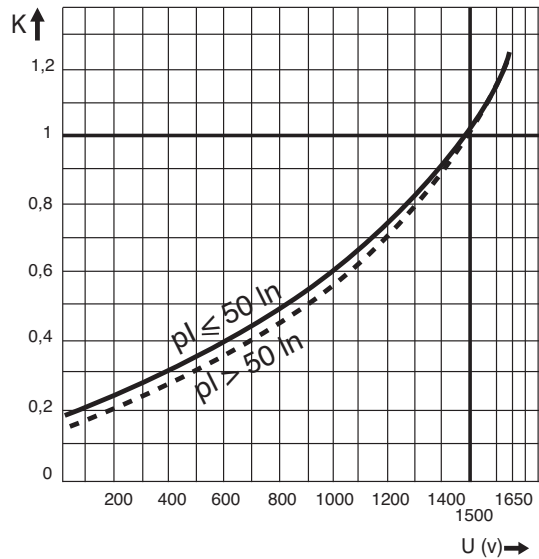


U: R.M.S. working voltage V
K: I²t corrective coefficient versus U


pl: Prospective Current in the fuse

Arc voltage

URF/URG/URK

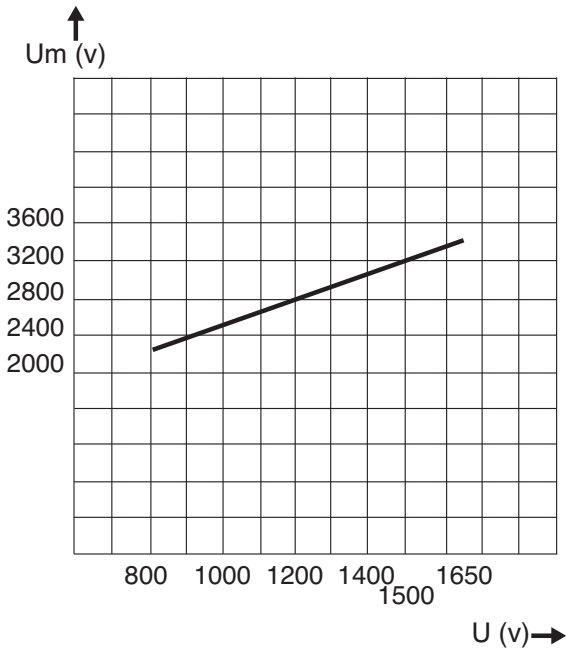

URB/URH/URJ

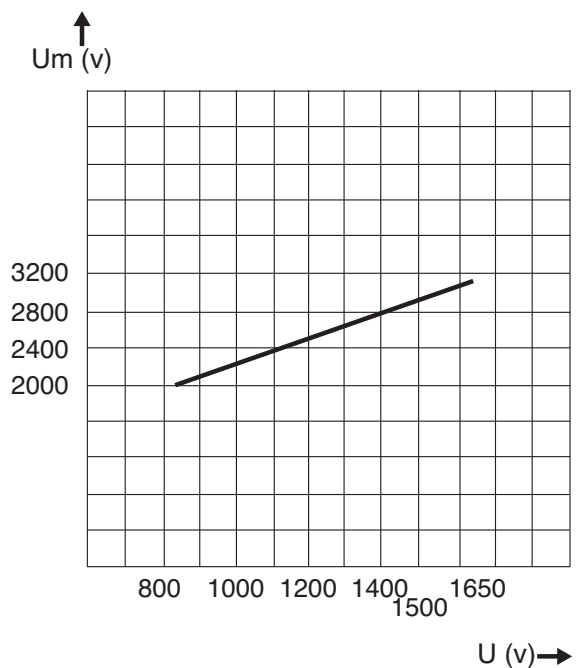


Um: arc voltage
U: R.M.S. working voltage V


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

Times/Current Characteristics

URF

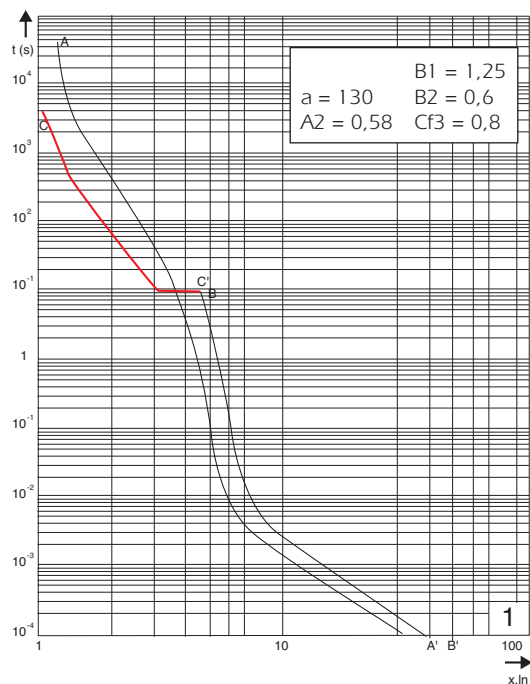


URG

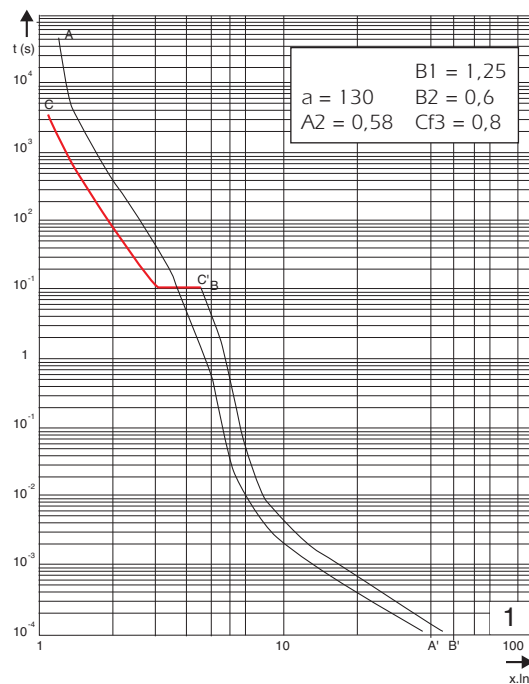

t: actual prearcing time (s) (average value)
x.In: R.M.S. value of prearc current in multiples of rated current


URK

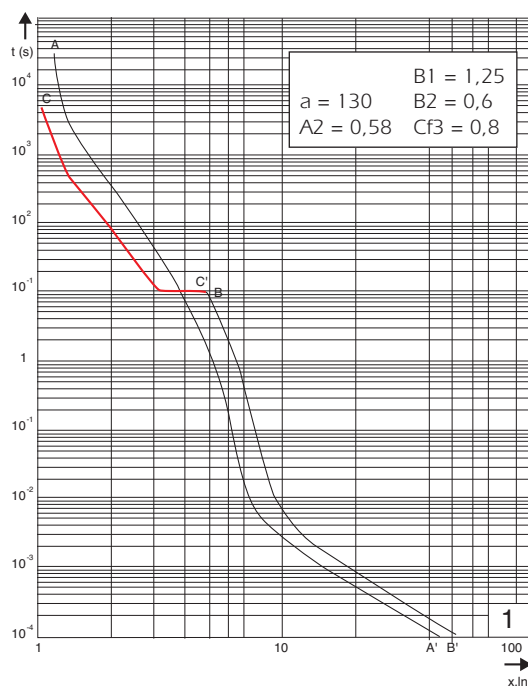


Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set


URB

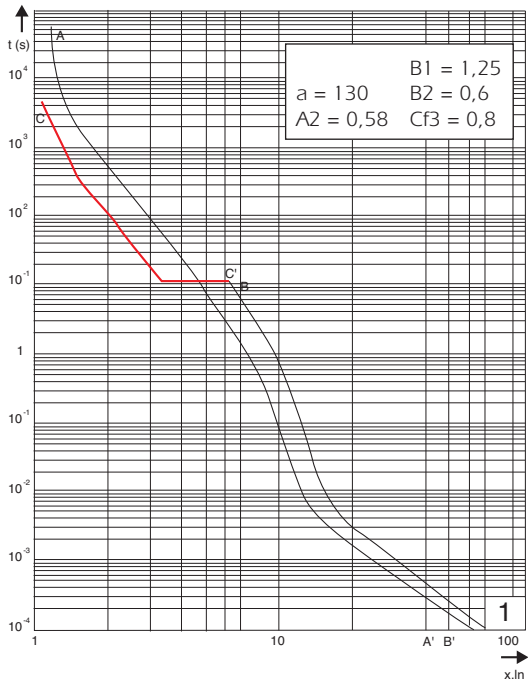

URH

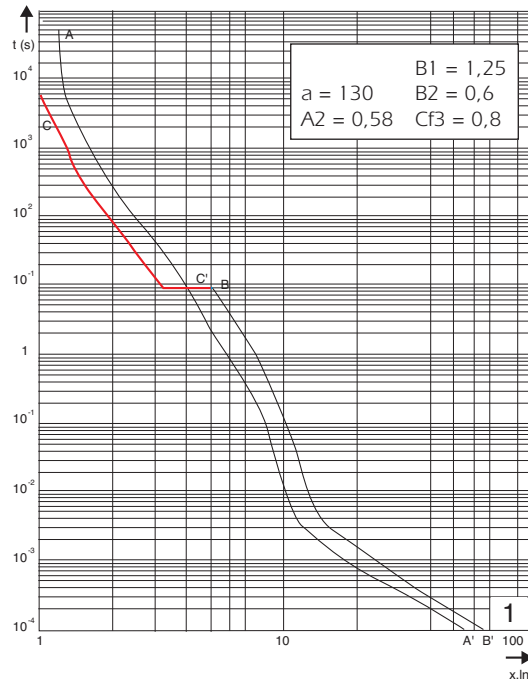

URJ

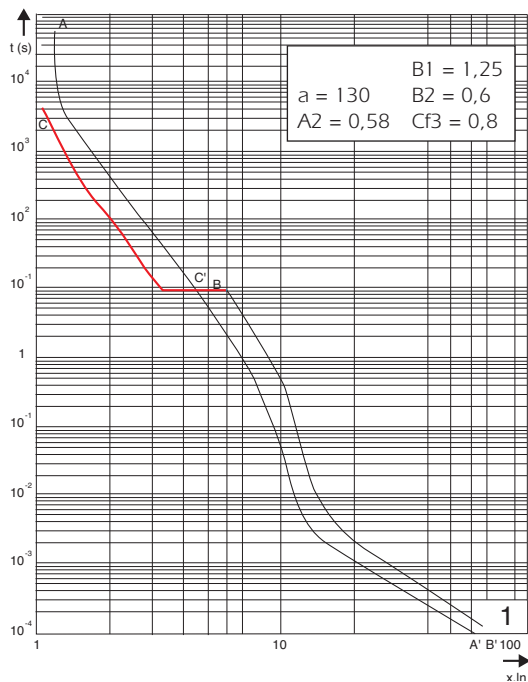

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Microswitches for other square-body Protistor®



- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE

Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp1,2/50} μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating							
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms			
								30V	110V	250V	30V	110V	250V	
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A	
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A	
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A	
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A	2 A
	MCR3E 1-5NBS	6000 V	23 kV (2)	40 kV			DC		3 A		0.5 A	0.25A	3 A	0.2 A
	MCR3E 1-9NBS		24 kV (1)											
Watertight IP 50	MC2R3E 1-5NBS	6000 V	26 kV (2)	40 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A		
	MC2R3E 1-9NBS		32 kV (3)											
	MC3E 1-5NET		11 kV					16 kV	DC	0.5 A		0,2 A		
	MCR3E 1-5NET	2200 V	20 kV (1)	30 kV										
	MC2R3E 1-5NET	6000 V	24 kV (2)	40 kV										

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC


Microswitches for other square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

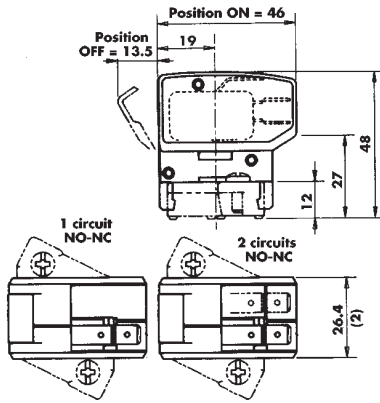


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

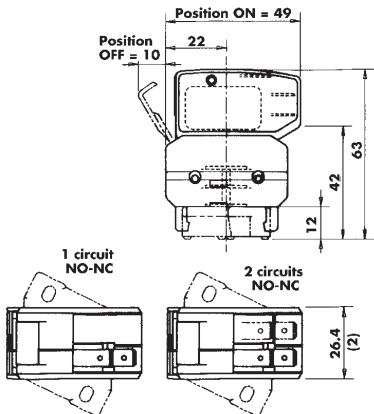


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

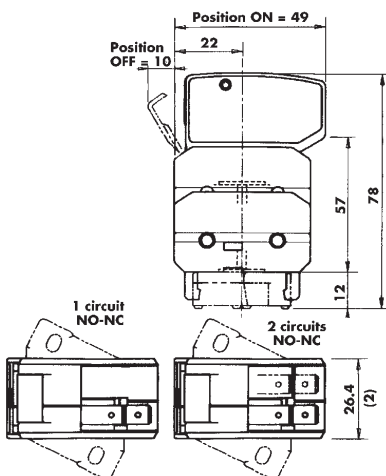


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting


Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

I²t corrective K factor

URF/URG/URK

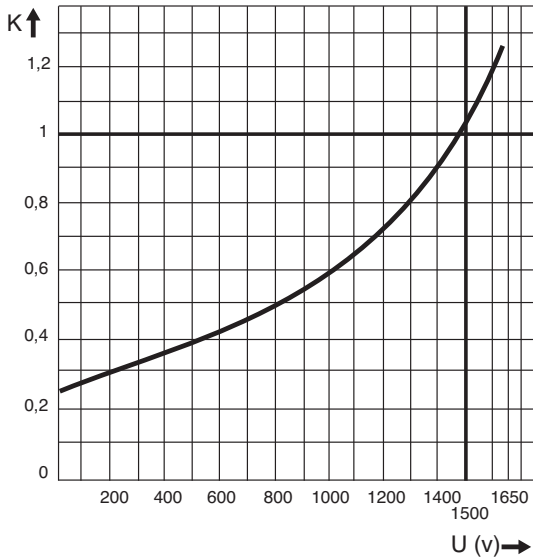

URB/URH/URJ

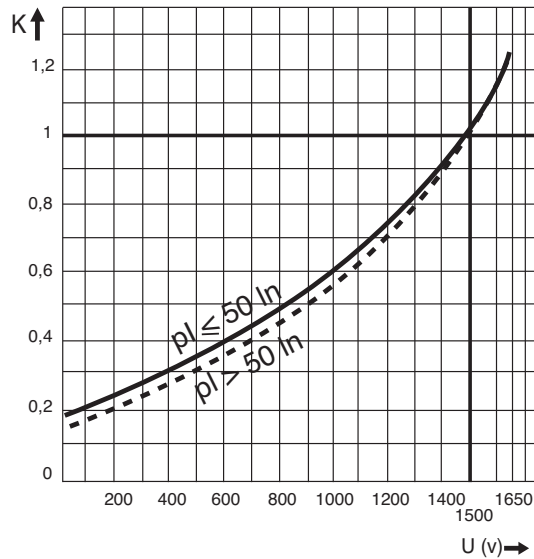


U: R.M.S. working voltage V

K: I²t corrective coefficient versus U


pl: Prospective Current in the fuse

Arc voltage

URF/URG/URK

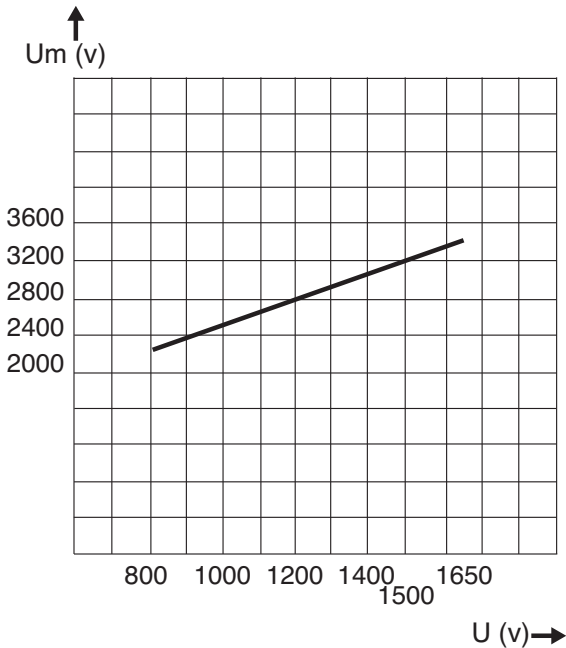

URB/URH/URJ

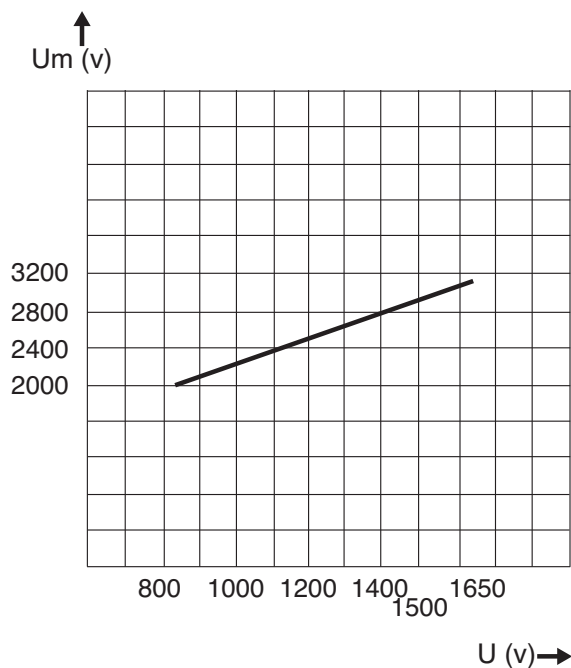


Um: arc voltage

U: R.M.S. working voltage V


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

Times/Current Characteristics

URF

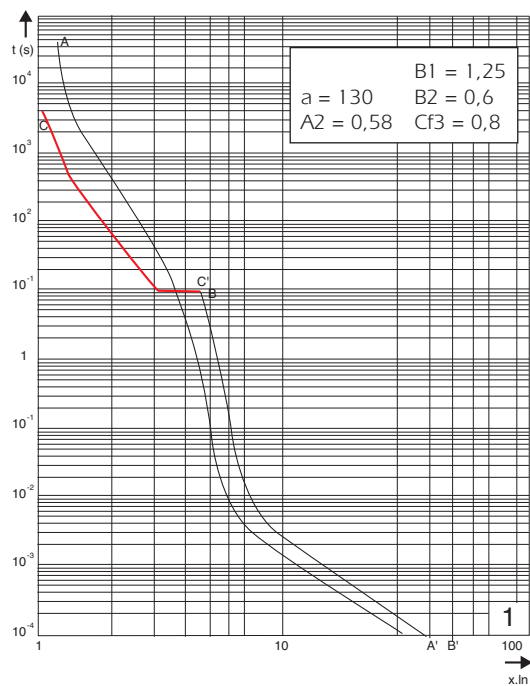


URG

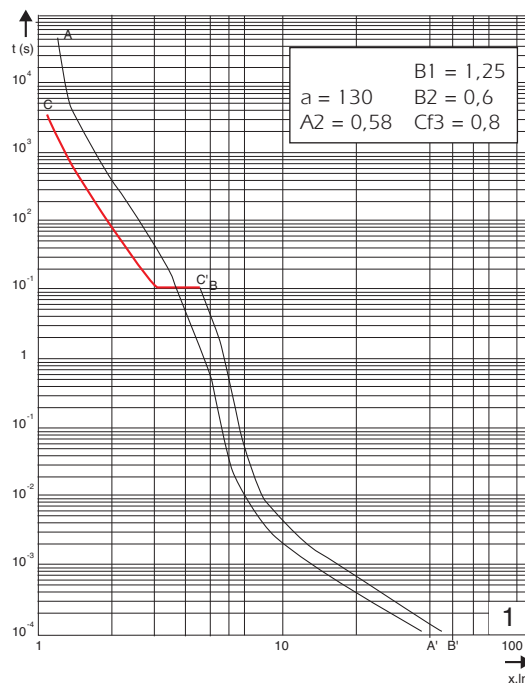

t: actual prearcing time (s) (average value)
x:In: R.M.S. value of prearc current in multiples of rated current


URK

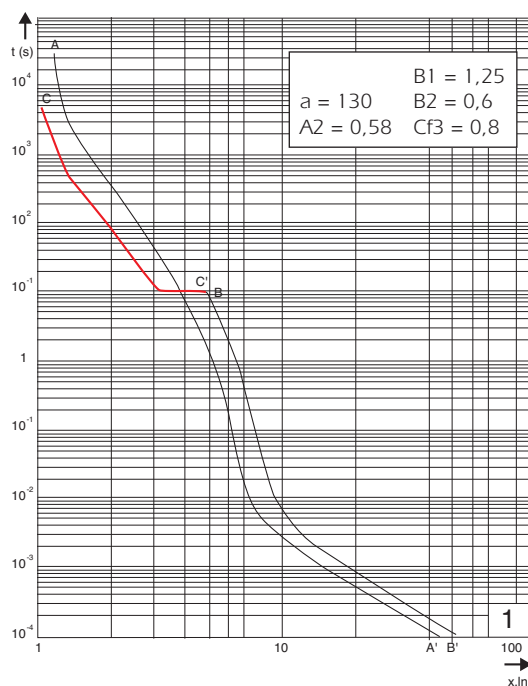


Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set


URB

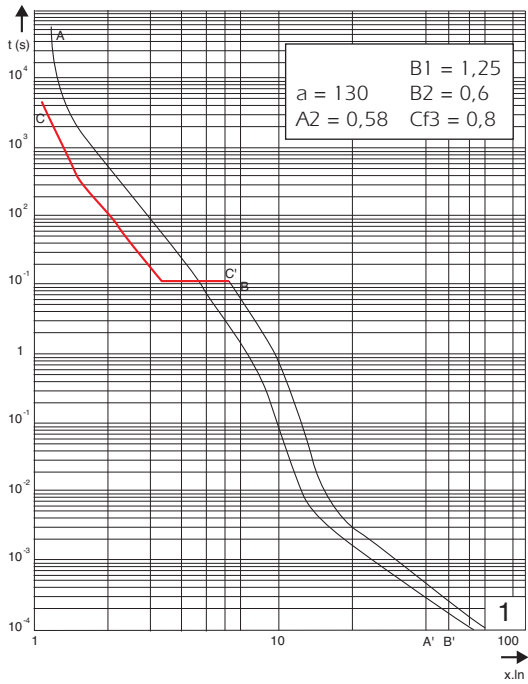

URH

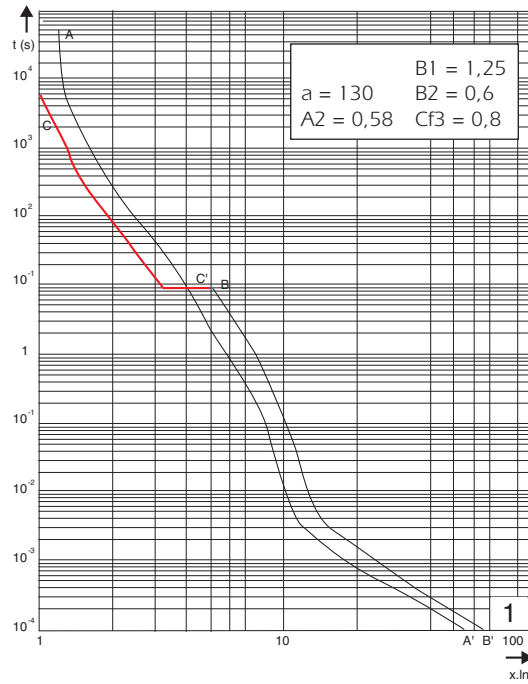

URJ

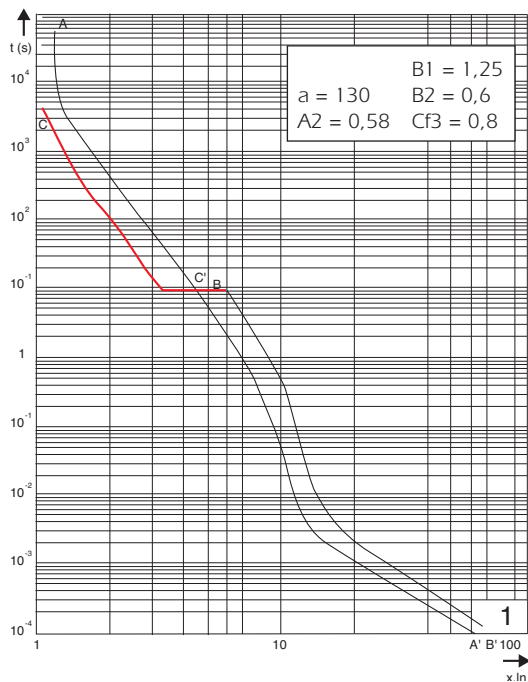

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Fuses bases for German Blades (DIN 140)

Fuse Holders

For D14F size 91 use fuse holder SE 43-91 Ref Number X226179

For D14F sizes 92 and 93 use fuse holder SE 43-92 Ref Number Y226180

For D14F size 93 use fuse holder SF 50-93 Ref X209090


These fuse holders are usable with D14F fuses and MC3E1-. N.microswitches.

For D14A size 91 use fuse holder SE 43-91 Ref Number X226179

For D14A size 92 and 93 use fuse holder SE 43-92 Ref Number Y226180

For D14A size 93 use fuse holder SF 50-93 Ref. X209090

These fuses D14A are usable with all MC3E1-.N.and MCR 3E1-.N microswitches on all fuses holders.

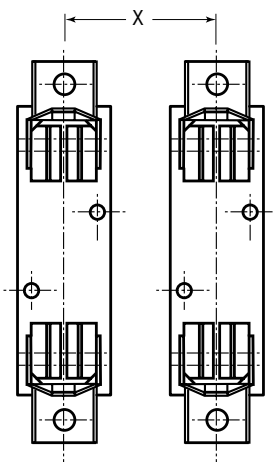

Distance "X" between poles axes (without partition)				
Fuses bases		Operating Voltage		
		1000 V	1250 V	1500 V
SE 43-91	X226179	71	76	79
SE 43-92	Y226180	80	85	88
SF 50-93	X209090	94,5	99,5	102,5

Semiconductor (AC) fuses


Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC

Fuses bases for German Blades (DIN 140)


"SF" BOLTED TIGHTENING (SF 50-93)

fig. 1

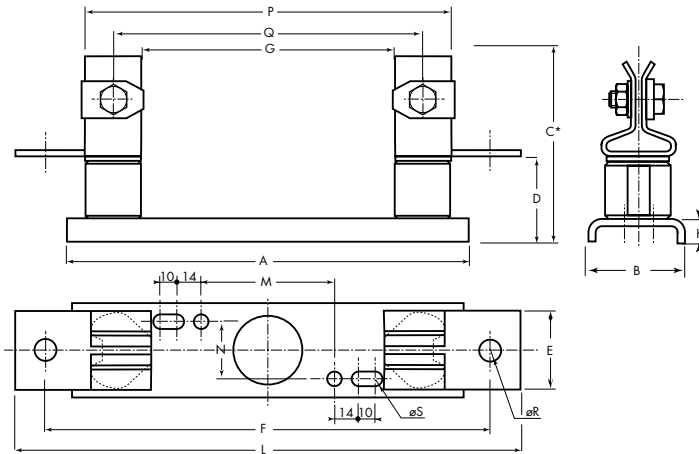

"SE" ELASTIC TIGHTENING (SE 43-91 ; SE 43-92)

fig. 2

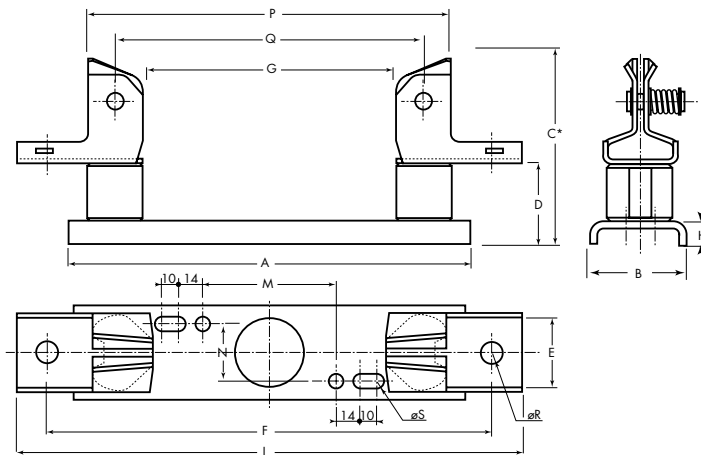

Reference Number	Designation	Drawing#	Catalog Number	A	B	C*	D	E	F	G	H	L	M	N	P	Q	ØR	ØS
X226179	SE 43-91	2	SE43-91	174	42	121	53	32	209	111	10	241	86	28	161	136	10,5	5,5
Y226180	SE 43-92	2	SE43-92	176	54	131	55	42	230	106	15	266	23	35	176	141	12,5	8,5
X209090	SF 50-93	1	SF50-93	200	60	176	70	40	236	106	15	276	47	35	176	141	18	8,5


* C are the dimensions to the top of the "D14F" fuses

Semiconductor (AC) fuses


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

I²t corrective K factor

URF/URG/URK

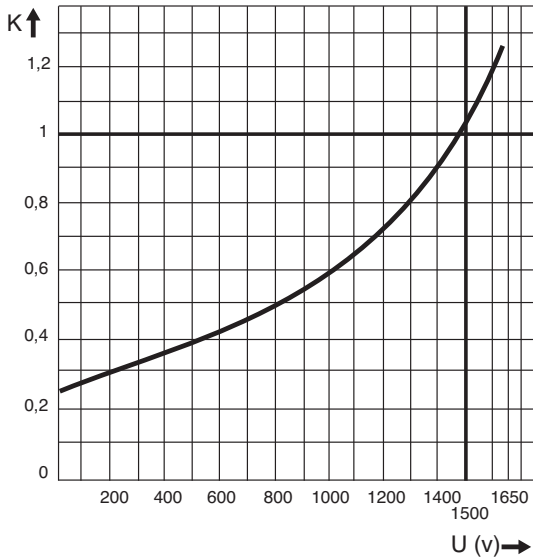

URB/URH/URJ

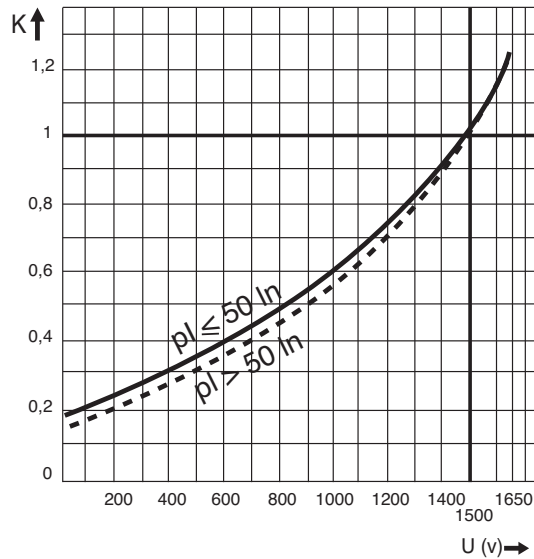


U: R.M.S. working voltage V
K: I²t corrective coefficient versus U


pl: Prospective Current in the fuse

Arc voltage

URF/URG/URK

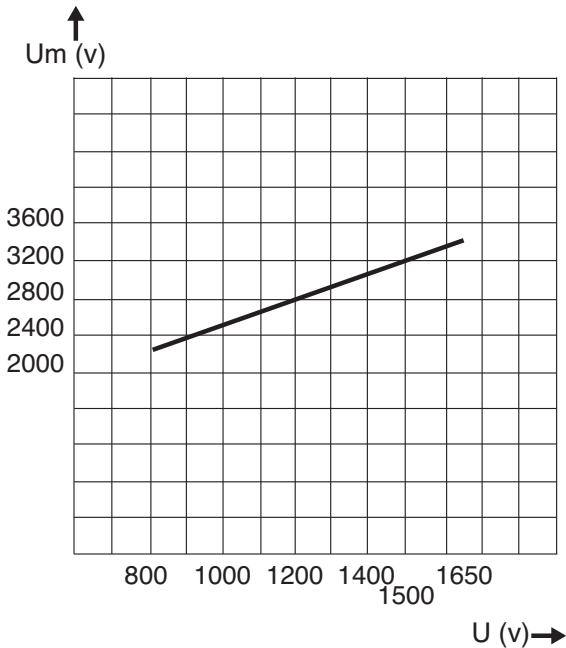

URB/URH/URJ

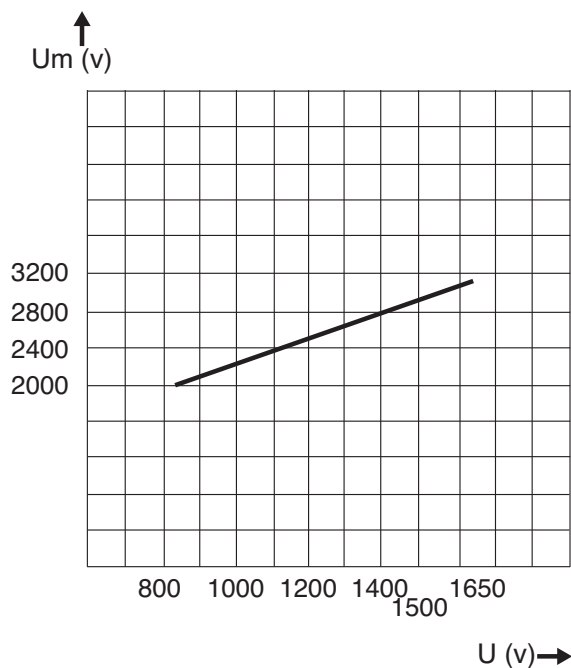


Um: arc voltage
U: R.M.S. working voltage V


Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set

Times/Current Characteristics

URF

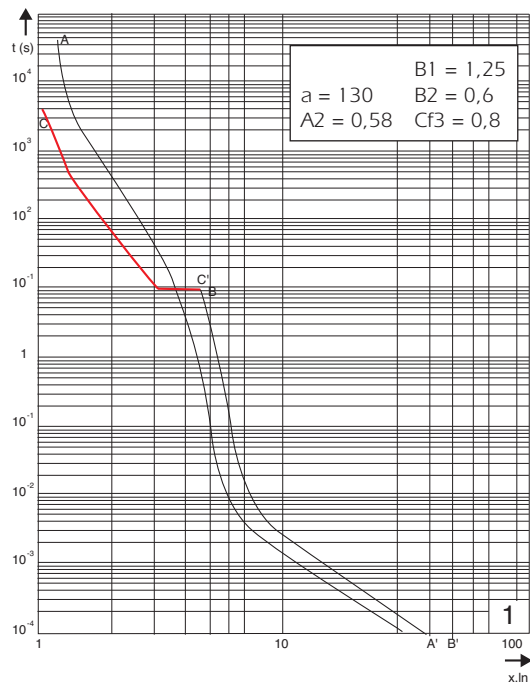


URG

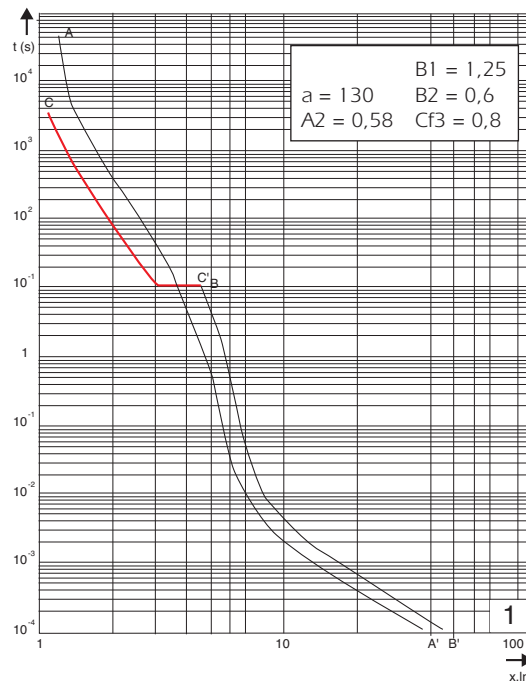

t: actual prearcing time (s) (average value)
x:In: R.M.S. value of prearc current in multiples of rated current


URK

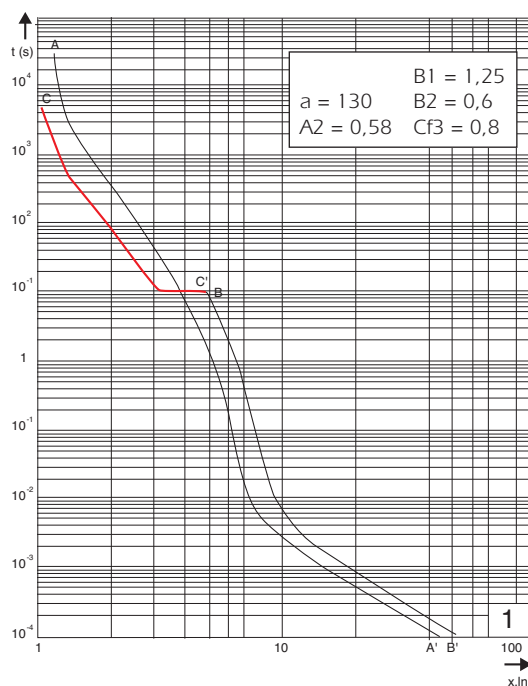


Semiconductor (AC) fuses

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Curves set


URB

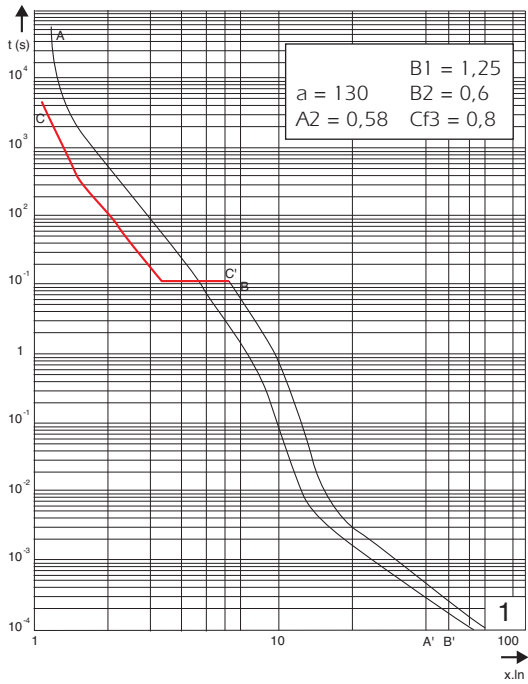

URH

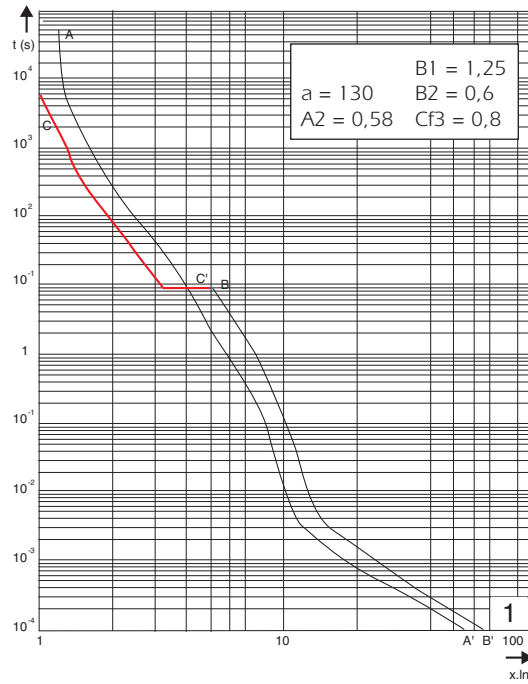

URJ

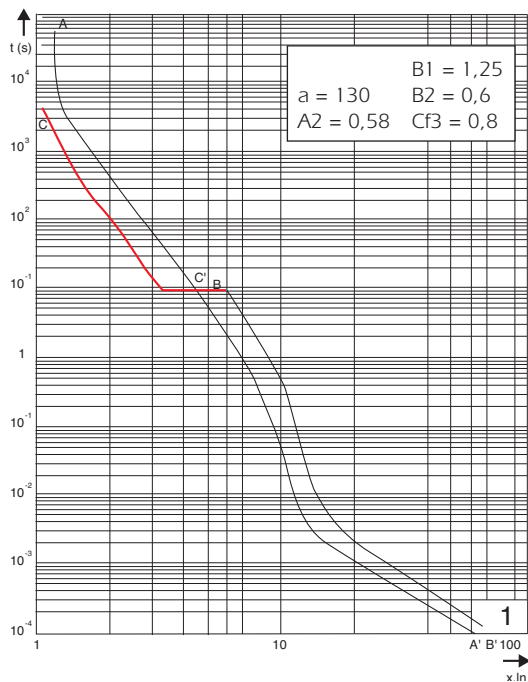

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Microswitches for other square-body Protistor®



- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE

Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp1,2/50} μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating						
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms		
								30V	110V	250V	30V	110V	250V
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A
	MCR3E 1-5NBS	6000 V	23 kV (2)	40 kV			DC		3 A		0.5 A	0.25A	3 A
	MCR3E 1-9NBS		24 kV (1)										
Watertight IP 50	MC2R3E 1-5NBS	6000 V	26 kV (2)	40 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A	
	MC2R3E 1-9NBS		32 kV (3)										
	MC3E 1-5NET		11 kV					16 kV	DC	0.5 A		0,2 A	
	MCR3E 1-5NET	2200 V	20 kV (1)	30 kV									
	MC2R3E 1-5NET	6000 V	24 kV (2)	40 kV									

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC


Microswitches for other square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

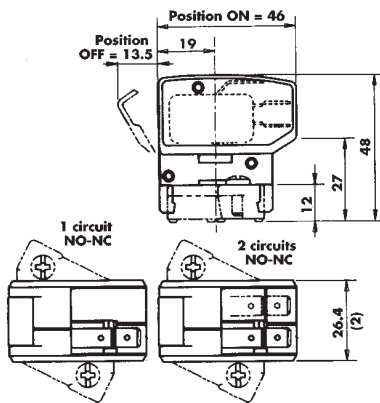


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

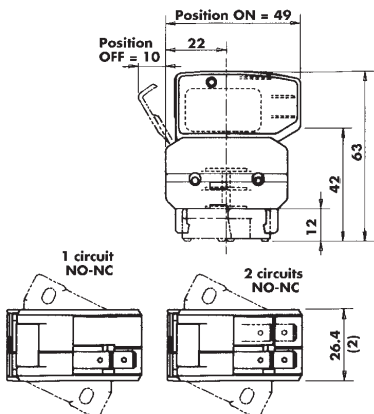


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

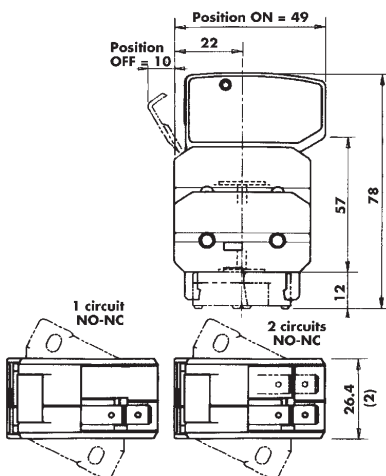


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC aR sizes 3x - 450V to 700 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STUM8x30M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STUM10x30M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STUM12x35M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STUM10x50
	HC stud pair M12x50	X098805	45	6 pairs	STUM12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Microswitches for other square-body Protistor®



- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE

Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp1,2/50} μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating						
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms		
								30V	110V	250V	30V	110V	250V
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A
	MCR3E 1-5NBS	6000 V	23 kV (2)	40 kV			DC		3 A		0.5 A	0.25A	3 A
	MCR3E 1-9NBS		24 kV (1)										
Watertight IP 50	MC2R3E 1-5NBS	1250 V	11 kV	16 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A	
	MCR3E 1-5NET							2200 V	20 kV (1)	30 kV	DC	0.5 A	
	MC2R3E 1-9NBS	6000 V	24 kV (2)	40 kV									

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC


Microswitches for other square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

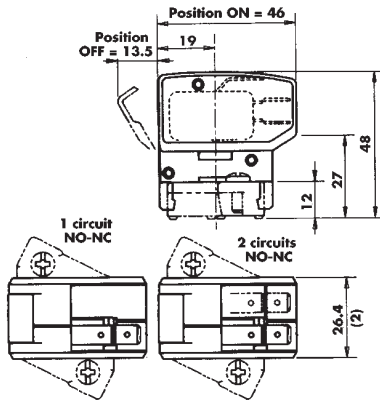


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

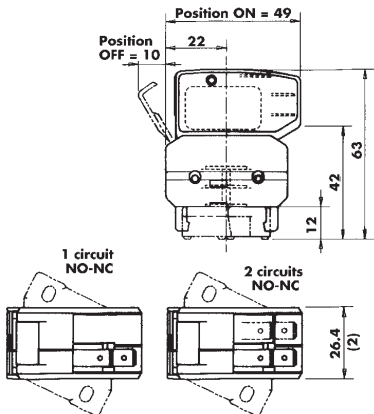


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

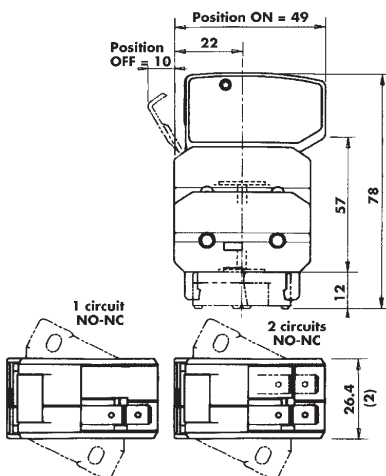


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2	HC stud pair M10x30 & M10x50	W098804	45	6 pairs	STU M10x50
	HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC - LR (large rectifier) PSC - LR ranges




25 URD 123 TTF 630



4 URD TDF 1000



9,5 URD 94 PPASF 3800
+ MC3E 1-5N

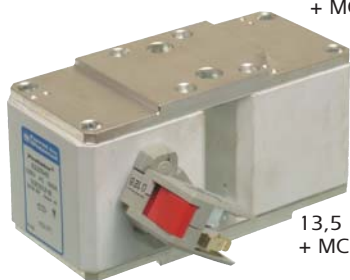

13,5 URD 283 PLAF 1600
+ MCR3E 1-5NBS

Ferraz Shawmut PSC-LR fuse-links provide maximum flexibility in equipment design and ultimate protection for today's power conversion equipment. These square body fuse-links are available in various body sizes with a broad range of ampere ratings allowing the greatest flexibility in equipment design.

The Ferraz Shawmut PSC-LR fuse range has been engineered to provide state of the art protection for high power semiconductors such as diodes, thyristors, GTO's, IGCT's and IGBT's.

They have pure silver fuse elements embedded in solidified sand which provides optimized I^2t and high interrupting rating. All contact surfaces are plated and all hardware non-magnetic.

All fuses are standard with a low voltage blown fuse indicator. This indicator can operate a microswitch which is easily mounted directly onto the fuse in service.

Features/Benefits

Customized terminals

available under request

Wide range of mounting styles

Broad range of ampere ratings in each body size for design flexibility

IEC 60269-4 compliance for fuses for worldwide semiconductor applications

Highlights

- Highly current limiting.
- Isolating fuse
- High breaking capacities
- High capability of selection in case of external fault
- Worldwide acceptance.
- Superior cycling ability.
- High withstanding in rush current and overloads
- Optimized coordination ratio

Ratings

AC: up to 10 000A
130 V - 3 800V
100 - 240 kA IR

DC: Consult Factory

Applications

Protection of large rectifiers, inverters, static transfer switch, AC & DC drives and UPS systems.

Approvals

AC: Tested to IEC 60269-4



13,5 URD 294 TDSFF 3400
+ MCR3E 1-5NBS




13 URD 84 TQFPLA 0900

Protistor® Square-body Fuses PSC - LR (large rectifier) PSC - LR ranges

This selection chart shows the global PSC-LR fuse link range and help to select the proper fuse size for your technical needs.

On the following pages, fuse technical data are shown from size 33 up to size 2 x 174.

In addition, you will find a selection of accessories such as threaded studs, micro switches as well as mounting torque and clamping force information.

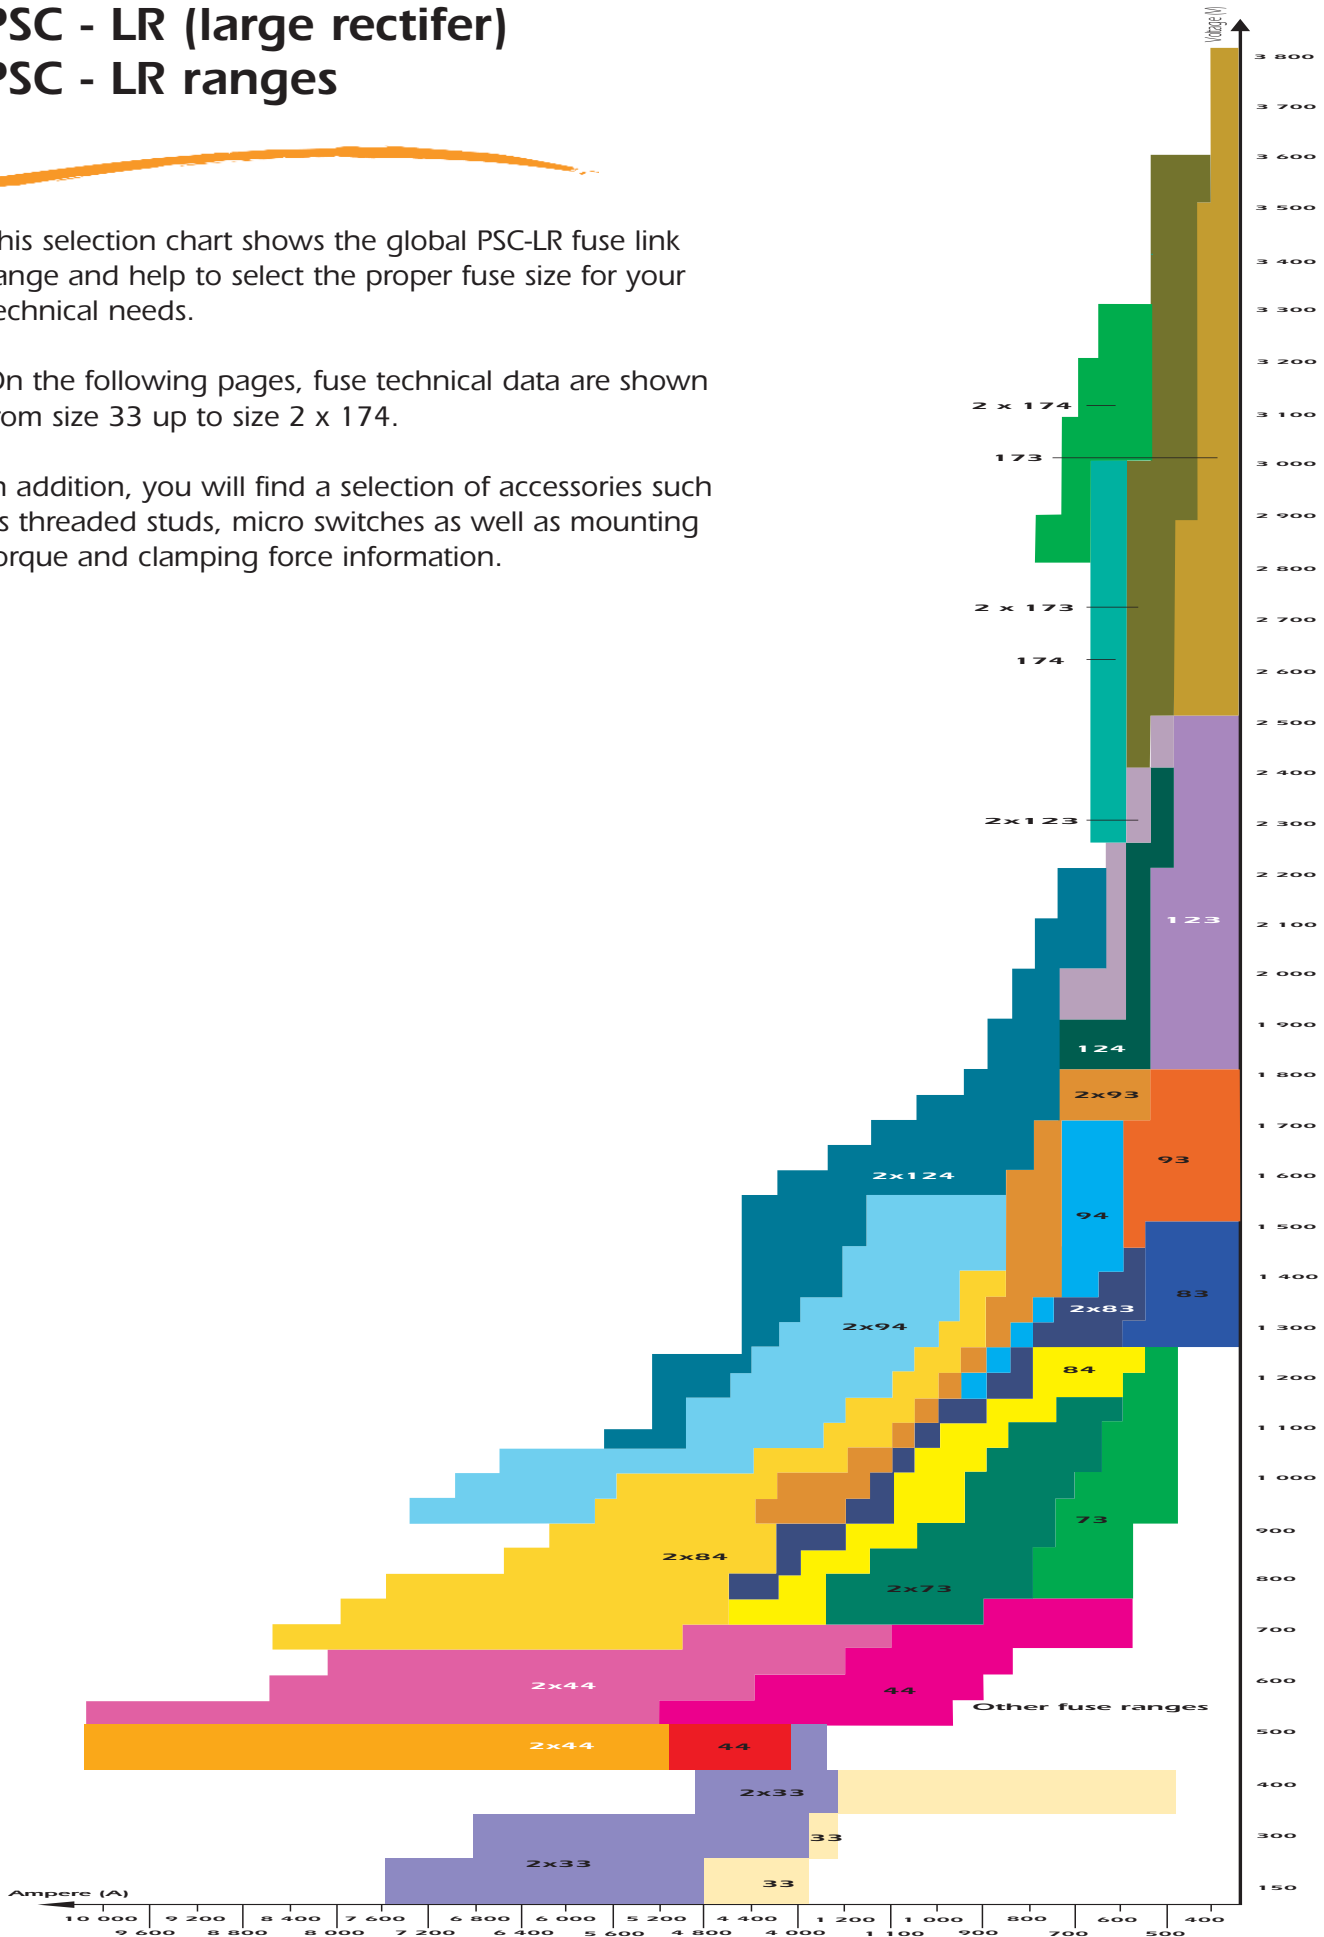

Protistor® Square-body Fuses PSC - LR (large rectifier) Microswitches for other Square-body Protistor®

Microswitch system for round and square-body fuses (except PSC line)

- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE



Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp} 1,2/50 μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating						
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms		
								30V	110V	250V	30V	110V	250V
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A
	MCR3E 1-5NBS	24 kV (1)	40 kV	DC			3 A		0.5 A		0.25A	3 A	0,2 A
	MCR3E 1-9NBS	26 kV (2)											
Watertight IP 50	MC2R3E 1-5NBS	6000 V	24 kV (1)	40 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A	
	MC2R3E 1-9NBS	26 kV (2)											
	MC2R3E 1-5NET	32 kV (3)											
Watertight IP 50	MC3E 1-5NET	1250 V	11 kV	16 kV	10 V 10 mA	3 A	DC	3 A	3 A		1 A	1 A	
	MCR3E 1-5NET	2200 V	20 kV (1)	30 kV				0.5 A		0,2 A			
	MC2R3E 1-5NET	6000 V	24 kV (2)	40 kV									

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC - LR (large rectifier)


Microswitches for other Square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

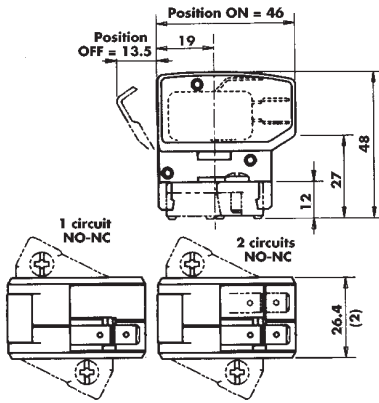


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

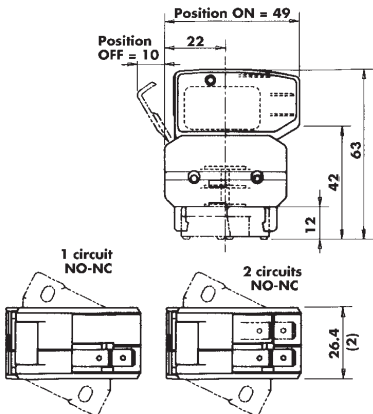


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

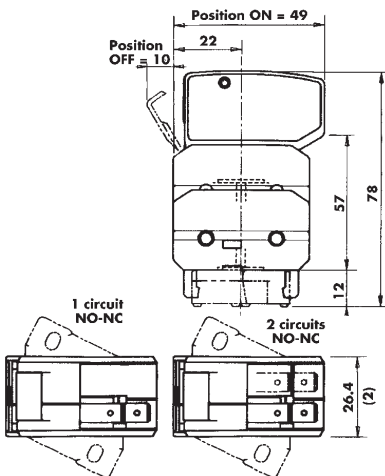


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC - LR (large rectifier) Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Protistor® Square-body Fuses PSC aR sizes 9x - 1500 VAC Microswitches for other square-body Protistor®



- REMOTE SIGNALING SYSTEMS FOR FITTING ON FERRAZ SHAWMUT FUSES EQUIPPED WITH MICROSWITCH SUPPORT: all square-body sizes 44 / 8X / 9X / 12X / 17X / 30X and 60X
- PERMANENT INDICATION OF FUSE STATE
 - CONDUCTIVE
 - BLOWN
- MANUAL RESETTING
- STANDARD AND LOW ELECTRICAL LEVEL WITH DIFFERENT INSULATION LEVELS
- VAPOR AND WATERTIGHT MODEL FOR USE IN CORROSIVE ATMOSPHERE

Main Characteristics

Type	Designation	AC or DC Insulation voltage rating U _i (V)	AC voltage withstand test (*)	Impulse voltage test U _{imp1,2/50} μs (**)	Positive operating min. voltage /min. current	Current rating	Interrupting rating						
							Current	Non-inductive circuit			Inductive circuit: L/R = 25ms		
								30V	110V	250V	30V	110V	250V
Standard	MC3E 1-5N	1250V	15 kV	20 kV	20 V 50 mA	5 A	50/60 Hz	10 A	10 A	7 A			6 A
	MCR3E 1-5N	2200	20 kV	30 kV			DC	5 A	0.5 A			1,6 A	0,3 A
Low level	MC3E 1-5NBS	1250 V	15 kV	20 kV	10 V 10 mA	3 A	50/60 Hz	3 A	3 A	3 A	2 A	1 A	1 A
	MC3E 1-9NBS							2200 V	20 kV (1)	30 kV	3 A	3 A	3 A
	MCR3E 1-5NBS	6000 V	23 kV (2)	40 kV			DC		3 A		0.5 A	0.25A	3 A
	MCR3E 1-9NBS		24 kV (1)				40 kV	3 A	0.5 A	0.25A	3 A	0.2 A	0.1 A
MC2R3E 1-5NBS	6000 V	26 kV (2)	40 kV	DC	3 A	0.5 A		0.25A	3 A	0.2 A	0.1 A		
MC2R3E 1-9NBS		32 kV (3)		3 A	0.5 A	0.25A	3 A	0.2 A	0.1 A				
Watertight IP 50	MC3E 1-5NET	1250 V	11 kV	16 kV	10 V 10 mA	3 A	50 Hz	3 A	3 A		1 A	1 A	
	MCR3E 1-5NET	2200 V	20 kV (1)	30 kV				DC	0.5 A		0,2 A		
	MC2R3E 1-5NET	6000 V	24 kV (2)	40 kV			DC	0.5 A		0,2 A			

Catalog Numbering system: MC3E 1-5 single pole microswitch - MC3E 1-9 double pole microswitch - MCR, MC2R reinforced insulation microswitch.

* Between power circuit and microswitch terminals as per IEC 60 and 694 and NFC 64010 (50/60 Hz 1 min duration in dry air).

** Between power circuit and microswitch terminals U_{imp}: impulse voltage according to IEC 947-1.

*** Between power circuit and microswitch terminals

(1) fitting sizes 44 - 70 - 71 - 72 - 73 - 83 - 84 fuses.

(2) fitting sizes 91 - 92 - 93 - 94 -120 - 121 - 122 - 123 - 124 fuses.

(3) fitting sizes 171 - 172 - 173 - 174 - 300 - 302 - 600 - 602 fuses.


Semiconductor (AC) fuses

Protistor® Square-body Fuses

PSC aR sizes 9x - 1500 VAC


Microswitches for other square-body Protistor®

Remote signaling with 1250 V AC/DC insulation voltage

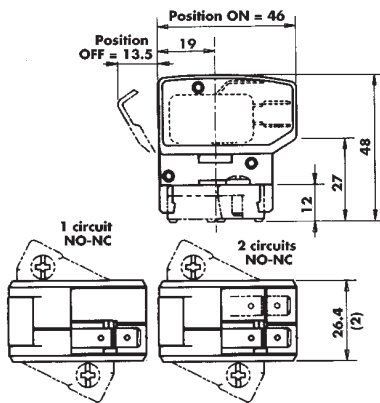


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MC3E 1-5N	D310020	39.5	3	MC3E1-5N
1	low level	MC3E 1-5NBS	E310021	39.5	3	MC3E1-5NBS
2	low level	MC3E 1-9NBS	F310022	45.7	3	MC3E1-9NBS
1	watertight	MC3E 1-5NET	L310027	40.2	3	MC3E1-5N ETANCHE

Remote signaling with insulation voltage up to 2200 V AC/DC

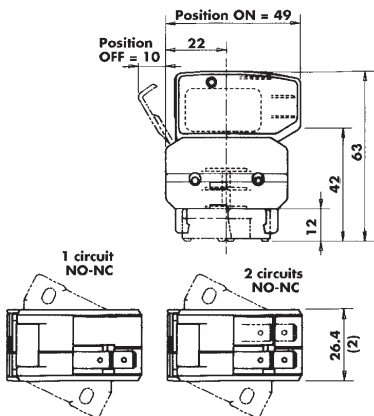


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	standard	MCR3E 1-5N	G310023	51.7	1	MCR3E1-5N
1	low level	MCR3E 1-5NBS	P310030	51.7	1	MCR3E1-5NBS
2	low level	MCR3E 1-9NBS	H310024	58.0	1	MCR3E1-9NBS
1	watertight	MCR3E 1-5NET	Q310031	52.5	1	MCR3E1-5N ETANCHE

Remote signaling with insulation voltage up to 6000 V AC/DC

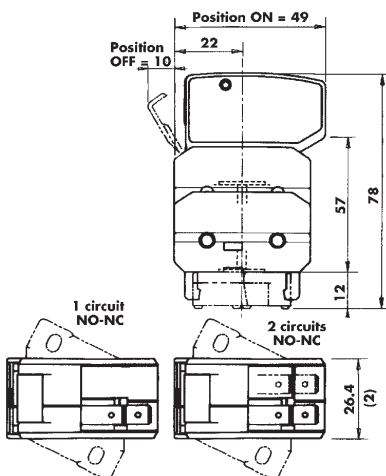


Quantity of NO-NC separated circuits	Contact	Designation	Ref. Number	Weight (g)	Pack. (1)	Catalog Number
1	low level	MC2R3E 1-5NBS	J310025	64.0	1	MC2R3E1-5NBS
1	watertight	MC2R3E 1-5NET	N310029	64.8	1	MC2R3E1-5NET
2	low level	MC2R3E 1-9NBS	K310026	70.3	1	MC2R3E1-9NBS

Electrical diagram of each microswitch circuit



Non-blown fuse
Microswitch ON



Blown fuse
Microswitch OFF

All of these signalling systems are hand resettable and fitted with silver-plated 3-terminal microswitch C, NO and NC.

The C terminal is on the top and connection is made via 6.35 mm clips except for watertight models whose clips are 4.8 mm wide.

NOTE (2): The 26.4 dimension is the same with 1 or 2 separated circuits NO-NC.

Tests with sine vibrations carried out at ambient with scanning of the three main holder axes.

Spectrum: 1st segment (2 to 16 Hz) constant trip $x = 5$ mm peak.

2nd segment (16 to 250 Hz) constant acceleration $g = 5$ g peak.



Exponential scanning speed : 1 octave per minute.

Duration: 2 hours per axis.

Protistor® Square-body Fuses PSC - LR (large rectifier) Metric-studs




Metric studs for threaded terminal fuses



Type and fuse size	Designation	Ref. Number	Unit weight (g)	Pack.	Catalog Number
 Sizes 0 and 1 Size 2 Size 3	HC stud pair M8x30 & M8x35	S098801	23	6 pairs	STU M8x30 M8x35
	HC stud pair M10x30 & M10x50	T098802	40	6 pairs	STU M10x30 M10x50
	HC stud pair M12x35 & M12x50	V098803	60	6 pairs	STU M12x35 M12x50
 Size 2 Size 3	HC stud pair M10x50	W098804	45	6 pairs	STU M10x50
	HC stud pair M12x50	X098805	45	6 pairs	STU M12x50

We recommend the use of studs, whose quality is suited to all FERRAZ SHAWMUT square-body fuses with terminals

Stud mounting

Torque type	Stud type	Maximum stud tightening torque (Nm) (1)	Maximum nut tightening torque (Nm) (1)
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Balanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46
Unbalanced torque 	M8x30 & M8x35	10	13.5
	M10x30 & M10x50	15	26
	M12x35 & M12x50	15	46

(1) Factory limit on torque at 20°C ambient: +0, -2Nm; except on 46Nm value (+0, -4Nm)

Other Protistor® Fuses Ferrule Fuses 10x38 gRB - 690VAC

690V AC
gRB - from 1 up to 30 A
Size: 10x38



The fuse preselection table below indicates: 

- rated current (or rating) I_N
- pre-arcing I^2t (I^2t_D) at 1 ms
- total operating I^2t (I^2t_{tt}) at 690V, $\cos \varphi=0.15$, and for a total operating time from 8 to 10 ms
- dissipated power P_N at the rated current I_N , and at $0.8 I_N$ in steady state
- Nominal breaking capacity, checked by tests made in accordance with IEC standard.



Voltage Rating (VAC)	Rated current I_N (A)	Pre-arcing I^2t I^2t_p (A ² s)	Total I^2t at 660VAC I^2t_{tt} (A ² s)	Dissipated power		Peak arc voltage (V)	Breaking capacity I (kA)
				at I_N (W)	at $0.8 I_N$ (W)		
690	1	0,075	0,28	0,9	0,52	2500	160 kA 690 V (IEC)
	1,25	0,115	0,36	1,25	0,7		
	1,5	0,185	0,57	1,5	0,81		
	2	0,42	1,3	2	1,1		
	2,5	0,88	2,7	2,1	1,15		
	3	1,55	4,6	2,3	1,25		
	4	4	12	2,6	1,35		
	5	8,6	25	2,7	1,4		
	6	15	44	2,9	1,5		
	8	3,3	33	2,4	1,35	1450	
	10	5,4	55	3,4	1,85		
	12,5	8,5	82	3,4	1,9		
	16	16	145	4,1	2,3		
	20	230	250	4,3	2,4		
	25	58	470	4,7	2,7		
30 (32*)	96	740	5	2,9			

* Non approval rating



Semiconductor (AC) fuses

Other Protistor® Fuses French Ferrule 10x38 gRB - 690VAC



Maximum values of total operating I^2t and total operating times

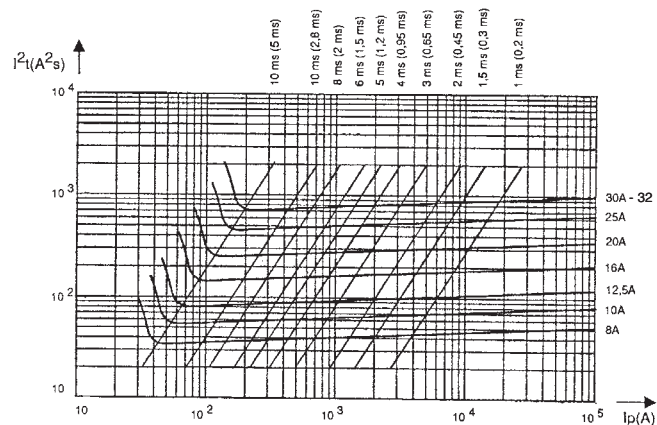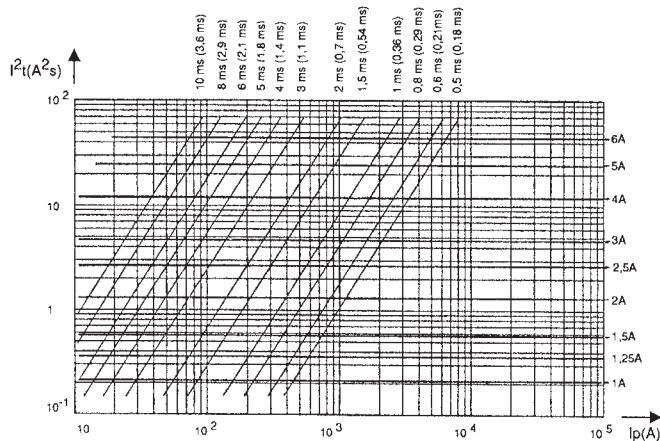

Arc voltage

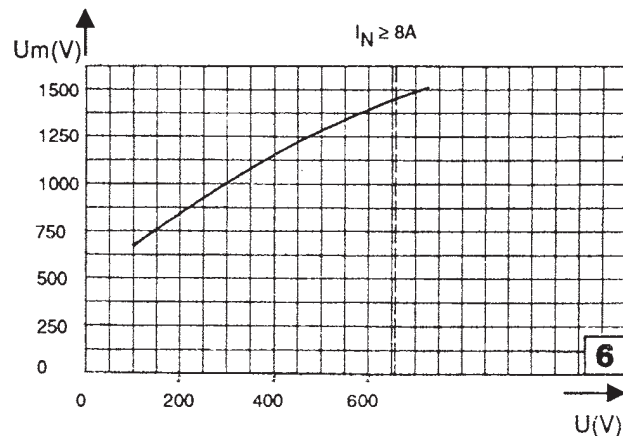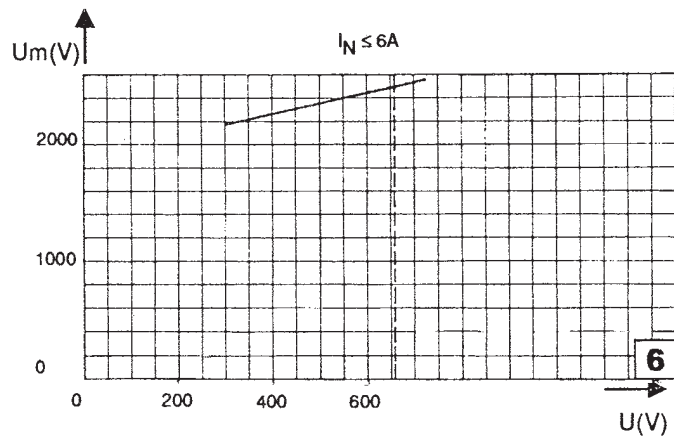


Multiplier coefficient

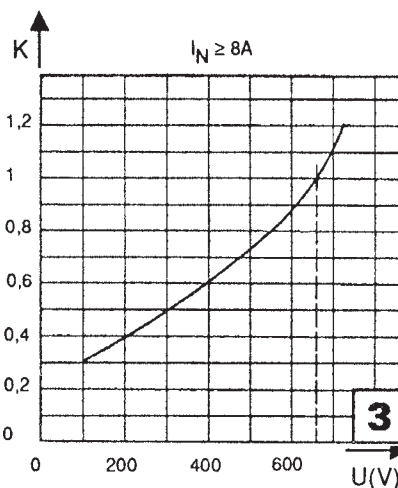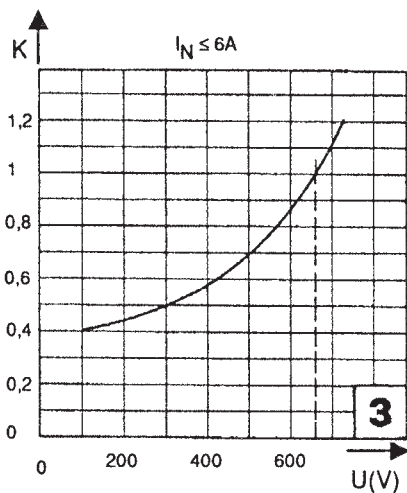


Other Protistor® Fuses Ferrule Fuses 10x38 gRB - 690VAC


Time-current characteristics (1 to 6 A)

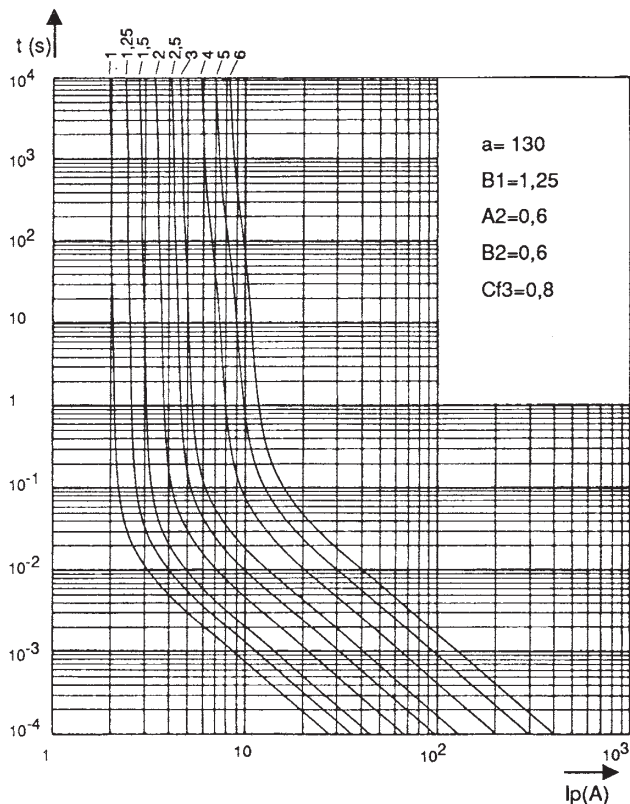


Cut-off characteristics

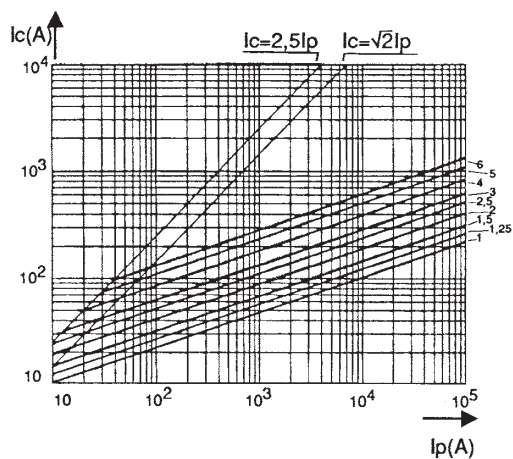

Time-current characteristics (8 to 30 A)

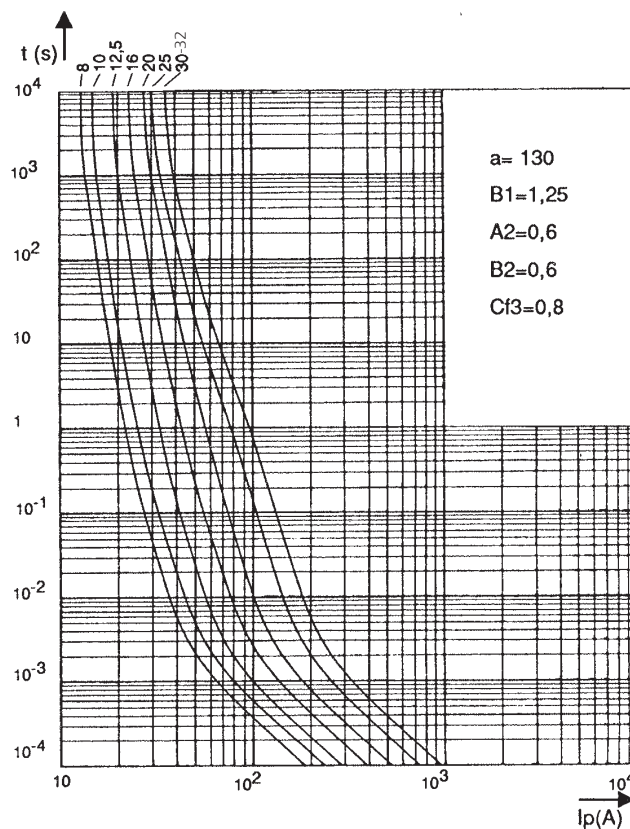

Cut-off characteristics

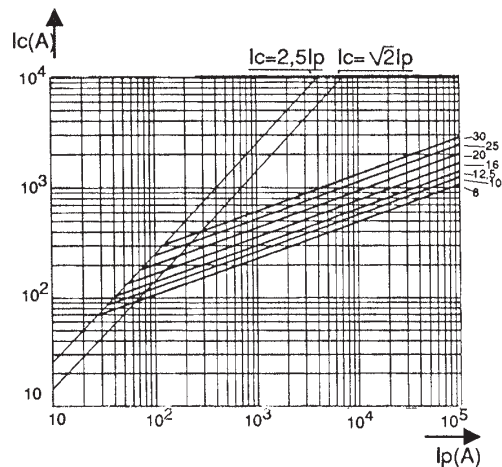



Other Protistor® Fuses Ferrule Fuses 10x38 gRB - 690VAC

Dimensions / Reference / Ref. No. 

Rating (A)	Designation	Ref. Number	Catalog Number
1	6,9 gRC 10-01 - A070 gRC 01 T13	Z330279	FR10GB69V1
1,25	6,9 gRB 10-1,25 - A070 gRB 1.25 T13	X330001	FR10GB69V1.25
1,5	6,9 gRB 10-1,5 - A070 gRB 1.5 T13	Y330002	FR10GB69V1.5
2	6,9 gRB 10-02 - A070 gRB 02 T13	Z330003	FR10GB69V2
2,5	6,9 gRB 10-2,5 - A070 gRB 2.5 T13	A330004	FR10GB69V2.5
3	6,9 gRB 10-03 - A070 gRB 03 T13	B330005	FR10GB69V3
4	6,9 gRB 10-04 - A070 gRB 04 T13	C330006	FR10GB69V4
5	6,9 gRB 10-05 - A070 gRB 05 T13	D330007	FR10GB69V5
6	6,9 gRB 10-06 - A070 gRB 06 T13	E330008	FR10GB69V6
8	6,9 gRB 10-08 - A070 gRB 08 T13	F330009	FR10GB69V8
10	6,9 gRB 10-10 - A070 gRB 10 T13	G330010	FR10GB69V10
12,5	6,9 gRB 10-12,5 - A070 gRB 12.5 T13	H330011	FR10GB69V12.5
16	6,9 gRB 10-16 - A070 gRB 16 T13	J330012	FR10GB69V16
20	6,9 gRB 10-20 - A070 gRB 20 T13	K330013	FR10GB69V20
25	6,9 gRB 10-25 - A070 gRB 25 T13	L330014	FR10GB69V25
30	6,9 gRB 10-30 - A070 gRB 30T13	M330015	FR10GB69V30
32*	6,9 gRB 10-32 - A070 gRB 32T13	Y330278	FR10GB69V32

* Non approval rating

DC working voltage possibilities

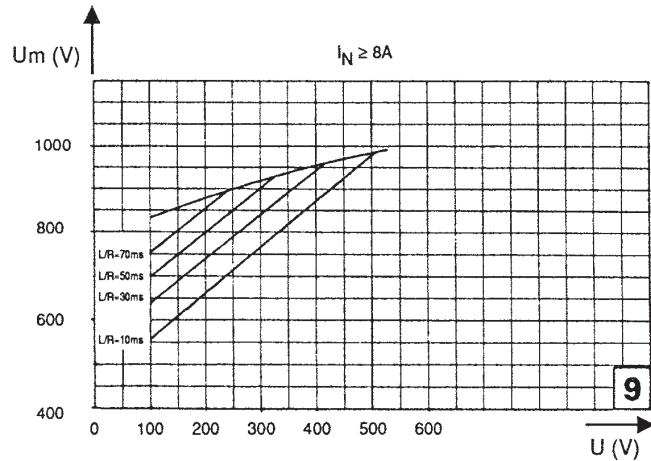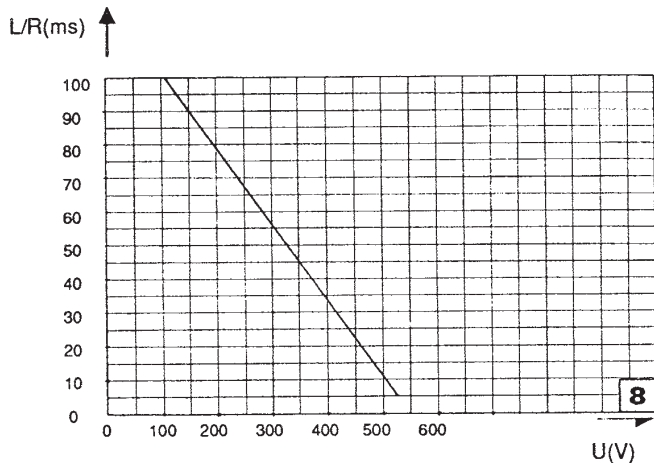

↑ Above: Curve indicating the maximum time constant L/R of the fault path as a function of the DC voltage U , for the rated currents from 1 to 30 A of this range.

Time-current characteristics: Curves indicate, for each rated current, pre-arcing time as a function of RMS value of pre-arcing current I .

Tolerances on this current:

$\pm 10\%$ = ratings from 1 to 6 A


$\pm 9\%$ = ratings from 8 to 30 A

Fuses with "gR" characteristics can eliminate all overloads.

They do not show any minimum breaking capacity but limit currents of non-operation or operation in compliance with standard VDE 636/23.

Cut off characteristics: Curves indicate, for each rated current, the peak value I_c that the current may reach as a function of prospective fault current I_p .

Without trip-indicator
Max. weight 10g
Packaging: per 10 pieces



Other Protistor® Fuses

Ferrule Fuses

10x38 URB/URD/URL - 500 to 600 VAC



Extremely high breaking capacity fuses:
Protection of power semiconductors complying with IEC standard 60269.1 and 4.

500 - 600 VAC voltage rating

aR-CLASS according to VDE 636-23 IEC 60269-4

Without blown fuse indication 0.10 up to 0,80 A**

With trip-indicator (1 to 30 A), a Ferraz Shawmut speciality*

Main Characteristics

Voltage rating U_N (VAC)	Class	Current rating I_N (A)	Pre-arcing $I^t @ 1 \text{ ms}$ I^{tp} (A ² s)	Total clearing $I^t @ U_N$ I^{tt} (A ² s)	Watts loss		Tested breaking capacity
					0.8 I_N	I_N	
600 V without blown fuse indicator	URD **	100 mA	/	1.2 10 ⁻³	0.23	0.4	200 kA @ 600 V
		125 mA		2.3 10 ⁻³	0.25	0.44	
		160 mA		5.2 10 ⁻³	0.28	0.48	
		200 mA		8 10 ⁻³	0.34	0.58	
		250 mA		18 10 ⁻³	0.35	0.60	
		315 mA		33 10 ⁻³	0.42	0.73	
		400 mA		56 10 ⁻³	0.46	0.80	
		500 mA		0.100	0.46	0.80	
		630 mA		0.18	0.52	0.90	
		800 mA		0.44	0.58	1	
500 V with trip-indicator	URD	1 A	0.40	3.6	2.8	0.5	50 kA @ 500 V
		1.25 A	0.13	1.7	0.52	0.91	
		1.6 A	0.31	2.2	0.58	1	
		2 A	0.65	3.1	0.63	1.1	
		2.5 A	1.65	5.9	0.63	1.1	
		3.15 A	2.80	9	0.86	1.5	
		4 A	5.30	16	1.1	1.8	
		5 A	12.7	36	1.1	1.8	
	URD	6 A	1.3	47	0.73	1.35	50 kA @ 500 V
		8 A	2.3	80	0.83	1.55	
		10 A	3.6	110	1	1.9	
		12 A	5.25	150	1.3	2.3	
		16 A	9.30	200	1.7	3.1	
		20 A	16	290	1.7	3.2	
	URL	25 A	37	580	2.9	4.25	50 kA @ 500 V
		30 A	58	900	3.5	5.1	

* minimum operating voltage for trip-indicator: 20 V

** higher ratings without blown fuse indicator see 10x38gRB - 690 VAC




Other Protistor® Fuses

Ferrule Fuses

10x38 URB/URD - 500 to 600 VAC

10.3x38 - Without blown fuse indicator

Current Rating	Designation	Ref. Number	Catalog Number
100 mA	A 060 URD 0.100T13	H077632	A060UD0.100T13
125 mA	A 060 URD 0.125T13	J077633	A060UD0.125T13
160 mA	A 060 URD 0.160T13	K077634	A060UD0.160T13
200 mA	A 060 URD 0.200T13	L077635	A060UD0.200T13
250 mA	A 060 URD 0.250T13	M077636	A060UD0.250T13
315 mA	A 060 URD 0.315T13	N077637	A060UD0.315T13
400 mA	A 060 URD 0.400T13	P077638	A060UD0.400T13
500 mA	A 060 URD 0.500T13*	Q077639	A060UD0.500T13
630 mA	A 060 URD 0.630T13*	R077640	A060UD0.630T13
800 mA	A 060 URD 0.800T13*	S077641	A060UD0.800T13

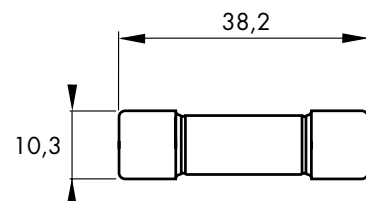


* UL Recognized 

Fuses mounted in clips or fuse disconnectors

10.3x38 - With trip-indicator

Current Rating	Designation	Ref. Number	Catalog Number
1 A	A 050 URD 001 T13 I	P076925	A050URD1T13I
1.25 A	A 050 URD 001.2 T13 I	H076597	A050URD1.2T13I
1.6 A	A 050 URD 001.6 T13 I	G076596	A050URD1.6T13I
2 A	A 050 URD 002 T13 I	Q076926	A050URD2T13I
2.5 A	A 050 URD 002.5 T13 I	F076595	A050URD2.5T13I
3.15 A	A 050 URD 003 T13 I	R076927	A050URD3T13I
4 A	A 050 URD 004 T13 I	S076928	A050URD4T13I
5 A	A 050 URD 005 T13 I	T076929	A050URD5T13I
6 A	A 050 URB 006 T13 I	V076930	A050URB6T13I
8 A	A 050 URB 008 T13 I	W076931	A050URB8T13I
10 A	A 050 URB 010 T13 I	X076932	A050URB10T13I
12 A	A 050 URB 012 T13 I	Y076933	A050URB12T13I
16 A	A 050 URB 016 T13 I	Z076934	A050URB16T13I
20 A	A 050 URB 020 T13 I	A076935	A050URB20T13I
25 A	A 050 URL 025 T13 I	B076936	A050URL25T13I
30 A	A 050 URL 030 T13 I	C076937	A050URL30T13I

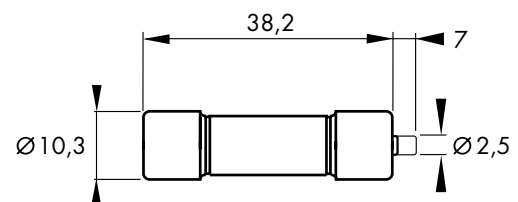


Fuses with trip indicator mounted in clips

Other Protistor® Fuses Ferrule Fuses 10x38 URB/URD - 500 to 600 VAC


Electrical characteristics

Time vs current characteristics

WITHOUT BLOWN FUSE INDICATOR

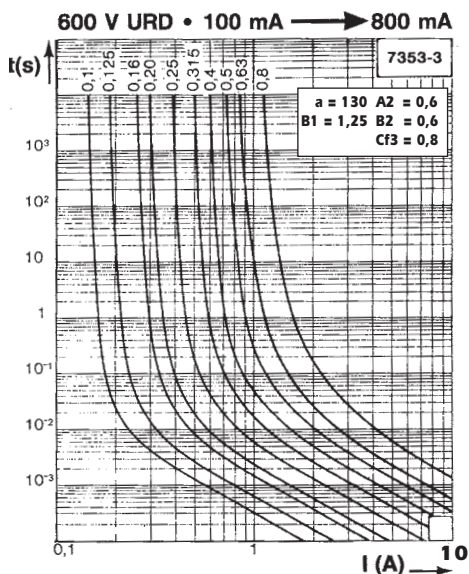


WITH TRIP INDICATOR

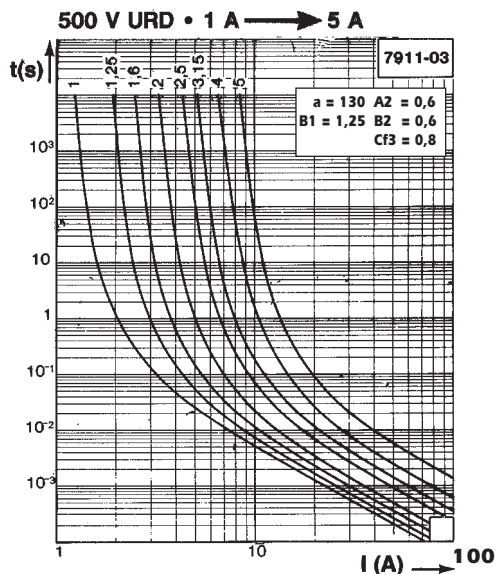


These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.
Tolerance for mean pre-arcing current $\pm 10\%$

WITH TRIP INDICATOR

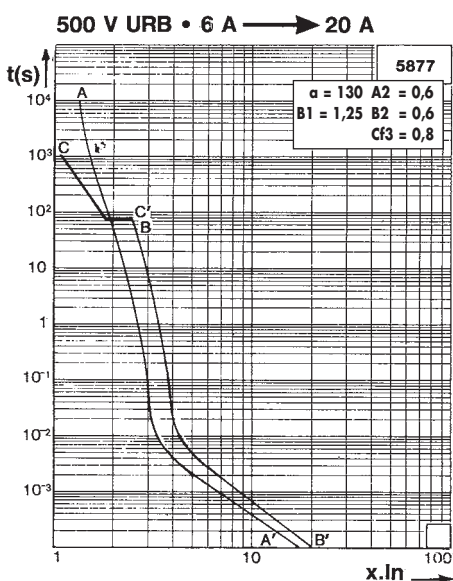

WITH TRIP INDICATOR

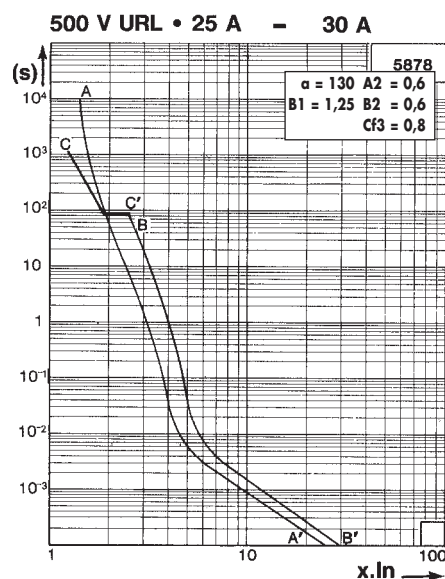

These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.
as a multiple of current rating.




Other Protistor® Fuses

Ferrule Fuses

10x38 URB/URD - 500 to 600 VAC


Corrective factor - Peak arc voltage

Corrective factor




600 V UR
1 : 0.1 up to 0.8 A

These mean curves show the variation of the total clearing time (I^2t_t) and the total clearing duration t_t as a function of operating voltage U.



500 V UR
1 : 1 up to 5 A
2 : 6 up to 30 A


Peak arc voltage

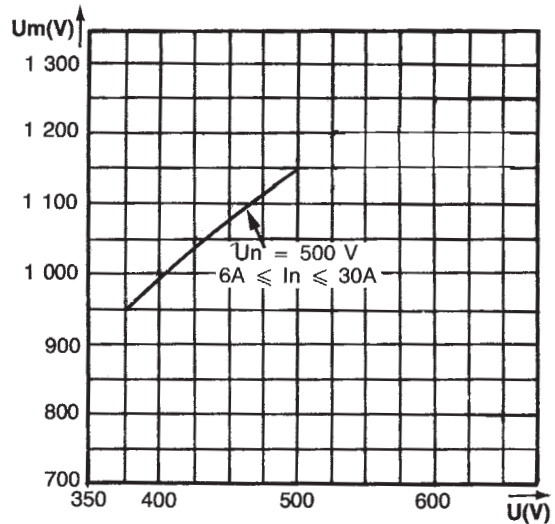


This curve shows the peak value U_m of the arc voltage which appears across the fuse link as a function of the operating voltage U @ $\cos \varphi = 0.15$.

D.C. Application data for fuses with trip indicator

500 V URD $I_N \geq 6A$

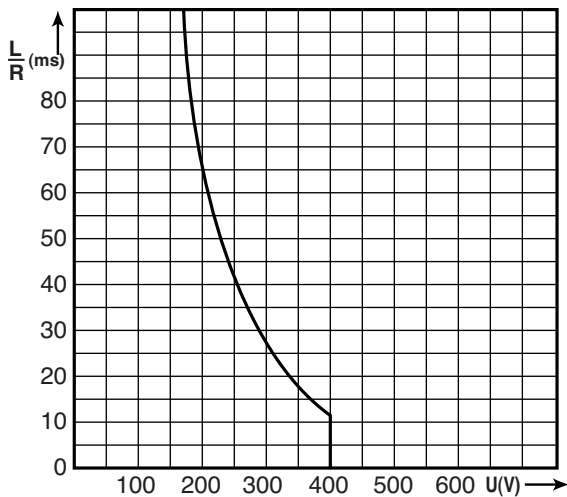

500 V URD $I_N \geq 6A$

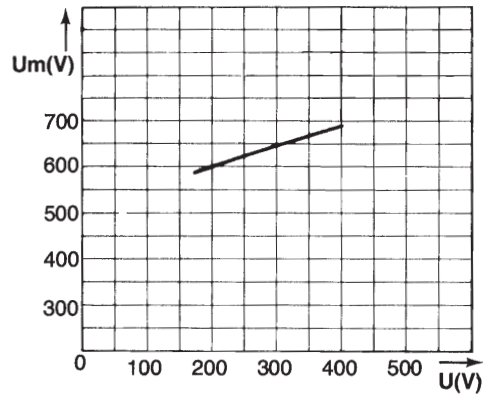

This curve shows the peak value U_m of the arc voltage which appears across the fuse link as a function of the operating voltage U.

Other Protistor® Fuses

Ferrule Fuses

14x51 gRC(URC) - 600 V to 690 VAC



600 - 690 V ~
gRC - URC from 1 to 63 A
Size: 14 x 51

EXTREMELY HIGH BREAKING CAPACITY FUSES: PROTECTION OF SEMICONDUCTORS
COMPLYING WITH IEC STANDARD 60269.1 AND 4

600V - 690 V VOLTAGE RATING (CURRENT RATING 1 TO 50 A)
AS PER IEC 33

gR CLASS (CURRENT RATING 1 TO 50 A) AS PER VDE 636-23

- CLEARING ALL OVERLOADS
- IMPROVED SAFETY AND PROTECTION
- ENABLING SELECTIVE COORDINATION AMONG ALL DISTRIBUTION CIRCUIT FUSES

aR CLASS (CURRENT RATING 63 A) ACCORDING TO VDE 636-23 AND IEC 60269.4

TWO MODELS: WITH OR WITHOUT TRIP-INDICATOR

gRC fuses FROM 8 TO 50 A are 700VAC-DC UL Recognized 

Main Characteristics

Voltage rating U_N U_V	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 \text{ ms}$ I^2tp (A ² s)	Total clearing $I^2t @ U_N$ I^2tt (A ² s)	Watts loss		Tested Breaking capacity	Estimated Breaking capacity
					$0.8 I_N$	I_N		
690	gRC	1	0.8/0.31*	3.5/1.4*	0.17	0.35	100k A @ 690 V	300k A @ 690 V
		2	1.5/1*	6.7/4.3*	0.33	0.60		
		4	7.2/6.7*	33/30*	0.77	1.4		
		6	1.4	19	1.3	2.5		
		8	2.4	30	1.5	3.0		
		10	4.3	44	1.75	3.3		
		12	5.4	65	2.25	4.25		
		16	13	110	2.5	4.8		
		20	27	175	2.75	5.25		
		25	53	300	3.0	5.8		
		32	97	550	3.5	7.0		
		40	210	1210	4.5	8.8		
50	390	2250	5.0	10				
600	URC	63	440	2200	8.0	16	100k A @ 600 V	300k A @ 600 V

* I^2t values for fuses without trip-indicator.

Minimum operating voltage for the trip-indicator : 20 V

See Gears and Fuse gears section

Semiconductor (AC) fuses


Other Protistor® Fuses

Ferrule Fuses

14x51 gRC(URC) - 600 V to 690 VAC

14 X 51 Without trip-indicator


Current Rating	Designation	Ref. Number	Catalog Number
1	6.900 Cp gRC 14.51 1	E221080	FR14GC69V1
2	6.900 Cp gRC 14.51 2	H081473	FR14GC69V2
4	6.900 Cp gRC 14.51 4	J081474	FR14GC69V4
6	6.900 Cp gRC 14.51 6	T220909	FR14GC69V6
8	6.900 Cp gRC 14.51 8	S220908	FR14GC69V8
10	6.900 Cp gRC 14.51 10	R220907	FR14GC69V10
12	6.900 Cp gRC 14.51 12	Q220906	FR14GC69V12
16	6.900 Cp gRC 14.51 16	P220905	FR14GC69V16
20	6.900 Cp gRC 14.51 20	E220735	FR14GC69V20
25	6.900 Cp gRC 14.51 25	N220904	FR14GC69V25
32	6.900 Cp gRC 14.51 32	W220819	FR14GC69V32
40	6.900 Cp gRC 14.51 40	M220903	FR14GC69V40
50	6.900 Cp gRC 14.51 50	L220902	FR14GC69V50

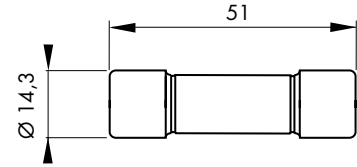

Weight: 18 g
Packaging: 10 pieces

14 X 51 With trip-indicator

1	6.921 Cp gRC 14.51 1	F221081	FR14GC69V1T
2	6.921 Cp gRC 14.51 2	L081476	FR14GC69V2T
4	6.921 Cp gRC 14.51 4	F081517	FR14GC69V4T
6	6.921 Cp gRC 14.51 6	B220939	FR14GC69V6T
8	6.921 Cp gRC 14.51 8	A220938	FR14GC69V8T
10	6.921 Cp gRC 14.51 10	Z220937	FR14GC69V10T
12	6.921 Cp gRC 14.51 12	Y220936	FR14GC69V12T
16	6.921 Cp gRC 14.51 16	X220935	FR14GC69V16T
20	6.921 Cp gRC 14.51 20	W220934	FR14GC69V20T
25	6.921 Cp gRC 14.51 25	V220933	FR14GC69V25T
32	6.921 Cp gRC 14.51 32	V220818	FR14GC69V32T
40	6.921 Cp gRC 14.51 40	M220949	FR14GC69V40T
50	6.921 Cp gRC 14.51 50	N220950	FR14GC69V50T
63	6.21 Cp URC 14.51 63	V220910	FR14UC60V63T


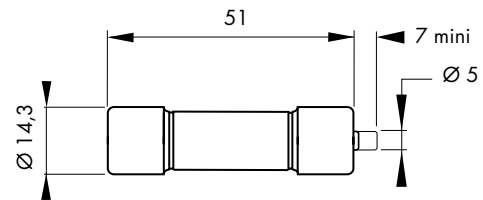


Weight: 18 g
Packaging: 10 pieces



except 1 to 6 and 63A rating

Time vs current characteristics

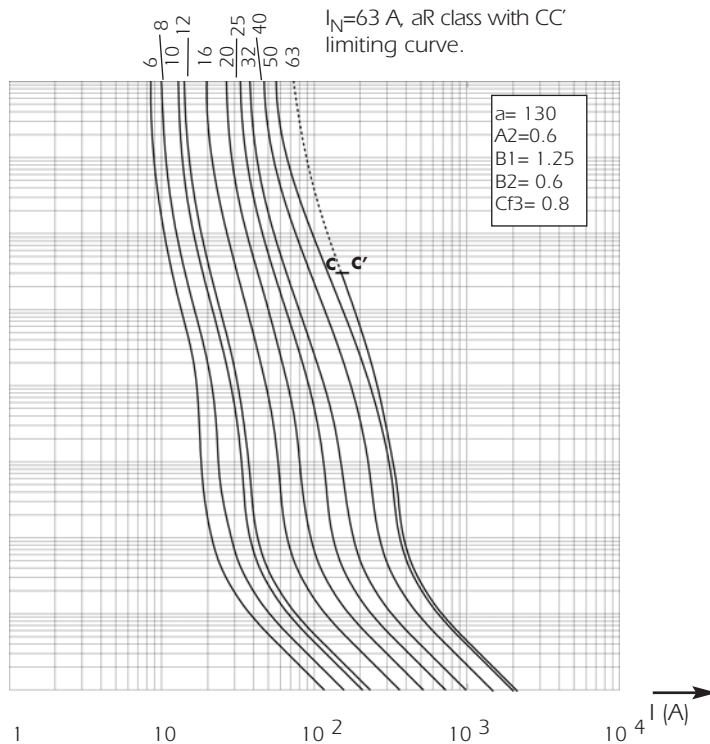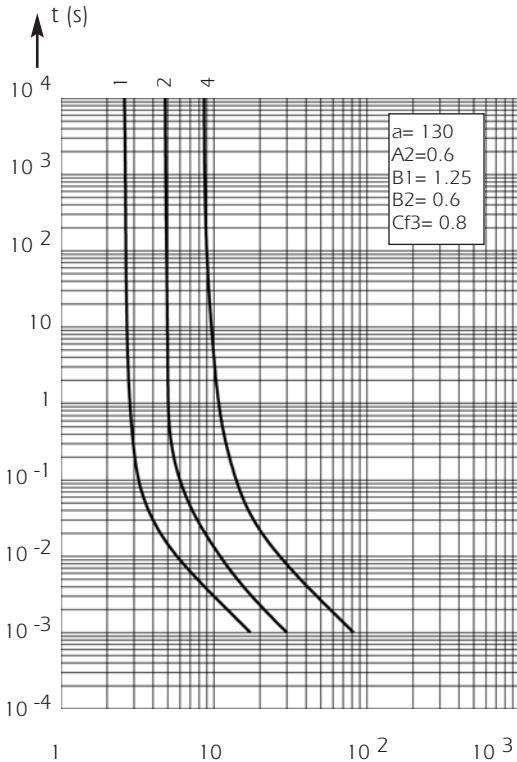


These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current

Tolerance for mean pre-arcing current
± 10% for current rating 1, 2, 4 A
± 8% for current rating 6 to 63 A

Other Protistor® Fuses Ferrule Fuses


14x51 gRC(URC) - 600 V to 690 VAC

Total clearing I²t

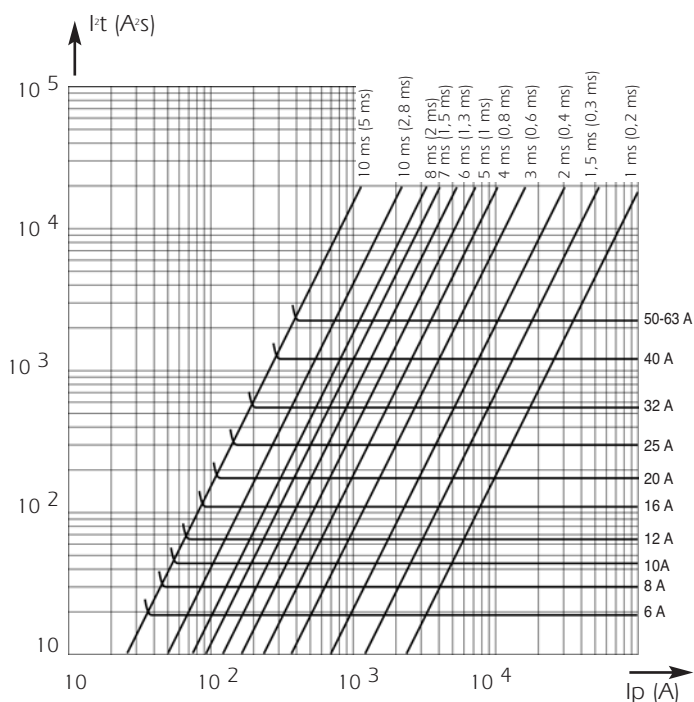


Horizontal curves show maximum values of total clearing I^2t (I^2t_t) for each rated current as a function of prospective current I_p @ 690 V. $\cos \phi = 0.15$ (for 63 A @ 600 V. $\cos \phi = 0.15$).
Oblique lines indicate total clearing duration T_t , with associated pre-arcing duration in brackets.

I²t corrective factor

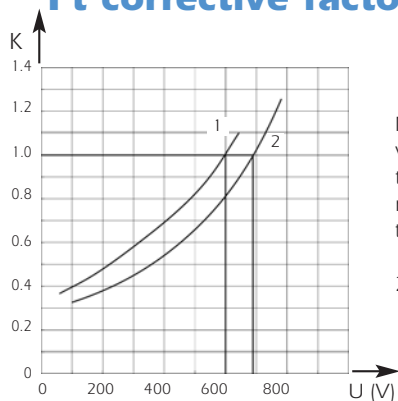



Mean curves showing variation of total clearing time (I^2t_t) and total clearing duration T_t as a function of operating voltage U .
1- 63 A rating - 600 V
2- 1 to 50 A rating - 690 V

Peak arc voltage

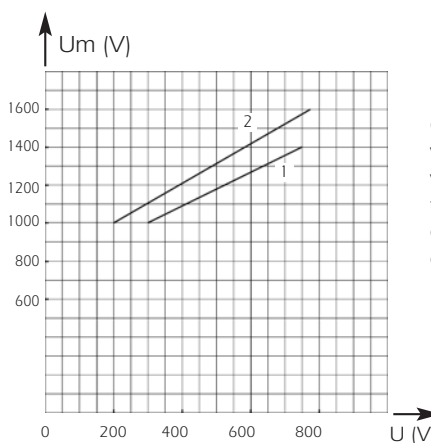

Curves showing peak value U_m of arc voltage which appears across fuse-link as a function of operating voltage U @ $\cos \phi = 0.15$
1-63A rating 600V
2-1 to 50A rating 690V

Current limitation curves

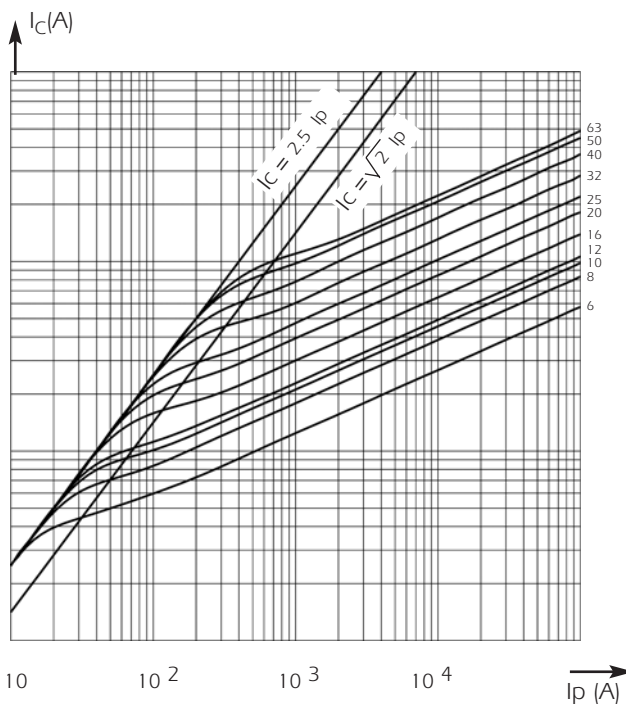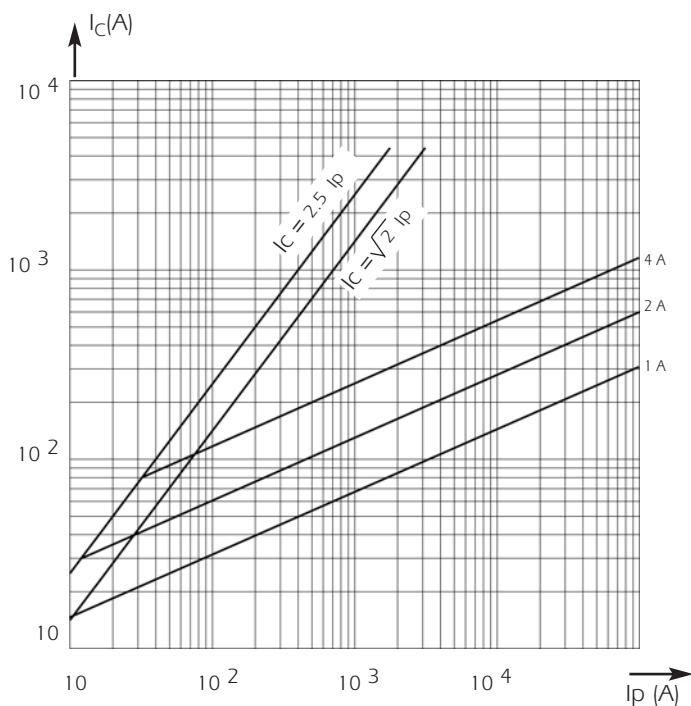

Curves show, for each rating, value of peak let-through current I_c as a function of available fault current I_p .


Semiconductor (AC) fuses

Other Protistor® Fuses

Ferrule Fuses

14x51 gRC(URC) - 600 V to 690 VAC

DC Application data

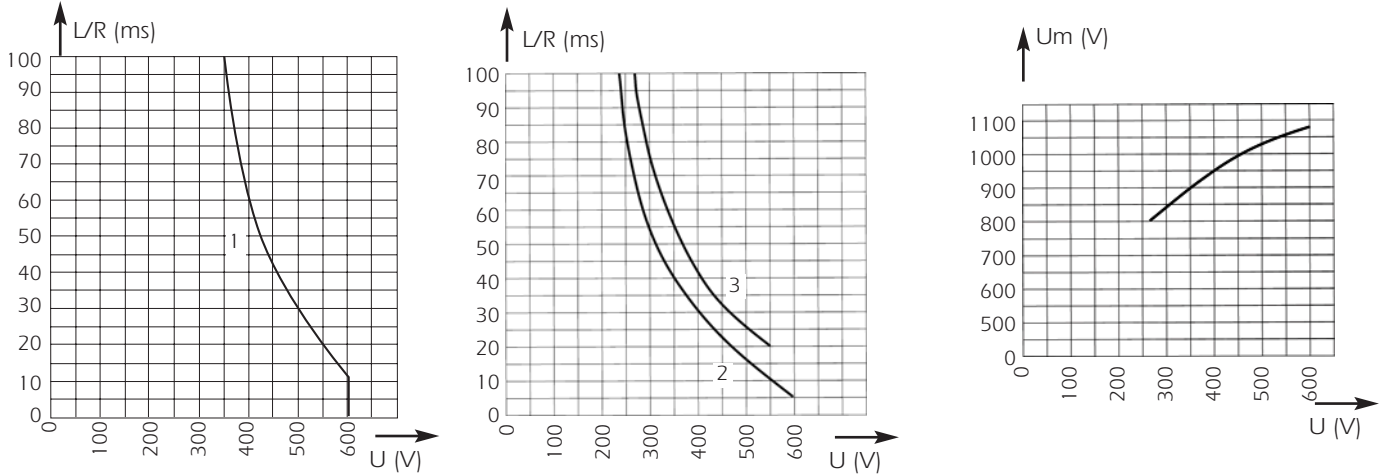

Above, left and center: Curves indicate the permissible value of time constant L/R as a function of DC working voltage:


- 1- For rating 1, 2 and 4 A (gRC) $I_p \geq 1,6 I_N$
- 2- $I_p \geq 1,6 I_N$ for gRC only (rating 6 to 50 A)
- 3- $I_p \geq 2,5 I_N$ for gRC and URC (rating 6 to 63 A)

Above, right: Curve indicates peak arc voltage U_m which may appear across fuse terminals at working voltage U .


NEW gR-CLASS

OPTIMAL PROTECTION OF POWER EQUIPMENT

Thanks to recent technological developments, Ferraz Shawmut today markets gR-class PROTISTOR® fuses capable of clearing all types of overloads, from low multiples of current ratings up to very high short-circuit currents. Enhanced performance enables these fuses to provide solutions to many previously unsolved problems in power electronics: protection of cables without the use of additional components, protection of equipment from fire hazards, selective coordination of different fuses within a single power distribution installation...

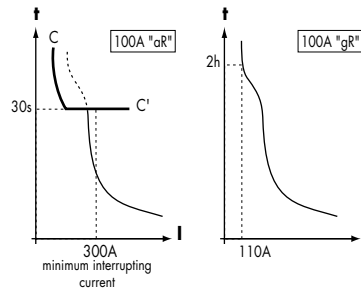


Example:
100A aR vs. 100A gR

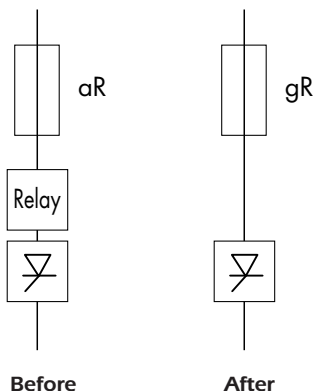

SELECTIVE COORDINATION

gR-class semiconductor fuses can be utilized in association with gI and gG-class low voltage power distribution fuses of the same current rating, installed upstream. In a "selectively coordinated" distribution installation, melting is limited to the fuse associated with the faulted circuit, while upstream fuses remain intact. This prevents unnecessary down-time due to power blackouts in non-faulted branches.

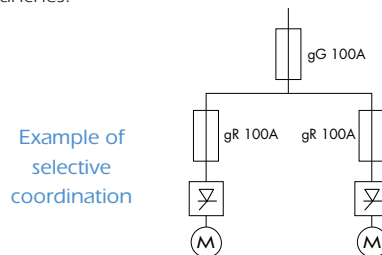

aR-CLASS vs. gR-CLASS

aR-class fuses feature a high minimum interrupting current as compared with their current rating. The primary time-current characteristic of aR-class fuses is the CC' curve, above which another protection device must be associated. The gR-class fuse represents considerably improved performance in semiconductor protection

FERRAZ SHAWMUT EXPERTISE

gR-class fuses should be used in the design of low voltage equipment and in the protection of power electronics equipment. Designers can often substitute a gR-class fuse for an aR-class fuse (10x38, 14x51, 22x58, PSC 000 and 17x49 DIN80 or BS 88-4) but the reverse is not true: an aR fuse can never replace a gR fuse. Start protecting your new equipment with gR-class fuses today. The application of gR class fuses, with current ratings less than 100 Amps, offers enhanced protection, safety and reliability, along with reduced risk of replacement errors and assembly costs.

Other Protistor® Fuses

Ferrule Fuses

22x58 gRC (URD) - 600 V to 690 VAC

EXTREMELY BREAKING CAPACITY RATING FUSES: PROTECTION OF SEMICONDUCTORS

IN COMPLIANCE WITH IEC STANDARD 60269.1 AND 4

600 - 690 V VOLTAGE RATING (CURRENT RATING 12 TO 135 A)
AS PER IEC 33

gR CLASS (CURRENT RATING 12 TO 100 A) ACCORDING TO VDE 636-23

- CLEARING ALL OVERLOADS
- IMPROVED SAFETY AND PROTECTION
- ENABLING SELECTIVE COORDINATION AMONG ALL DISTRIBUTION CIRCUIT FUSES

aR CLASS (CURRENT RATING 125 AND 135 A) AS PER VDE 636-23 AND IEC 60269.4

TWO MODELS COMPLYING WITH NF C 63210 AND 63211
WITH OR WITHOUT TRIP-INDICATOR

gRC FUSES ARE 700VAC-DC UL RECOGNIZED



Main Characteristics

Voltage rating U_N (V)	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 \text{ ms}$ I^2_{tp} (A ² s)	Total clearing $I^2t @ U_N$ I^2_{tt} (A ² s)	Watts loss		Tested Breaking capacity	Estimated Breaking capacity
					$0.8 I_N$	I_N		
690	gRC	20	17	125	4.0	6.5	100k A @ 690 V	300k A @ 690 V
		25	39	280	4.5	7.5		
		32	72	490	5.0	9.0		
		40	118	785	5.5	10		
		50	242	1390	7.0	11.5		
		63	430	2460	8.0	13.5		
		80	970	5565	9.0	15.5		
100	2080	11950	10	17				
600	URD	125	2900	14000	14	22	100k A @ 600 V	300k A @ 600 V
		135	3360	17700	15	25		

Minimum operating voltage for the trip-indicator: 20 V

See Fuse Blocks and Fuse Holders section

Semiconductor (AC) fuses


Other Protistor® Fuses

Ferrule Fuses

22x58 gRC (URD) - 600 V to 690 VAC

22 X 58 Without trip-indicator


Current rating	Designation	Ref. Number	Catalog Number
12	6,900 CP gRC 22.58 12	F232719	FR22GC69V12
16	6,900 CP gRC 22.58 16	G232720	FR22GC69V16
20	6,900 CP gRC 22.58 20	C220940	FR22GC69V20
25	6,900 CP gRC 22.58 25	B220916	FR22GC69V25
32	6,900 CP gRC 22.58 32	A220915	FR22GC69V32
40	6,900 CP gRC 22.58 40	Z220914	FR22GC69V40
50	6,900 CP gRC 22.58 50	Y220913	FR22GC69V50
63	6,900 CP gRC 22.58 63	X220912	FR22GC69V63
80	6,900 CP gRC 22.58 80	Y220821	FR22GC69V80
100	6,900 CP gRC 22.58 100	W220911	FR22GC69V100

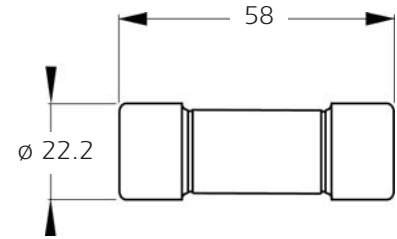

Weight: 57 g
Packaging: 10 pieces

22 X 58 With trip-indicator

20	6,921 CP gRC 22.58 20	D220734	FR22GC69V20T
25	6,921 CP gRC 22.58 25	G220921	FR22GC69V25T
32	6,921 CP gRC 22.58 32	F220920	FR22GC69V32T
40	6,921 CP gRC 22.58 40	E220919	FR22GC69V40T
50	6,921 CP gRC 22.58 50	D220918	FR22GC69V50T
63	6,921 CP gRC 22.58 63	C220733	FR22GC69V63T
80	6,921 CP gRC 22.58 80	X220820	FR22GC69V80T
100	6,921 CP gRC 22.58 100	C220917	FR22GC69V100T
125	621 CP URD 22.58 125	A220708	FR22UD60V125T
135	621 CP URD 22.58 135	B220709	FR22UD60V135T

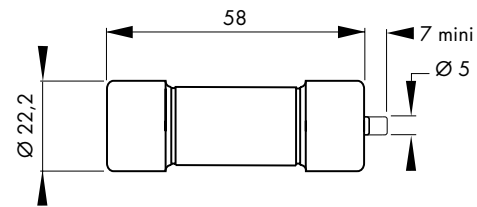


Weight: 57 g
Packaging: 10 pieces




except 125 and 135A rating

Electrical characteristics

Time vs current characteristics

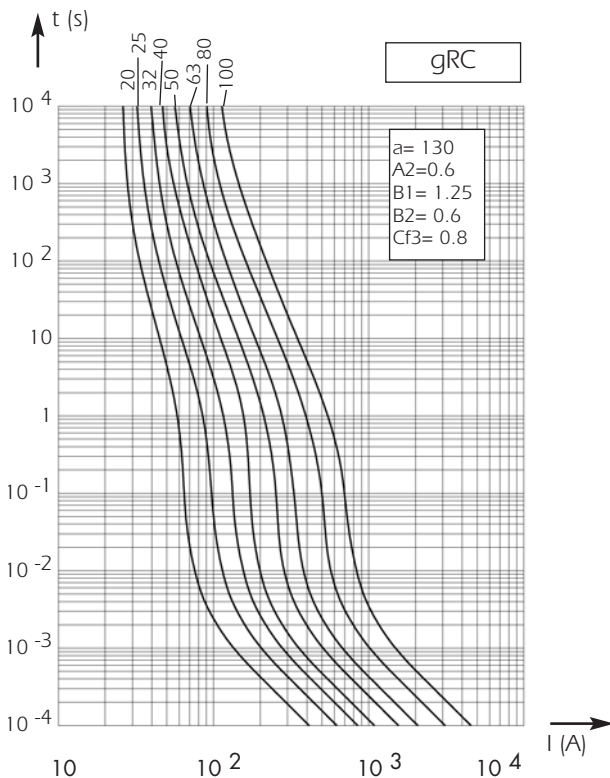


These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current

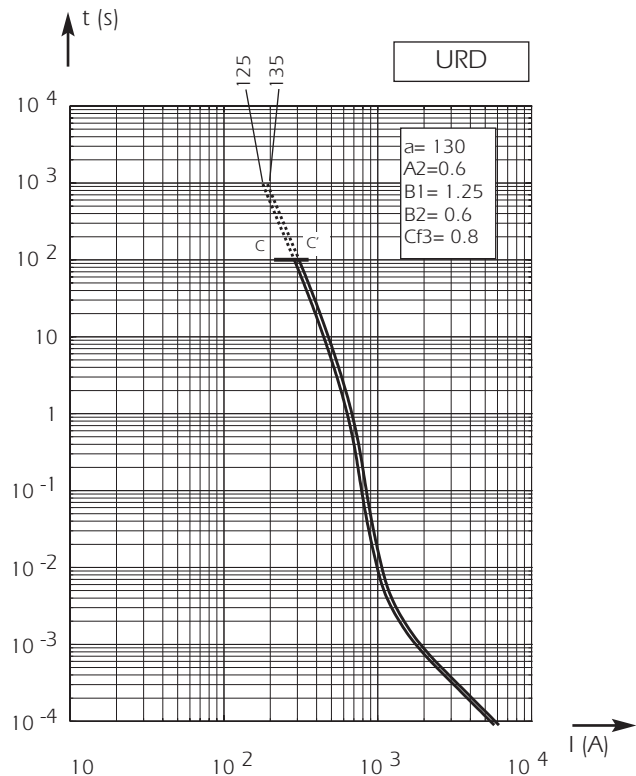

Tolerance for mean pre-arcing current $\pm 9\%$ for all current ratings


Other Protistor® Fuses Ferrule Fuses 22x58 gRC (URD) - 600 V to 690 VAC

Total clearing I²t

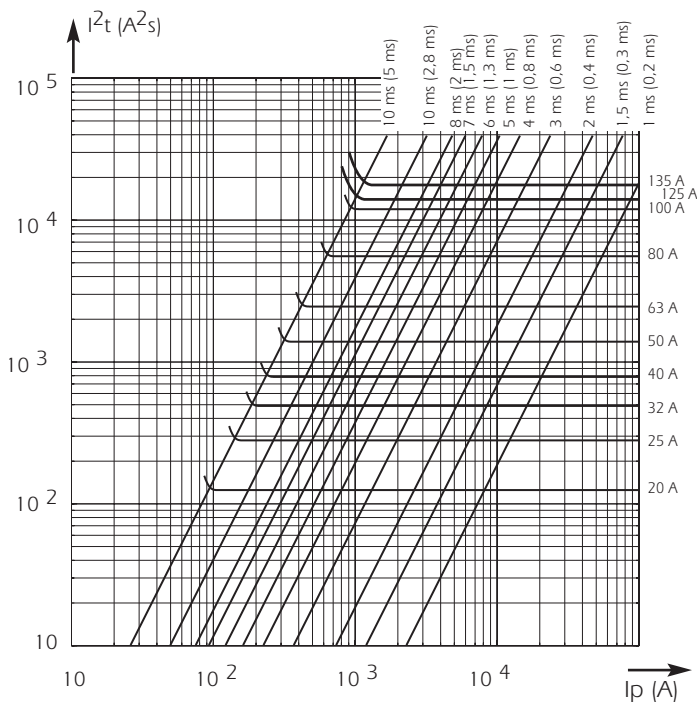


Above: Horizontal curves show, for each rated current, maximum values of total clearing I^2t (I^2t_t) as a function of prospective current I_p @ 690 V. $\cos\phi = 0.15$ (125-135 A @ 600 V. $\cos\phi = 0.15$)
Oblique lines indicate total clearing duration T_t with associated pre-arcing duration in brackets.

I²t corrective factor

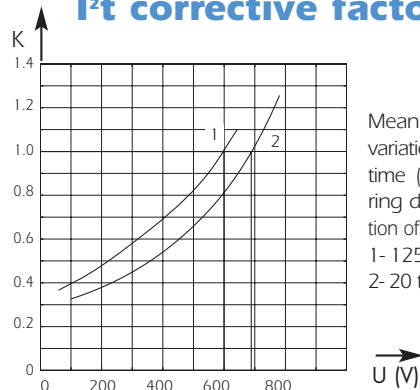


Mean curves showing variation of total clearing time (I^2t_t) and total clearing duration T_t as a function of operating voltage U .
1- 125 and 135 A rating
2- 20 to 100 A rating

Peak arc voltage

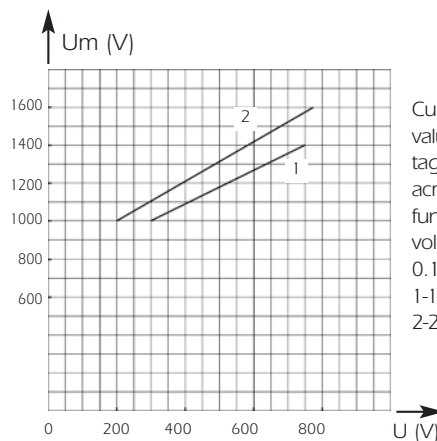

Curve showing peak value U_m of arc voltage which appears across fuse-link as a function of operating voltage U @ $\cos\phi = 0.15$
1-125 and 135A rating
2-20 to 100A rating

Current limitation curves

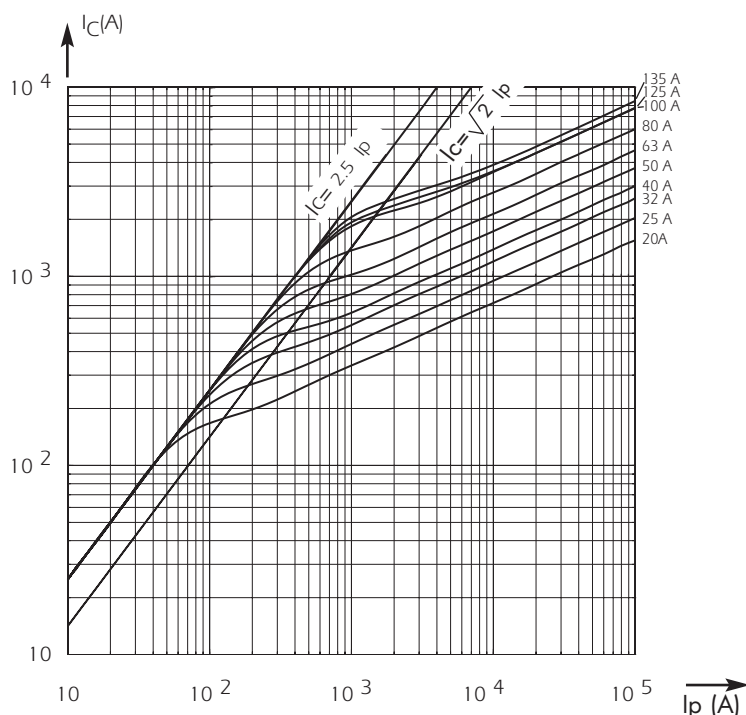

Left: Curves show value of peak let-through current I_c as a function of the available fault current I_p .


Semiconductor (AC) fuses

Other Protistor® Fuses

Ferrule Fuses

22x58 gRC (URD) - 600 V to 690 VAC


DC Application data

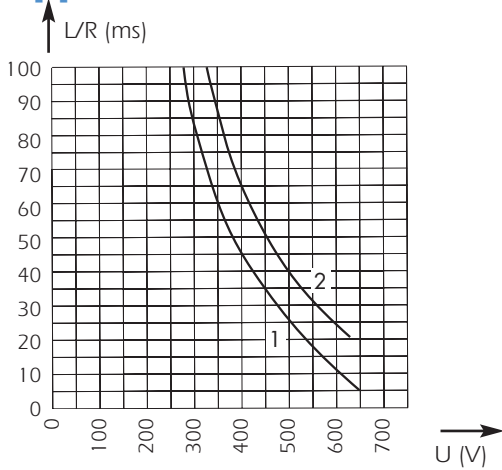

Ces courbes indiquent la constante de temps L/R maximale admissible en fonction de la tension d'utilisation

Courbe 1 : $I_p \geq 1,6 I_n$ pour fusibles gRC uniquement (calibres de 12 à 100 A)

Courbe 2 : $I_p \geq 2,5 I_n$ pour fusibles gRC et URD

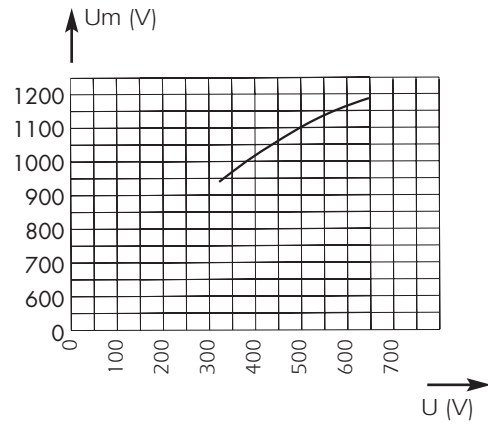


Above: Curve indicates peak arc voltage U_m which may appear across fuse terminals at working voltage U.


NEW gR-CLASS

OPTIMAL PROTECTION OF POWER EQUIPMENT

Thanks to recent technological developments, Ferraz Shawmut today markets gR-class PROTISTOR® fuses capable of clearing all types of overloads, from low multiples of current ratings up to very high short-circuit currents. Enhanced performance enables these fuses to provide solutions to many previously unsolved problems in power electronics: protection of cables without the use of additional components, protection of equipment from fire hazards, selective coordination of different fuses within a single power distribution installation...




Example:
100A aR vs. 100A gR

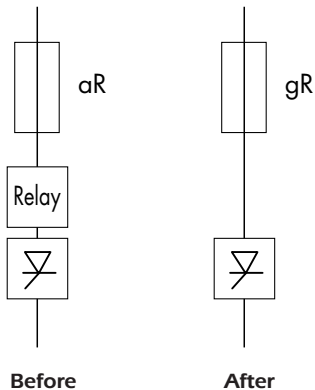

SELECTIVE COORDINATION

gR-class semiconductor fuses can be utilized in association with gI and gG-class low voltage power distribution fuses of the same current rating, installed upstream. In a "selectively coordinated" distribution installation, melting is limited to the fuse associated with the faulted circuit, while upstream fuses remain intact. This prevents unnecessary down-time due to power blackouts in non-faulted branches.

Example of
selective
coordination



aR-CLASS vs. gR-CLASS

aR-class fuses feature a high minimum interrupting current as compared with their current rating. The primary time-current characteristic of aR-class fuses is the CC' curve, above which another protection device must be associated. The gR-class fuse represents considerably improved performance in semiconductor protection

FERRAZ SHAWMUT EXPERTISE

gR-class fuses should be used in the design of low voltage equipment and in the protection of power electronics equipment. Designers can often substitute a gR-class fuse for an aR-class fuse (10x38, 14x51, 22x58, PSC 000 and 17x49 DIN80 or BS 88-4) but the reverse is not true: an aR fuse can never replace a gR fuse. Start protecting your new equipment with gR-class fuses today. The application of gR class fuses, with current ratings less than 100 Amps, offers enhanced protection, safety and reliability, along with reduced risk of replacement errors and assembly costs.

Other Protistor® Fuses Ferrule Fuses

14x51 & 22x58 URC / URD - 600 to 690 VAC



EXTREMELY BREAKING CAPACITY RATING FUSES:
PROTECTION OF POWER SEMI CONDUCTORS COMPLYING WITH IEC STANDARD 60269.1 AND 4

600 - 690 V AC VOLTAGE RATING

aR-CLASS ACCORDING TO VDE 636-23 AND IEC 60269.4

WITH AND WITHOUT TRIP-INDICATOR FOR SIZES 14 x 51 AND 22 x 58

UL RECOGNIZED (EXCEPT 6 A)*

Main Characteristics

Voltage rating U_N (VAC)	Size	Class	Current rating I_N (A)	Pre-arcing $2t @ 1 ms$ I^2t_p (A ² s)	Total clearing $I^2t @$ (A ² s)		Watts loss		Breaking Capacity
					$7 I_N < I_p < 30 I_N$	$I_p \geq 30 I_N$	$0.8 I_N$	I_N	
690 V	14 x 51	URC	6	1.3	17.5* @ 660V		1.1	2	100 kA @ 690 V
			8	2.4	27.5@ 660V		1.6	2.8	
			10	4.3	40@ 660V		2	3.5	
			12	5.4	60@ 660V		2.45	4.4	
			16	13.2	100@ 660V		2.7	4.8	
			20	27	160@ 660V		2.9	5.2	
			25	53	275@ 660V		3.2	5.8	
			32	98	500@ 660V		3.9	7	
			40 (1) 50 (1)	130 280	700@ 660V 1500@ 660V		6 6.3	10.7 11.6	
690 V	14 x 51	URD	40 (2) 50 (2)	130 280	7 IN < I_p < 30 IN		6 6.3	10.7 11.6	100 kA @ 690 V
					$I_p \geq 30 IN$				
					850@660V 1850@660V	700@660V 1500@660V			
690 V	22 x 58	URD	25	22	125@ 660V		5.2	10	100 kA @ 690 V
			32	49	275@ 660V		5.7	11	
			40	88	480@ 660V		6.8	13	
			50	155	800@ 660V		7.8	14.9	
			63	350	1850@ 660V		8.4	16	
			80	730	3800@ 660V		9.4	17,8	
600 V	22X58	URD	125	2900	14000@600V		14	22	100 kA @ 600 V
			130	3360	17700@600V		15	25	

* Without trip-indicator $I^2t : 15 A^2s$.

(1) No trip-indicator available for this model.

(2) Models available only with trip-indicator.



Other Protistor® Fuses


Ferrule Fuses

14x51 & 22x58 URC / URD - 600 to 690 VAC

All the fuses presented on this page are (except 6 A)* 

14x51 - Without blown fuse indication


Current Rating	Designation	Ref. Number	Catalog Number
6 A	6.900 CP URC 14.51/6*	K081475	FR14UC69V6
8 A	6.900 CP URC 14.51/8	S093902	FR14UC69V8
10 A	6.900 CP URC 14.51/10	T093903	FR14UC69V10
12 A	6.900 CP URC 14.51/12	V093904	FR14UC69V12
16 A	6.900 CP URC 14.51/16	W093905	FR14UC69V16
20 A	6.900 CP URC 14.51/20	X093906	FR14UC69V20
25 A	6.900 CP URC 14.51/25	Y093907	FR14UC69V25
32 A	6.900 CP URC 14.51/32	Z093908	FR14UC69V32
40 A	6.900 CP URC 14.51/40	A093909	FR14UC69V40
50 A	6.900 CP URC 14.51/50	B093910	FR14UC69V50



Weight : 18g
Packaging : 10 pieces

14x51 - With trip-indicator


Current Rating	Designation	Ref. Number	Catalog Number
6 A	6.921 CP URC 14.51/6*	G081518	FR14UC69V6T
8 A	6.921 CP URC 14.51/8	C093911	FR14UC69V8T
10 A	6.921 CP URC 14.51/10	D093912	FR14UC69V10T
12 A	6.921 CP URC 14.51/12	E093913	FR14UC69V12T
16 A	6.921 CP URC 14.51/16	F093914	FR14UC69V16T
20 A	6.921 CP URC 14.51/20	G093915	FR14UC69V20T
25 A	6.921 CP URC 14.51/25	H093916	FR14UC69V25T
32 A	6.921 CP URC 14.51/32	J093917	FR14UC69V32T
40 A	6.921 CP URD 14.51/40	T100136	FR14UD69V40T
50 A	6.921 CP URD 14.51/50	V100137	FR14UD69V50T

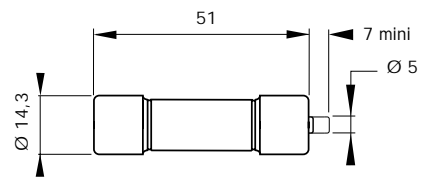

Weight : 18g
Packaging : 10 pieces

22x58 - Without blown fuse indication


Current Rating	Designation	Ref. Number	Catalog Number
25 A	6.900 CP URD 22x58/25	B093956	FR22UD69V25
32 A	6.900 CP URD 22x58/32	Z094828	FR22UD69V32
40 A	6.900 CP URD 22x58/40	S094822	FR22UD69V40
50 A	6.900 CP URD 22x58/50	W094779	FR22UD69V50
63 A	6.900 CP URD 22x58/63	T094823	FR22UD69V63
80 A	6.900 CP URD 22x58/80	A094829	FR22UD69V80
100 A	6.900 CP URD 22x58/100	Y094827	FR22UD69V100



Weight: 57 g
Packaging: 10 pieces

22x58 - With trip-indicator

Current Rating	Designation	Ref. Number	Catalog Number
25 A	6,921 CP URD 22x58/ 25	H093801	FR22UD69V25T
32 A	6,921 CP URD 22x58/ 32	C093957	FR22UD69V32T
40 A	6,921 CP URD 22x58/ 40	J093802	FR22UD69V40T
50 A	6,921 CP URD 22x58/ 50	D093958	FR22UD69V50T
63 A	6,921 CP URD 22x58/ 63	K093803	FR22UD69V63T
80 A	6,921 CP URD 22x58/ 80	E093959	FR22UD69V80T
100 A	6,921 CP URD 22x58/100	F093960	FR22UD69V100T
125 A	621 CP URD 22x58/125	A220708	FR22UD60V125T
135 A	621 CP URD 22x58/135	B220709	FR22UD60V135T

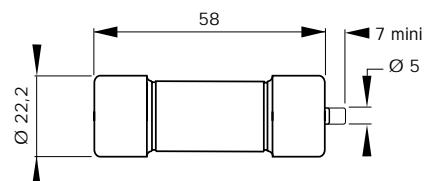


Weight: 57 g
Packaging: 10 pieces

Fuseholder Solution: See Gears and Fuse gears section

Other Protistor® Fuses Ferrule Fuses

14x51 & 22x58 URC / URD - 600 to 690 VAC

Time vs current characteristics

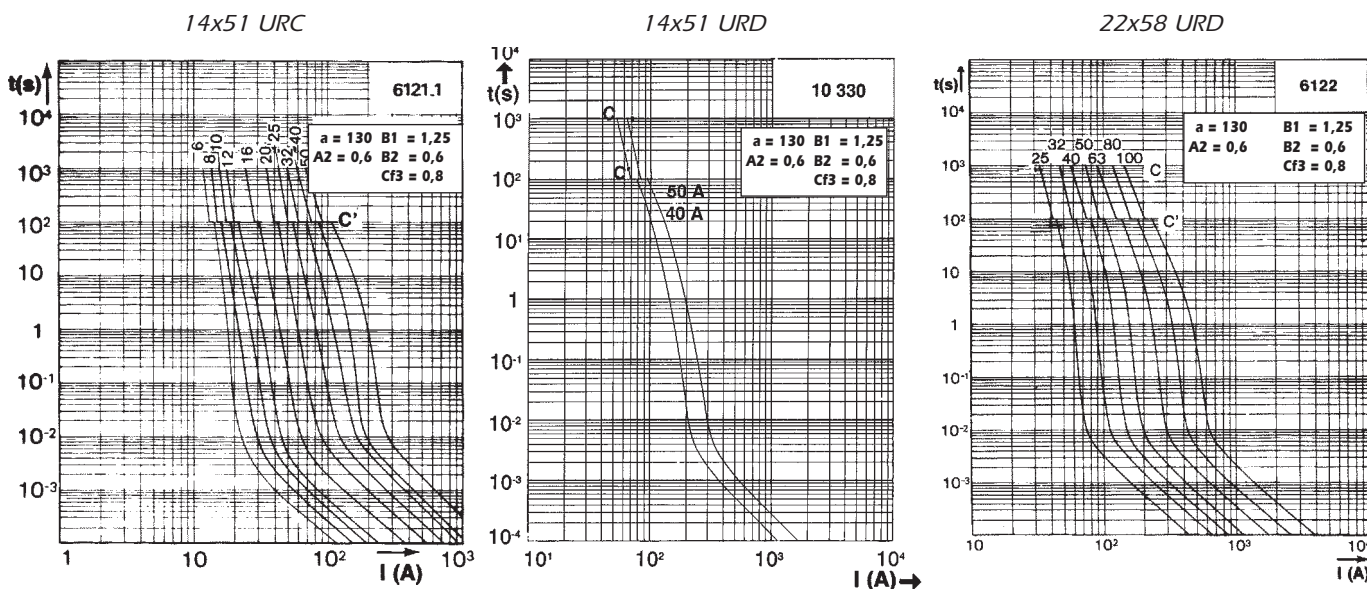


These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.

Tolerance for mean pre-arcing current $\pm 10\%$


Corrective factor - Peak arc voltage

Corrective factor


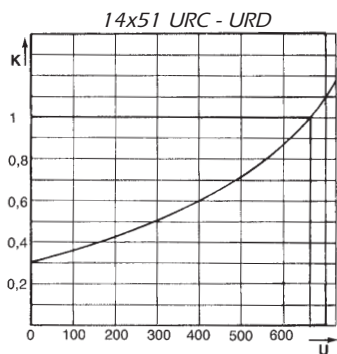


The mean curves show the variation of the total clearing Pt_t and the total clearing duration t_t as a function of operating voltage U .

Peak arc voltage

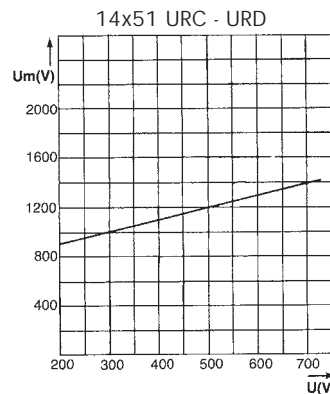

This curve shows the peak value U_m of the arc voltage which appears across the fuse-link as a function of the operating voltage $U @ \cos j = 0.15$.

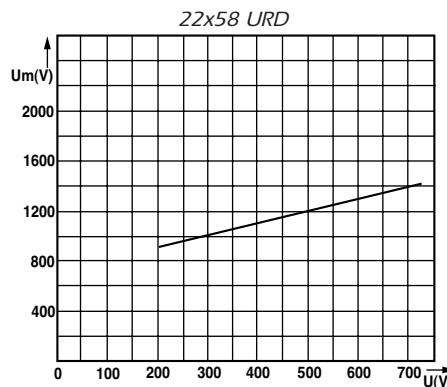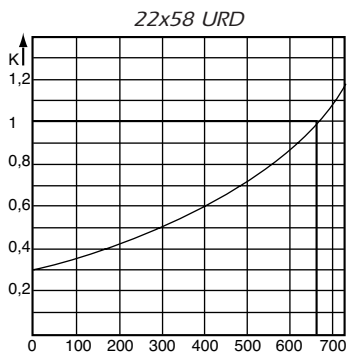




Other Protistor® Fuses

Ferrule Fuses


14x51 & 22x58 URC / URD - 600 to 690 VAC

DC Application data

14x51 URC - URD

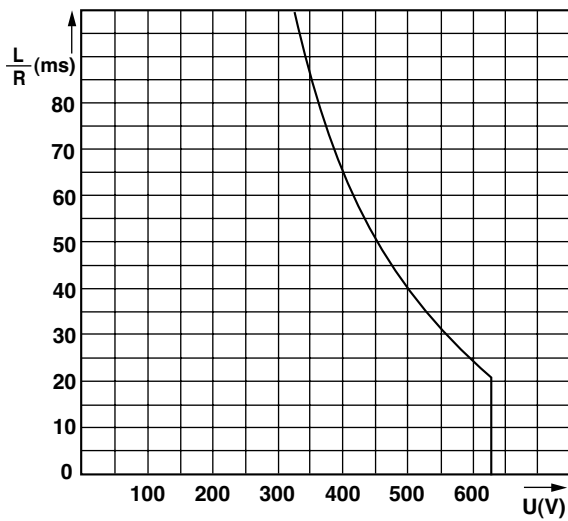


14x51 URC - URD

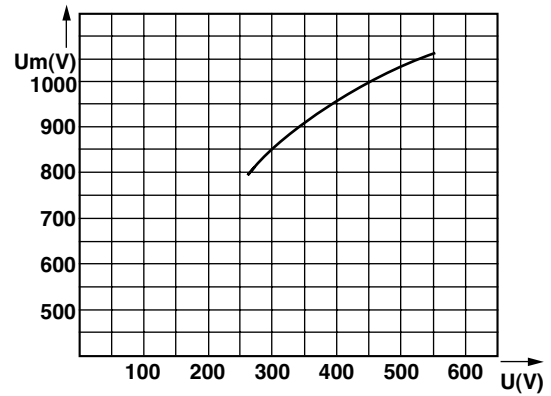


Minimum breaking current: see time-current characteristics

22x58 URD

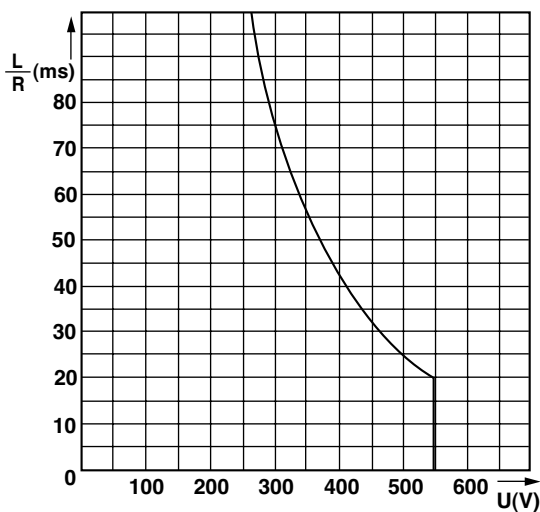

22x58 URD

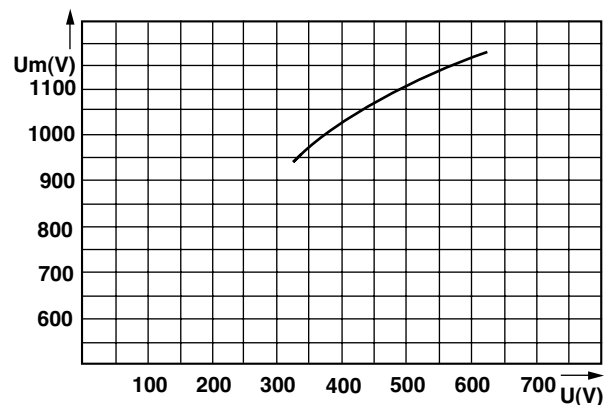

This curve indicates the permissible value of time constant L/r as a function of DC working voltage

This curve shows the peak value U_m of the arc voltage which appears across the fuse-link as a function of the operating voltage U .

Other Protistor® Fuses Ferrule Fuses

14x51 URGB & 22x58 URGA - 600 V to 690 VAC



EXTREMELY HIGH BREAKING CAPACITY FUSES:
PROTECTION OF POWER SEMICONDUCTORS AS PER
IEC STANDARD 60269.1 AND 4

600 V - 690 V AC VOLTAGE RATING

aR CLASS AS PER VDE 636-23 AND IEC 60269.4

WITH AND WITHOUT TRIP-INDICATOR
FOR SIZES 14 x 51 AND 22 x 58

Main Characteristics

Voltage rating U_N (VAC)	Size	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 ms$ I^2tp (A ² s)	Total clearing $I^2t @ A^2s$		Watts loss		Tested Breaking capacity
					660 V		0,8 I_N	I_N	
					$I_p \leq 30 I_N$	$I_p > 30 I_N$			
690 V	14 x 51	URGB	8	3.3	20	17	1.45	2.7	200 kA @ 690 V
			10	6.0	37	30	1.85	3.4	
			12	9.3	75	60	2.5	4.6	
			16	15.6	95	75	3.4	6.2	
			20	30.0	175	145	4	7.4	
			25	53.5	300	250	4.7	8.6	
			32	100	550	460	5.7	10.6	
			40	214	1150	940	6.2	11.5	
	50	480	2550	2070	7	13			
	22 x 58	URGA	25	45	210		4.7	8.5	
			32	84	400		5.7	10.3	
			40	150	700		7.1	12.8	
			50	270	1270		8.7	15.7	
			63	595	2770		9.8	17.7	
80			1165	5500		12	21.7		
600* - 690 V	22 x 58	URGA	100*	2150	9000*		14.2	25.6	200 kA @600 V

*Operating voltage limited to 600 V for the model with blown fuse trip-indicator / Total clearing $I^2t @ 600 V = 9000 A^2s$
Minimum operating voltage for built-in trip-indicator: 20 V



Other Protistor® Fuses


Ferrule Fuses

14x51 URGB & 22x58 URGA - 600 V to 690 VAC

References

14x51 - Without blown fuse trip-indicator


Current Rating	Designation	Ref. Number	Catalog Number
8 A	6.900 CP URGB 14.51/8	T078033	FR14UB69V8
10 A	6.900 CP URGB 14.51/10	V078034	FR14UB69V10
12 A	6.900 CP URGB 14.51/12	W078035	FR14UB69V12
16 A	6.900 CP URGB 14.51/16	X078036	FR14UB69V16
20 A	6.900 CP URGB 14.51/20	Y078037	FR14UB69V20
25 A	6.900 CP URGB 14.51/25	Z078038	FR14UB69V25
32 A	6.900 CP URGB 14.51/32	A078039	FR14UB69V32
40 A	6.900 CP URGB 14.51/40	B078040	FR14UB69V40
50 A	6.900 CP URGB 14.51/50	C078041	FR14UB69V50



Weight: 18 g
Packaging: 10 pieces

14x51 - With trip-indicator


Current Rating	Designation	Ref. Number	Catalog Number
8 A	6.921 CP URGB 14.51/8	D078042	FR14UB69V8T
10 A	6.921 CP URGB 14.51/10	E078043	FR14UB69V10T
12 A	6.921 CP URGB 14.51/12	F078044	FR14UB69V12T
16 A	6.921 CP URGB 14.51/16	G078045	FR14UB69V16T
20 A	6.921 CP URGB 14.51/20	H078046	FR14UB69V20T
25 A	6.921 CP URGB 14.51/25	J078047	FR14UB69V25T
32 A	6.921 CP URGB 14.51/32	K078048	FR14UB69V32T
40 A	6.921 CP URGB 14.51/40	L078049	FR14UB69V40T
50 A	6.921 CP URGB 14.51/50	M078050	FR14UB69V50T

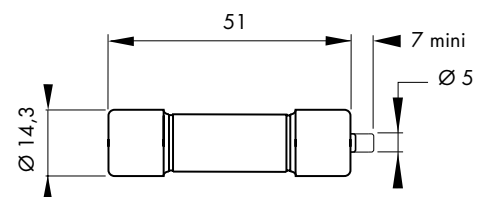

Weight: 18 g
Packaging: 10 pieces

22x58 - Without blown fuse trip-indicator


Current Rating	Designation	Ref. Number	Catalog Number
25 A	6.900 CP URGA 22.58/25	C095245	FR22UA69V25
32 A	6.900 CP URGA 22.58/32	D095246	FR22UA69V32
40 A	6.900 CP URGA 22.58/40	E095247	FR22UA69V40
50 A	6.900 CP URGA 22.58/50	F095248	FR22UA69V50
63 A	6.900 CP URGA 22.58/63	G095249	FR22UA69V63
80 A	6.900 CP URGA 22.58/80	H095250	FR22UA69V80
100 A	6.900 CP URGA 22.58/100	N078051	FR22UA69V100

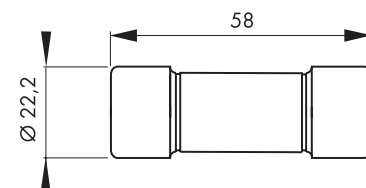

Weight: 57 g
Packaging: 10 pieces

22x58 - With trip-indicator

Current Rating	Designation	Ref. Number	Catalog Number
25 A	6.921 CP URGA 22.58/25	T095260	FR22UA69V25T
32 A	6.921 CP URGA 22.58/32	V095261	FR22UA69V32T
40 A	6.921 CP URGA 22.58/40	W095262	FR22UA69V40T
50 A	6.921 CP URGA 22.58/50	X095263	FR22UA69V50T
63 A	6.921 CP URGA 22.58/63	Y095264	FR22UA69V63T
80 A	6.921 CP URGA 22.58/80	Z095265	FR22UA69V80T
100 A	6.21 CP URGA 22.58/100	N098222	FR22UA60V100T

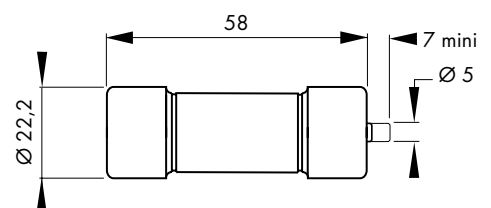

Weight: 57 g
Packaging: 10 pieces


See Gears and Fuse gears section

Other Protistor® Fuses Ferrule Fuses


14x51 URGB & 22x58 URGA - 600 V to 690 VAC

Electrical Characteristics

Time vs current characteristics

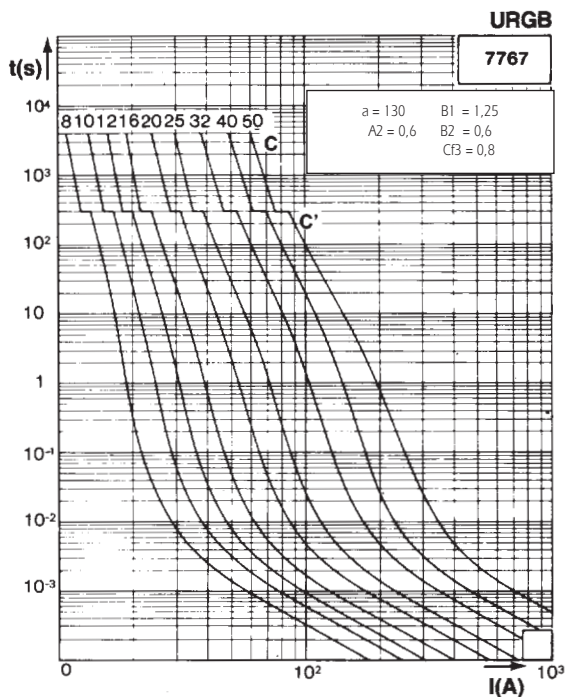

TOLERANCE OF MEAN PRE-ARCING CURRENT $\pm 10\%$

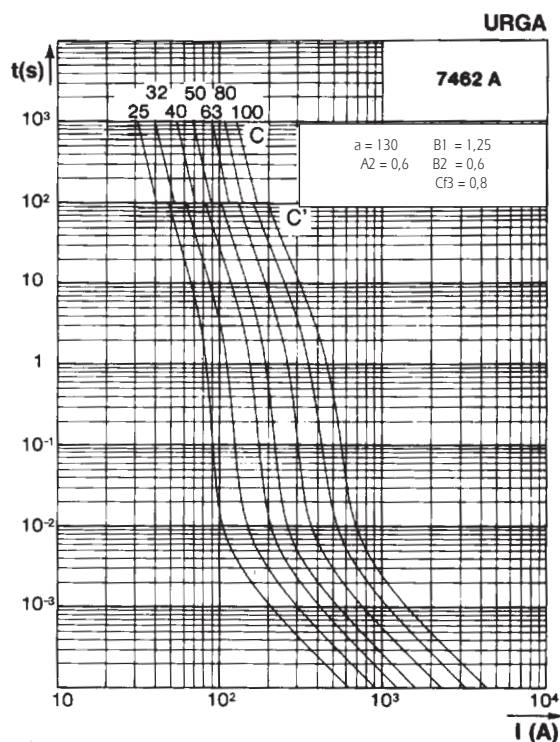

TOLERANCE FOR MEAN PRE-ARCING CURRENT $\pm 8\%$.

These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.



Other Protistor® Fuses

Ferrule Fuses


14x51 URGB & 22x58 URGA - 600 V to 690 VAC

Corrective factor - Peak arc voltage


Corrective factor

Peak arc voltage


URGB

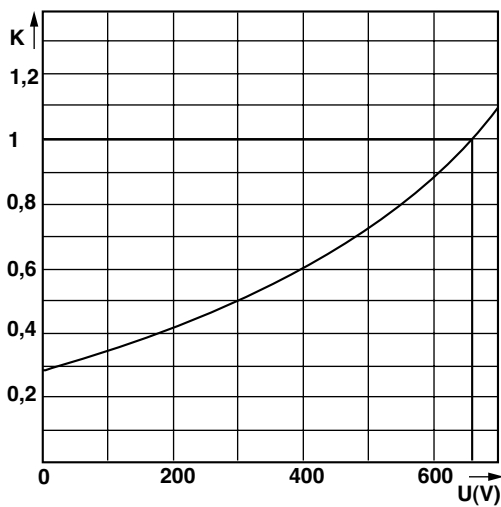


URGB

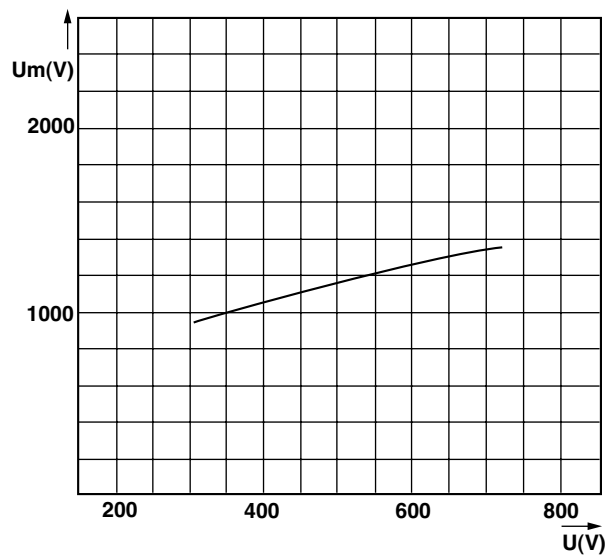

URGA

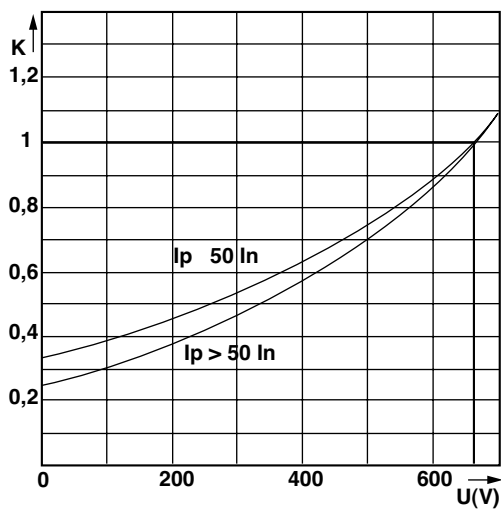

URGA

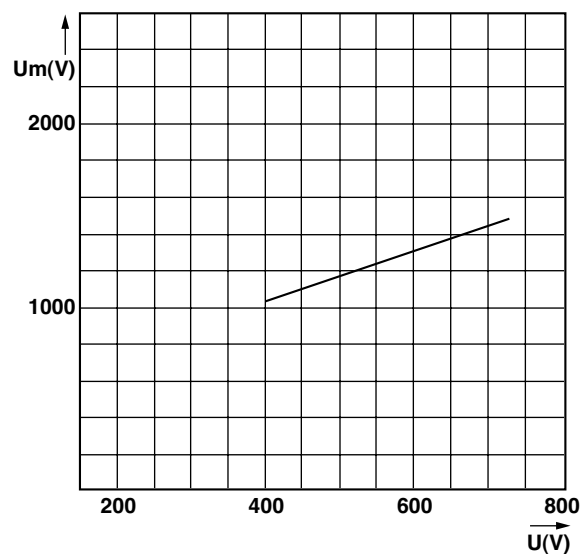

These mean curves show the variation of the total clearing time (I^2t_t) and the total clearing duration t_t as a function of operating voltage U .


This curve shows the peak value U_m of the arc voltage which appears across the fuse link as a function of operating voltage U @ $\cos \varphi = 0.15$.

Other Protistor® Fuses Ferrule Fuses 27x60 gRB - 800 VAC

800 VAC
gRB from 8 to 110 A
Size: 27 x 60

EXTREMELY HIGH BREAKING CAPACITY FUSES: PROTECTION OF POWER SEMICONDUCTORS
COMPLYING WITH IEC STANDARDS 60269-1 AND 4


800 V VOLTAGE RATING ACCORDING TO IEC 33



- gR CLASS AS PER IEC 60269-4
- CLEARING ALL OVERLOADS
 - IMPROVED SAFETY AND PROTECTION
 - ENABLING SELECTIVE COORDINATION WITH OTHER FUSES

WITH TRIP INDICATOR

Dimensions

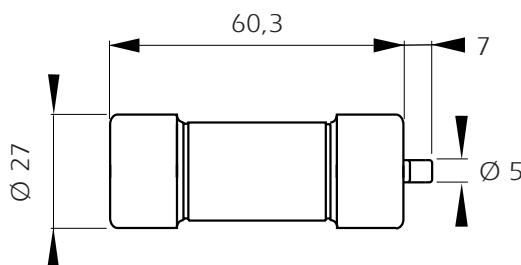

Unit weight
78 g

Trip indicator force: 4.5N at 0mm - 2.5N at 7mm

Main Characteristics


Voltage rating U_N (V)	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 \text{ ms}$ I^2tp (A2s)	Total clearing $I^2t @ U_N$ I^2tt (A2s)	Watts loss		Tested Breaking capacity	Designation	Ref. Number	Pack	Catalog Number
					0.8 I_N	I_N					
800	gRB	8	4.25	70	1.2	2.0	175 kA @ 700V	821 CP GRB27.60 8	R221436	10	FR27GB80V 8T
		10	8.0	100	1.3	2.3		821 CP GRB27.60 10	S221437	10	FR27GB80V 10T
		12	17.0	180	1.4	2.5		821 CP GRB27.60 12	T221438	10	FR27GB80V 12T
		16	26.5	250	1.9	3.5		821 CP GRB27.60 16	V221439	10	FR27GB80V 16T
		20	38.5	350	2.4	4.0		821 CP GRB27.60 20	W221440	10	FR27GB80V 20T
		25	73.0	600	2.8	5.0	90 kA @ 800V	821 CP GRB27.60 25	X221441	10	FR27GB80V 25T
		32	130	1000	3.5	6.0		821 CP GRB27.60 32	Y221442	10	FR27GB80V 32T
		40	195	1400	4.7	8.0		821 CP GRB27.60 40	Z221443	10	FR27GB80V 40T
		50	430	2700	4.8	8.5		821 CP GRB27.60 50	A221444	10	FR27GB80V 50T
		63	965	5500	5.6	10		821 CP GRB27.60 63	B221445	10	FR27GB80V 63T
		80	1890	11000	6.4	11.5		821 CP GRB27.60 80	C221446	10	FR27GB80V 80T
		100	3480	19000	7.4	13		821 CP GRB27.60 100	D221447	10	FR27GB80V 100T
		110	4670	27000	7.7	14		821 CP GRB27.60 110	E221448	10	FR27GB80V 110T

Minimum operating voltage for trip-indicator: 20 V

See Gears and Fuse gears


Other Protistor® Fuses Ferrule Fuses 27x60 gRB - 800 VAC

Total clearing I²t

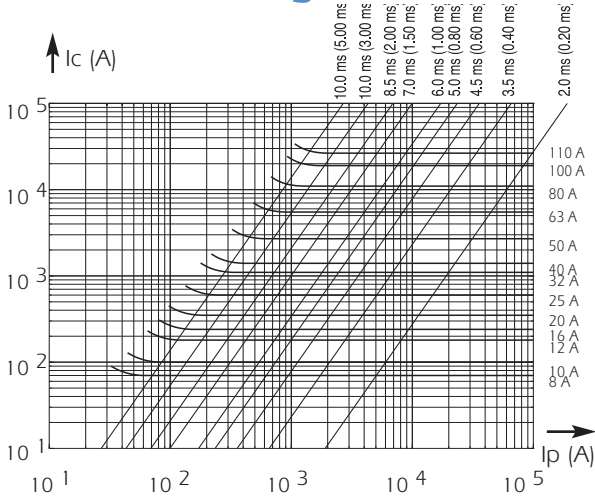


Above: Horizontal curves show maximum values of total clearing I^2t (I^2t_t) as function of prospective current I_p . @ U_N with $\cos\phi = 0.15$. Oblique lines indicate total clearing duration T_t and associated pre-arcing duration in brackets.

Current limitation curves

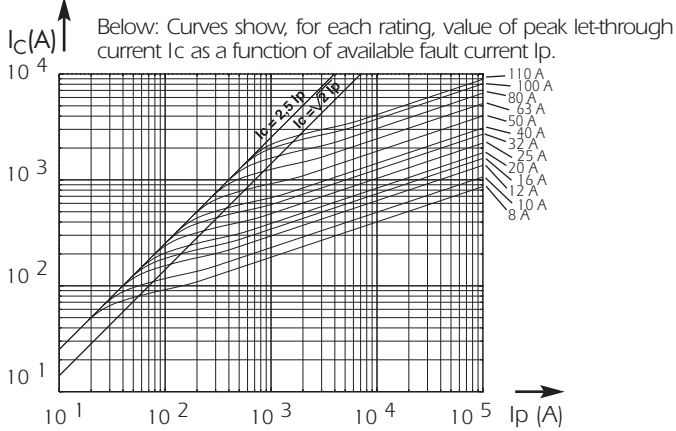


Below: Curves show, for each rating, value of peak let-through current I_c as a function of available fault current I_p .

Time vs current characteristics

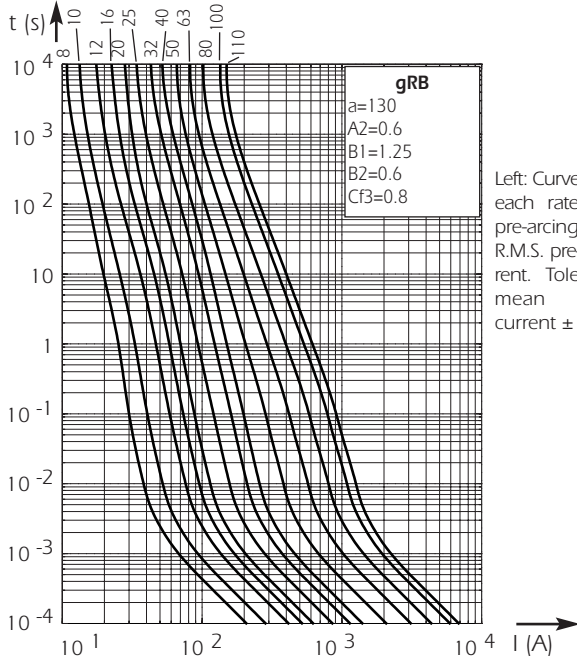


Left: Curves show, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current. Tolerance for mean pre-arcing current $\pm 8\%$.

DC Application data

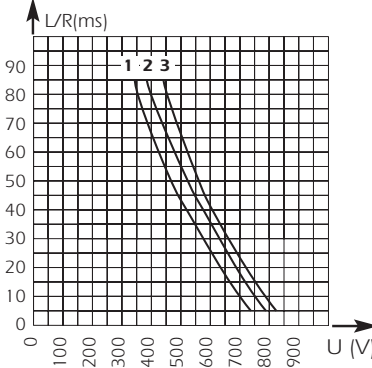


Above: Curves indicate permissible value of time constant L/R as a function of DC working voltage.
1 - I_N from 80 to 110 A / 2 - I_N from 25 to 63 A
3 - I_N from 8 to 12 A



1 - $L/R = 60$ ms / 2 - $L/R = 30$ ms


Above: Curve indicates peak arc voltage U_m which may appear across fuse terminals at working voltage U , for different values of time constant L/R of the fault circuit.

I²t corrective factor

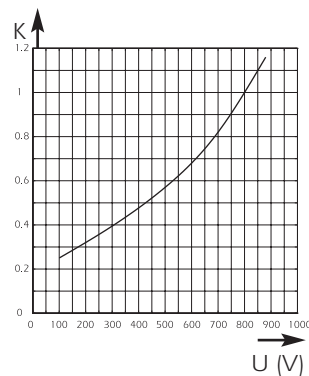


Left: Mean curve shows variation of total clearing time (I^2t_t) and total clearing duration T_t as a function of operating voltage U .

Peak arc voltage

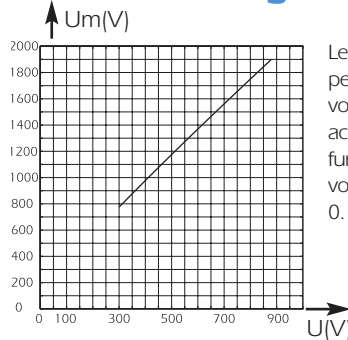

Left: Curve shows peak value U_m of arc voltage which appears across the fuse link as a function of operating voltage U @ $\cos\phi = 0.15$

Watts loss



Left: Curve enables computation of power losses P for a I_N -rated fuse as a function of the R.M.S. current I (as a multiple of I_N for steady state operation)

Other Protistor® Fuses

Ferrule Fuses

27x60 URGD - 600 V to 690 VAC



EXTREMELY BREAKING CAPACITY RATING FUSES:
PROTECTION OF POWER SEMICONDUCTORS ACCORDING TO
IEC STANDARD 60269.1 AND 4

600 V - 690 V AC VOLTAGE RATING

aR- CLASS ACCORDING TO VDE 636-23 AND IEC 60269.4

Main Characteristics

Voltage rating U_N (VAC)	Class	Current rating I_N (A)	Pre-arcing $i^2t @ 1 \text{ ms}$ I^2t_p (A ² s)	Total clearing I^2t I^2t_t (A ² s)	Watts loss		Tested Breaking capacity
					0.8 I_N	I_N	
690 V	URGD	63	405	1840 @ 660 V	12	22	200 kA @ 690 V
		80	860	3750 @ 660 V	13.5	24.6	
		100	1620	6800 @ 660 V	15	27	
		125	3425	13600 @ 660 V	16	29.5	
		160	6480	24600 @ 660 V	17	32.5	
		200	13700	61500 @ 660 V	18.5	35.7	
600 V	URGD	250	29600	107000 @ 600 V	21	40	200 kA @ 600 V


Minimum operating voltage for trip-indicator: 20 V

Ref. Numbers

27x60 - With trip-indicator

Type	Voltage	Current rating	Designation	Ref. Number	Catalog Number
URGD	690 V	63 A	6.921 CP URGD 27x60/ 63	A076820	FR27UD69V63T
		80 A	6.921 CP URGD 27x60/ 80	B076821	FR27UD69V80T
		100 A	6.921 CP URGD 27x60/100	C076822	FR27UD69V100T
		125 A	6.921 CP URGD 27x60/125	D076823	FR27UD69V125T
		160 A	6.921 CP URGD 27x60/160	E076824	FR27UD69V160T
		200 A	6.921 CP URGD 27x60/200	F076825	FR27UD69V200T
URGD	600 V	250 A	621 CP URGD 27x60/250	W076264	FR27UD60V250T

See Gears and Fuse gears section


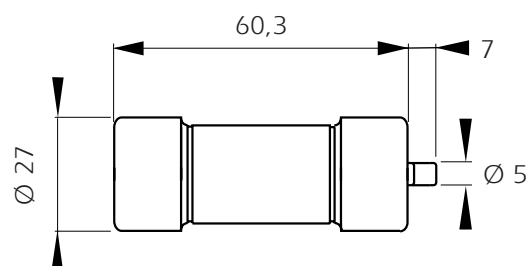


Other Protistor® Fuses

Ferrule Fuses

27x60 URGD - 600 V to 690 VAC


Time vs current characteristics

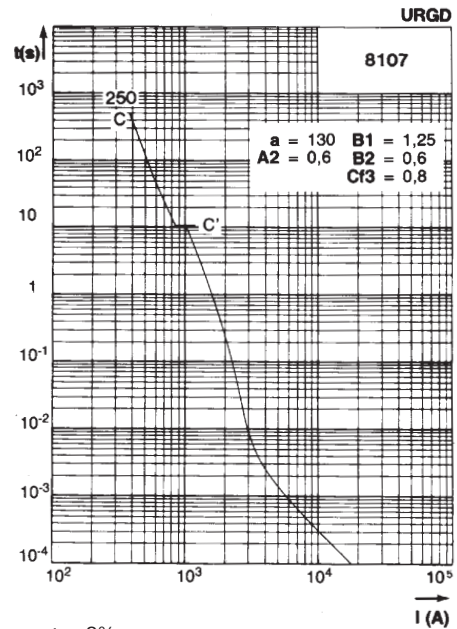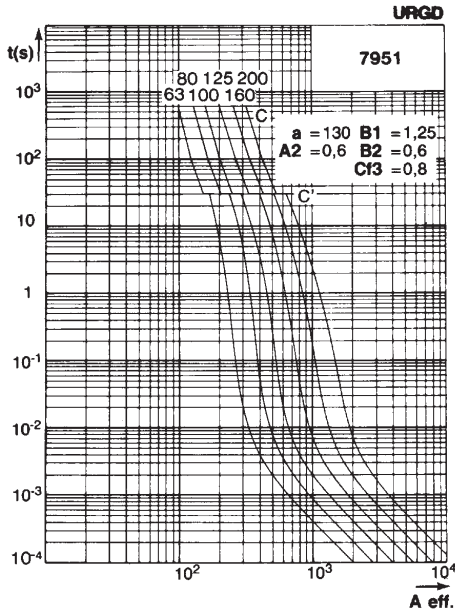


Tolerance for mean pre-arcing current $\pm 8\%$

These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.


Corrective factor

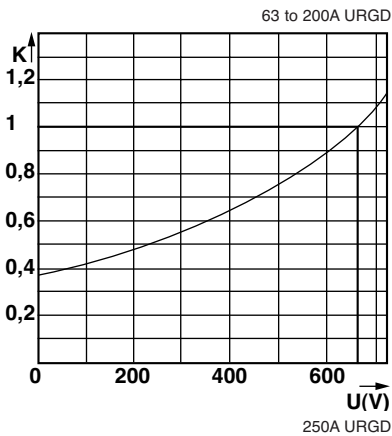


Left: Mean curves showing variation of total clearing time (I^2t_t) and the total clearing duration t_t as a function of the operating voltage U

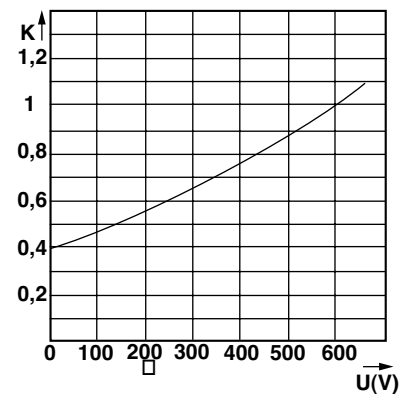

Peak arc voltage

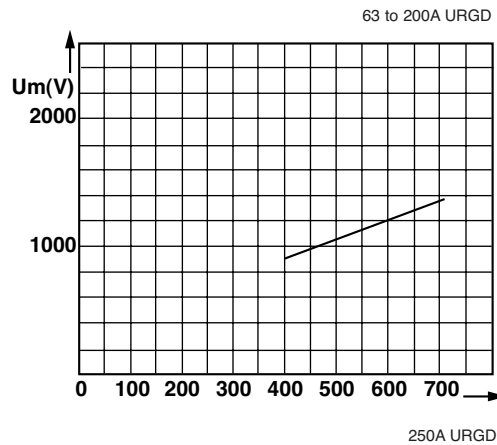

Left: Curves show peak value U_m of arc voltage which appears across the fuse-link as a function of operating voltage U @ $\cos \varphi = 0.15$.

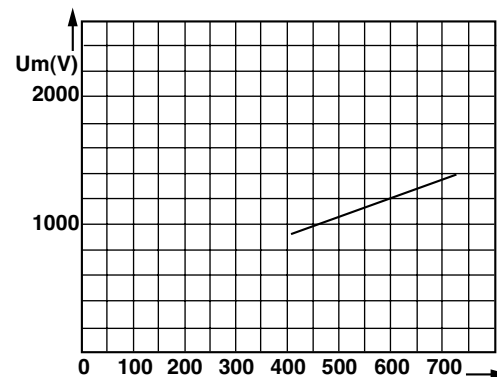

Other Protistor® Fuses

Ferrule Fuses

27x60 URQ/URS/URB - 690 V to 1000 VAC



EXTREMELY HIGH IBREAKING CAPACITY FUSES:

PROTECTION OF POWER SEMI CONDUCTORS ACCORDING TO IEC STANDARD 60269.1 AND 4

690 V - 1000 V AC VOLTAGE RATING

aR-CLASS ACCORDING TO VDE 636-23 AND IEC 60269.4

690V URQ and 1000V URB are UL RECOGNIZED

Main Characteristics

Voltage rating U_N (VAC)	Class	Current rating I_N (A)	Pre-arcing $I^2t @ 1 \text{ ms}$ I^2t_p (A ² s)	Total clearing I^2t I^2t_t (A ² s)	Watts loss		Tested Breaking capacity
					0,8 I_N	I_N	
690 V	URQ	50	110	610 @ 660 V	8.4	16	200 kA @ 690 V
		63	155	860 @ 660 V	11.1	21	
		80	350	1880 @ 660 V	12.6	24	
		100	625	3210 @ 660 V	14.2	27	
		125	1400	6970 @ 660 V	15.7	30	
		160	3150	15000 @ 660 V	17.7	34	
		200	6580	30000 @ 660 V	19.4	38	
690 V	URS	250	15570	63000 @ 660 V	22.6	45	200 kA @ 690 V
		125	2790	13000 @ 660 V	14.5	25	
		160	5500	24000 @ 660 V	17.5	30	
1000 V	URB	32	33	250 @ 1000 V	7.4	14.5	100 kA @ 1000 V
		40	60	450 @ 1000 V	8.7	17	
		50	110	840 @ 1000 V	9.7	19	
		63	200	1470 @ 1000 V	11.3	22	
		80	435	3300 @ 1000 V	12.3	24	
		100	975	6000 @ 1000 V	14	27	
		125	1910	12500 @ 1000 V	16	31	
		160	3890	26700 @ 1000 V	18	35	
		170	4710	36000 @ 1000 V	19	37	

* Minimum operating voltage for trip-indicator: 20 V



Other Protistor® Fuses

Ferrule Fuses


27x60 URQ/URS/URB - 690 V to 1000 VAC

27x60 - With trip-indicator

 Except 125 and 160A URS

Type	Voltage	Current rating	Designation	Ref. Number	Catalog Number
URO	690 V	50 A	6.921 CP URO 27x60/ 50	N075958	FR27UQ69V50T
		63 A	6.921 CP URO 27x60/ 63	V076309	FR27UQ69V63T
		80 A	6.921 CP URO 27x60/ 80	W076310	FR27UQ69V80T
		100 A	6.921 CP URO 27x60/100	R078330	FR27UQ69V100T
		125 A	6.921 CP URO 27x60/125	S078331	FR27UQ69V125T
		160 A	6.921 CP URO 27x60/160	X076311	FR27UQ69V160T
		200 A	6.921 CP URO 27x60/200	T078332	FR27UQ69V200T
URS	690 V	250 A	6.921 CP URO 27x60/250	T076308	FR27UQ69V250T
		125 A	6.921 CP URS 27x60/125	P209865	FR27US69V125T
		160 A	6.921 CP URS 27x60/160	Q209866	FR27US69V160T
URB	1000 V	32 A	1021 CP URB 27x60/ 32	S081298	FR27UB10C32T
		40 A	1021 CP URB 27x60/ 40	R081297	FR27UB10C40T
		50 A	1021 CP URB 27x60/ 50	Q081296	FR27UB10C50T
		63 A	1021 CP URB 27x60/ 63	P081295	FR27UB10C63T
		80 A	1021 CP URB 27x60/ 80	N081294	FR27UB10C80T
		100 A	1021 CP URB 27x60/100	M081293	FR27UB10C100T
		125 A	1021 CP URB 27x60/125	L081292	FR27UB10C125T
		160 A	1021 CP URB 27x60/160	K081291	FR27UB10C160T
		170 A	1021 CP URB 27x60/170	Z080338	FR27UB10C170T





See Gears and Fuse gears section

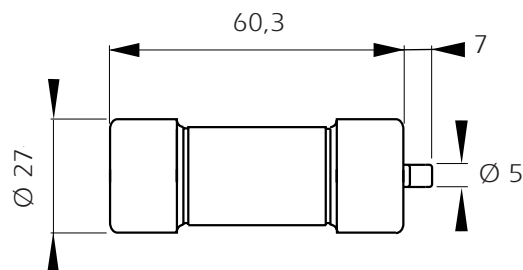

Other Protistor® Fuses Ferrule Fuses

27x60 URQ/URS/URB - 690 V to 1000 VAC

Time vs current characteristics

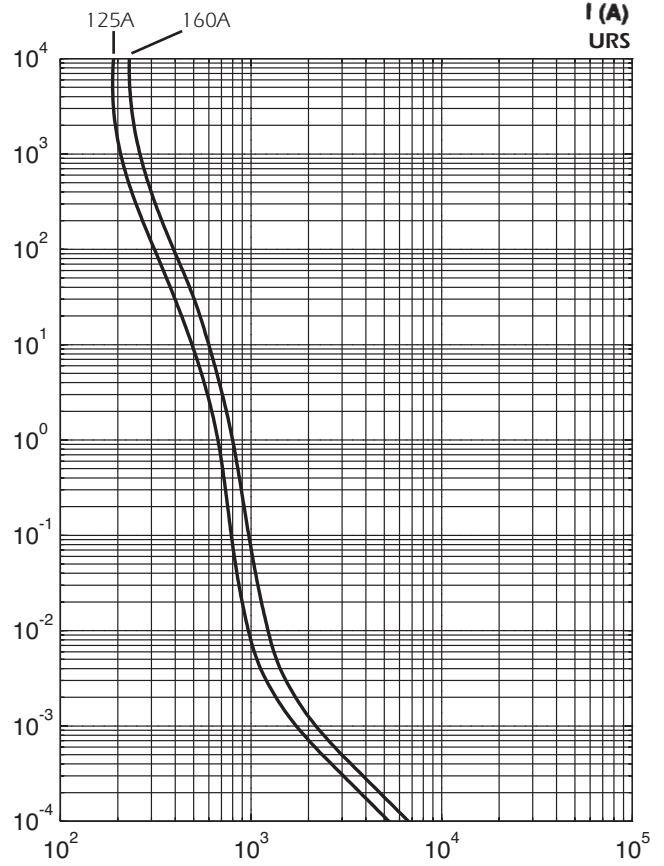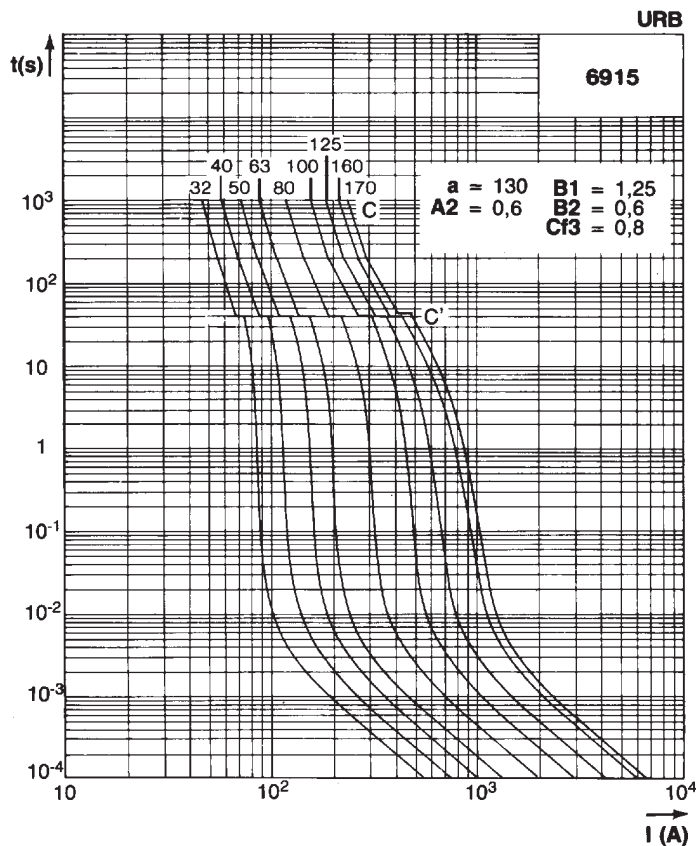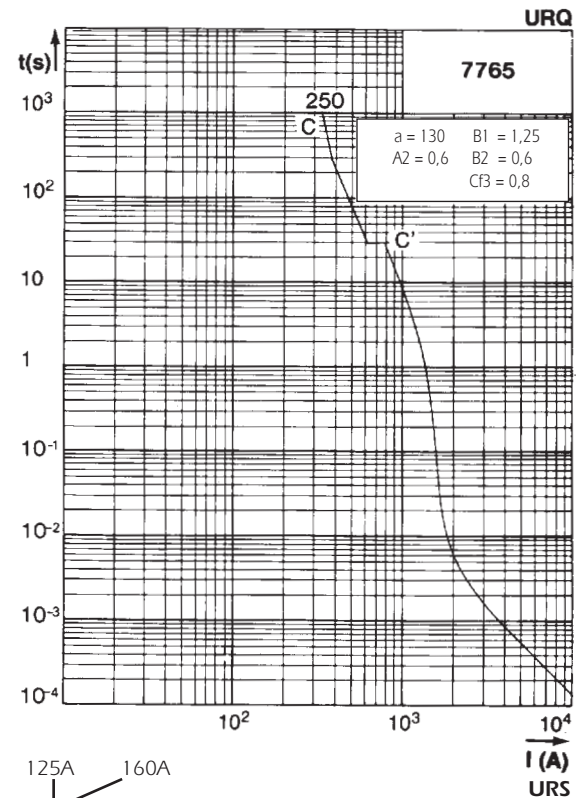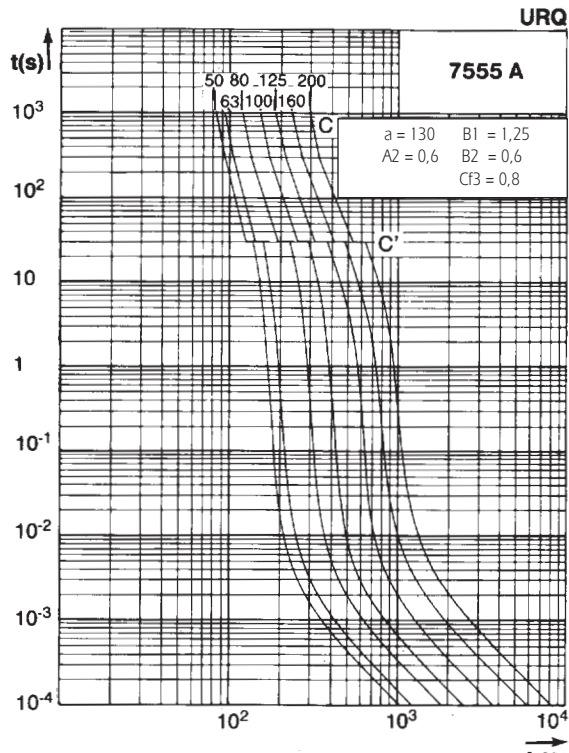

These curves indicate, for each rated current, pre-arcing time vs. R.M.S. pre-arcing current.

Tolerance for mean pre-arcing current $\pm 8\%$.

Semiconductor (AC) fuses




Other Protistor® Fuses

Ferrule Fuses


27x60 URQ/URS/URB - 690 V to 1000 VAC

Peak arc voltage

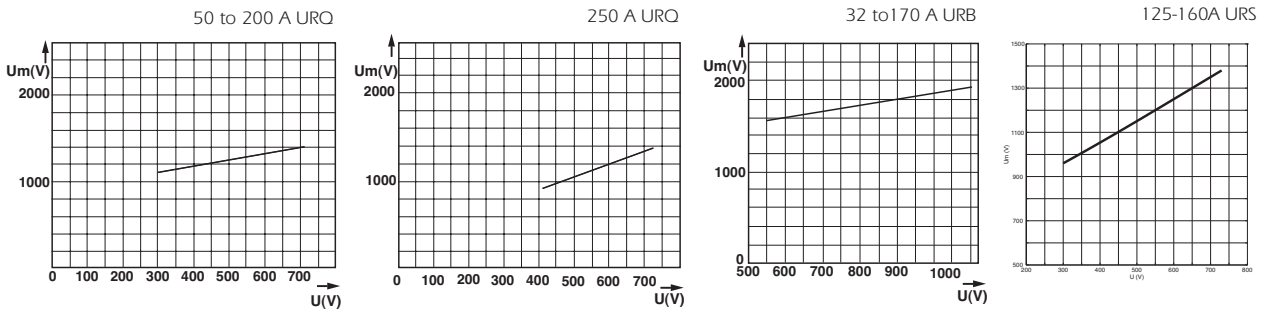


These curves show peak value U_m of arc voltage which appears across the fuse-link as a function of operating voltage $U @ \cos \varphi = 0.15$.

Corrective factor

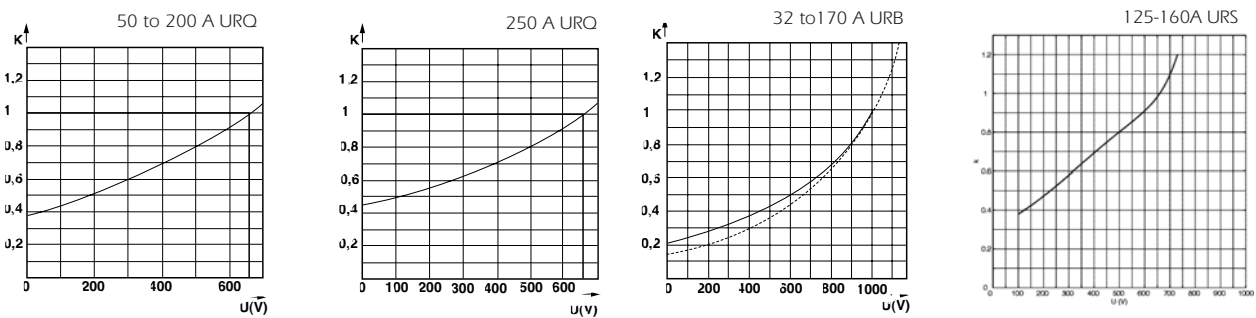

Above: Mean curves show variation of total clearing time (I^2t) and total clearing duration t_t as a function of operating voltage U .

DC Application data

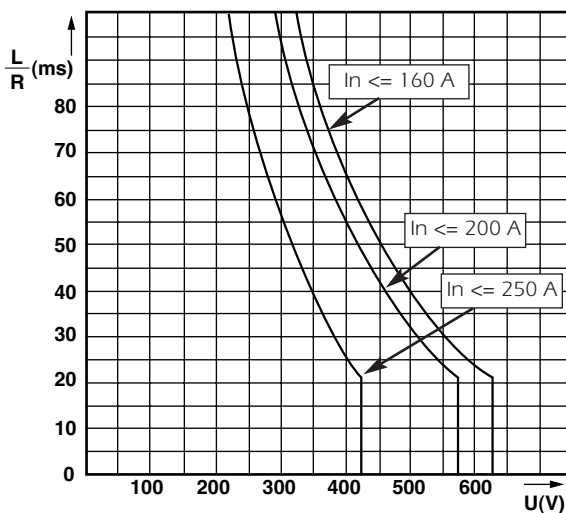

Left: Curves indicate permissible value of time constant L/r as a function of the DC working voltage