

Surface Mount

Bi-Directional Coupler

SYDC-20-13HP+

50Ω 20 dB Coupling 40 to 1000 MHz 10 Watt



Generic photo used for illustration purposes only

CASE STYLE: AH202-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
13"	200

Maximum Ratings

*Operating Temperature, Case -40°C to 85°C
 Storage Temperature -55°C to 100°C
 * Case temperature is defined as temperature on ground leads.
 Permanent damage may occur if any of these limits are exceeded.

Pad Connections

INPUT	8
OUTPUT	1
COUPLED (forward)	5
COUPLED (reverse)	4
GROUND	2,3,6,7

Features

- wideband frequency, 40-1000 MHz
- low mainline loss, 0.4 dB typ.
- high power handling, 10 Watt

Applications

- VHF/UHF reverse / transmitters
- cellular


Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		40		1000	MHz
Mainline Loss ¹	40 - 1000	—	0.4	1.1	dB
Nominal Coupling	40 - 1000	—	20±1.0	—	dB
Coupling Flatness (±)	40 - 1000	—	0.9	—	dB
Directivity	40 - 1000	14	28	—	dB
Return Loss (Input)	40 - 1000	—	13	—	dB
Input Power ²	40 - 1000	—	—	10	W

1. Mainline loss includes theoretical power loss at coupled port.

2. The user must provide adequate means of heat removal to limit the temperature of ground connections 2,3,6,7 to 85°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 27°C/W or less when the unit is driven at maximum specified RF input power, 10W. At higher ambient temperature, with the same heat sink. Input power in watts must not exceed 10W x (85°C - T_ambient) ÷ 60°C.


Outline Drawing

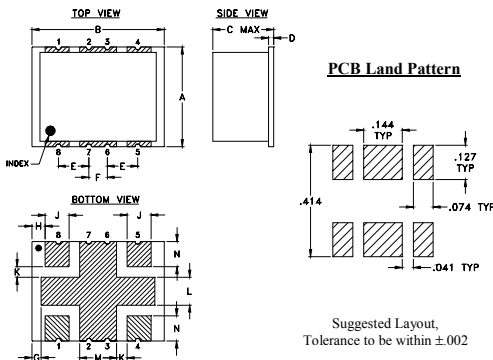

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.38	.50	.25	.020	.115	.070	.035
9.65	12.70	6.35	0.51	2.92	1.78	0.89
H	J	K	L	M	N	wt
.050	.090	.040	.105	.140	.095	grams
1.27	2.29	1.02	2.67	3.56	2.41	0.80

Demo Board MCL P/N: TB-349
 Suggested PCB Layout (PL-246)

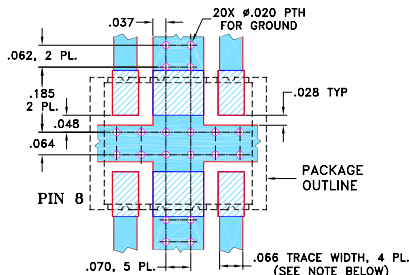

NOTES:


1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Electrical Schematic

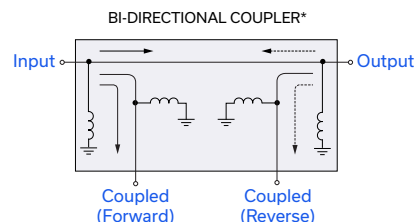

*Electrical schematic is for Bi-Directional coupler with internal transformer(s) that routes DC from all ports to ground






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
 ECO-015369
 ED-12804/1
 SYDC-20-13HP+
 DY/CP/AM
 221018

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
40	0.10	19.36	19.51	19.01	18.84	20.45	20.20	18.37	18.14
100	0.12	19.30	19.34	25.29	22.07	34.36	34.34	32.77	32.57
200	0.21	19.35	19.50	28.64	22.40	35.48	37.54	32.79	34.08
300	0.24	19.44	19.64	30.84	22.72	29.08	28.84	26.69	26.39
400	0.28	19.54	19.79	33.82	23.56	25.58	25.01	23.56	22.77
500	0.32	19.64	19.95	37.70	24.76	23.31	22.56	21.29	20.34
600	0.37	19.75	20.12	38.46	25.88	21.69	20.56	19.54	18.67
700	0.42	19.88	20.29	33.39	27.81	20.49	19.21	18.26	17.32
800	0.49	20.05	20.48	28.31	28.38	19.53	18.13	17.35	16.22
1000	0.66	20.51	20.83	20.87	25.33	18.01	16.40	16.08	14.50

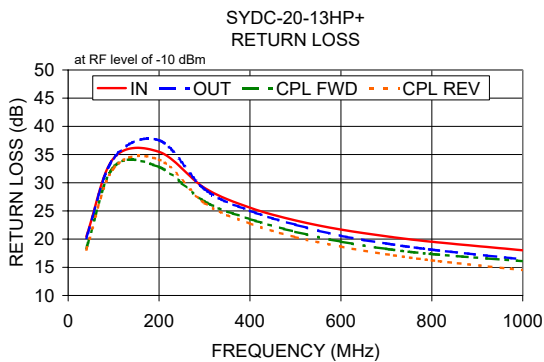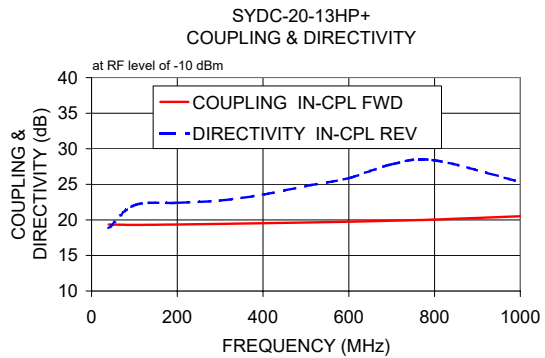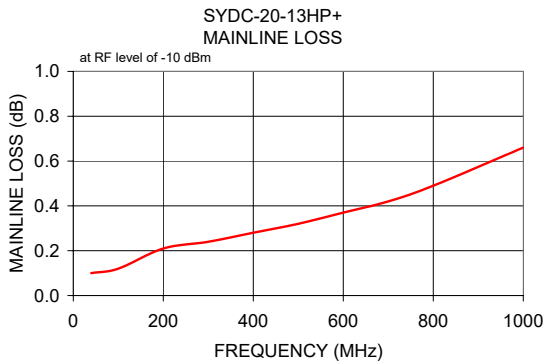

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

