

# Coaxial Power Splitter/Combiner

## ZFSC-10-1+ ZFSC-10-1

10 Way-0° 50Ω 0.5 to 100 MHz



BNC version shown  
CASE STYLE: RR93

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.87W max.

### Coaxial Connections

SUM PORT	S
PORT 1,2,3,.....,10	1,2,3,.....,10

### Features

- low insertion loss, 0.4 dB typ.
- high isolation, 30 dB typ.
- rugged shielded case

### Applications

- VF/VHF
- radio communication
- instrumentation

Connectors	Model	Price	Qty.
BNC	ZFSC-10-1(+)	\$119.95	(1-9)
SMA	ZFSC-10-1-S(+)	\$154.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 10 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)							
	L	M	U	L	M	U	L	M	U	L	M	U					
$f_L$ - $f_U$	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.					
0.5-100	28	20	30	24	27	20	0.5	0.8	1.0	0.8	1.5	3	6	10	0.2	0.3	0.4

L = low range [ $f_L$  to 10  $f_L$ ] M = mid range [10  $f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]

### Outline Drawing

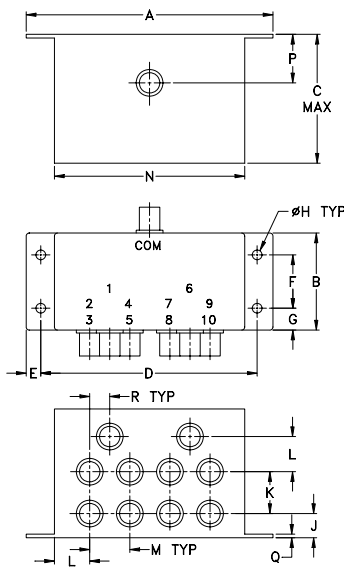




### Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
4.06	1.60	2.125	3.56	.25	.88	.36	.160
103.12	40.64	53.98	90.42	6.35	22.35	9.14	4.06
J	K	L	M	N	P	Q	R
.40	.69	.58	.66	3.13	.80	.06	.33
10.16	17.53	14.73	16.76	79.50	20.32	1.52	8.38


wt. 350 grams

### Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 1
			1-2	1-5			
0.50	10.57	0.05	31.20	24.61	0.10	1.24	1.57
1.00	10.54	0.04	33.11	28.09	0.11	1.14	1.37
5.00	10.34	0.04	35.75	35.27	0.38	1.09	1.18
11.00	10.32	0.02	35.66	36.98	0.64	1.12	1.14
20.00	10.37	0.02	33.61	34.11	1.14	1.18	1.13
32.00	10.44	0.01	30.89	30.87	1.72	1.27	1.13
41.00	10.52	0.02	29.24	29.11	2.20	1.35	1.13
50.00	10.58	0.03	27.88	27.70	2.59	1.42	1.13
62.00	10.67	0.03	26.39	26.22	3.16	1.52	1.14
71.00	10.72	0.05	25.48	25.30	3.58	1.60	1.14
80.00	10.77	0.05	24.69	24.50	4.01	1.67	1.14
92.00	10.92	0.07	23.84	23.65	4.53	1.76	1.14
96.00	10.96	0.08	23.58	23.39	4.78	1.79	1.14
100.00	11.02	0.08	23.36	23.17	4.97	1.82	1.14

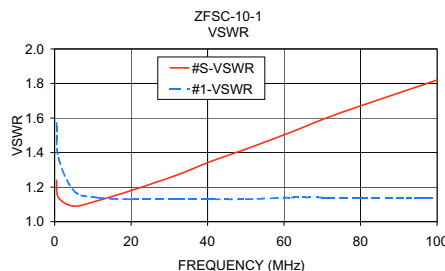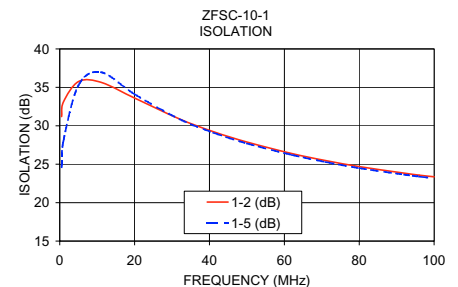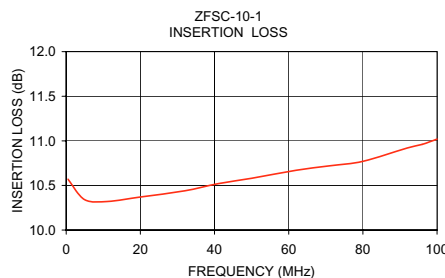

### electrical schematic

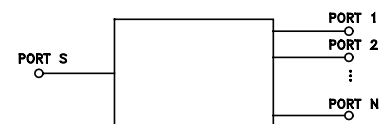

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. B  
M112930  
ZFSC-10-1  
HY/TD/CP/AM  
071009