
REVISIONS								
REV	DESCRIPTION	DATE	APPROVED					
Α	INITIAL RELEASE	12/08/10	A.D.M.					

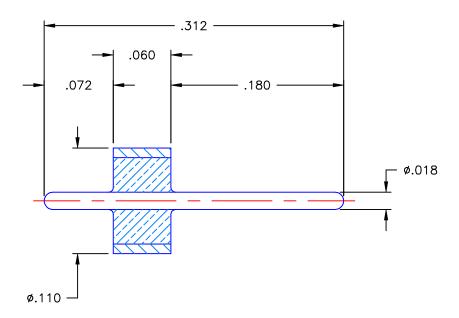

## NOTES:

1. MATERIALS:

OUTER RING AND PIN = KOVAR GLASS BEAD = CORNING 7070

2. FINISH:

OUTER RING AND PIN = GOLD PLATE PER MIL-G-45204, TYPE II, GRADE C, CLASS I, OVER NICKEL PER MIL-C-26074, CLASS I, OVER COPPER PER MIL-C-14550.

3. ASSEMBLY TO HAVE LEAK RATE LESS THAN 1 x  $10^{-8}$  cc/sec.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON  DECIMAL ANGLE		DWN: DATE A.D.M. 12/08/10 CHKD: DATE D.N. 12/08/10 APVD: DATE J.M. 12/08/10		Property of Radiall  This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.					
				GLASS SEAL ASSEMBLY 50 OHM CONTROL DRAWING					
REFERENCE:		MATERIALS & FINISHES:  SEE NOTES		SIZE A	FSCM NO. 19505	DWG NO.	920-5	6	REV A
ORIGINATOR: A.D.M. DATE: 12/08/10	RIGINATOR: A.D.M. ATE: 12/08/10				10:1	THIRD A PROJEC		SHEET 1 C	)F 1

20-56